




EVERY BUILDING MATTERS

NEW VRF FSV SYSTEMS 2013 / 2014


 Do not add or replace refrigerant other than the specified type.
 Manufacturer is not responsible for the damage and deterioration in safety due to usage of other refrigerant.

• Specifications are subject to change without prior notice for further improvement • The contents of this catalogue are effective as of April, 2013
 • Due to printing considerations, the actual colours may vary slightly from those shown • All graphics are provided merely for the purpose of illustrating a point.





PANASONIC AIR CONDITIONING DESIGNED TO CARE FOR YOUR PROJECTS.

With more than 30 years of experience, exporting to more than 120 countries around the world, Panasonic is unquestionably one of the leaders in the air conditioning sector. The company is also a world leader in innovation as it has filed more than 91,539 patents to improve its customers' lives. Moreover, Panasonic is determined to remain at the forefront of its market. In all, the company has produced more than 200 million compressors and its products, particularly residential air conditioners, now hold the No. 1 market share in Japan and other major countries in Asia. You can be assured of the extremely high quality of Panasonic's air conditioners.

This wish to excel has made Panasonic the international leader in air conditioning solutions. The company's industrial capacity and firm commitment to the environment has enabled it to open new avenues of research and to develop innovative technologies to enrich customers' way of life. Panasonic offers a range of turnkey air conditioning solutions for homes, medium-sized buildings such as offices and restaurants, and large-scale buildings. These offer maximum effectiveness, comply with the strictest environmental standards and meet the most avant-garde construction requirements of our time.

At Panasonic we know what a great responsibility it is to install cooling and heating systems. Because offering you the best solutions in cooling and heating matters.

EVERY BUILDING MATTERS



CONTENTS

02	Introduction
04	Panasonic New FSV Systems
06	2-WAY FSV ME1 Series
20	2-WAY Mini-FSV LE1 Series
28	3-WAY FSV MF2 Series
40	Panasonic Design Support Software
42	FSV Indoor Units
44	Product Range
47	U1 Type / 4-Way Cassette
50	Y2 Type / 4-Way Mini Cassette
52	Y1 Type / 4-Way Mini Cassette
54	L1 Type / 2-Way Cassette
56	D1 Type / 1-Way Cassette
58	F2 Type / Mid Static Ducted
62	M1 Type / Slim Low Static Ducted
64	Z1 Type / Slim Low Static Ducted Twenty Series
66	E1 Type / High Static Ducted
68	T1 Type / Ceiling Mounted
70	K2-K1 Type / Wall Mounted
74	P1 Type / Floor Standing
76	R1 Type / Concealed Floor Standing
78	FSV Controllers
80	Individual Control Systems
83	Centralised Control Systems
84	Web Interface Systems
86	P-AIMS
88	T10 Terminals for External Control
89	Interfaces for External Control
90	Serial Interface for 3rd Party External Controller
91	Serial Interface for LonWorks Network
92	Controller External Dimensions
94	VRF Renewal



New FSV Systems

FSV systems are designed for energy savings, easy installation, and high efficiency. Ever evolving, Panasonic uses advanced technologies to meet the requirements of diverse situations and contribute to the creation of comfortable living spaces.



2-WAY FSV ME1 Series

Newly designed next generation VRF!

Cooling or Heating Type

- Wide range of systems from 22.4 kW to 168 kW
- Top class EER : 4.04 / COP : 4.56 (in the case of 22.4 kW)
- Longer max piping length (up to 1000 m)
- Increased max number of connectable indoor units (up to 64)
- Cooling operation is possible when outdoor temperature as high as 46°C DB
- Extended operating range to provide heating at outdoor temperature as low as -25°C WB
- Suitable for R22 renewal projects



Hi-durable model is available.



2-WAY mini-FSV LE1 Series

For small-scale commercial and residential use

Cooling or Heating Type 1 phase
Cooling or Heating Type 3-phase

- Applicable to both single and three phase power supplies
- Top-class EER: 4.3 / COP: 4.62 (In case of 12.1 kW)
- Cooling operation is possible up to 46°C DB outdoor temperature
- Heating operation is possible when outdoor temperature as low as -20°C WB
- 9 units connectable to one outdoor unit (in the case of 15.5 kW)
- Piping length: 120m (Total piping length: 150m)

Industry
Top Class
EER/COP



Super High COP Series

Enables further energy saving

Cooling or Heating Type

- Wide range of systems from 28 kW to 135 kW
- High COP especially large capacity zone (107 kW=COP:4.08)
- Longer max piping length (up to 1000 m)
- Increased max number of connectable indoor units (up to 64)
- Cooling operation is possible when outdoor temperature as high as 46°C DB
- Extended operating range to provide heating at outdoor temperature as low as -25°C WB
- Suitable for R22 renewal projects

HIGH COP
SETTING
MODEL



NEW

3-WAY FSV MF2 Series

For simultaneous heating and cooling operation

Cooling and Heating
Simultaneous Type

- Wide range of systems from 22.4 kW to 118 kW
- Top class EER : 4.50 / COP : 4.77 (in the case of 22.4 kW)
- Longer max piping length (up to 500 m)
- Increased max number of connectable indoor units (up to 52)
- Cooling operation is possible when outdoor temperature as high as 46°C DB
- Extended operating range to provide heating at outdoor temperature as low as -20°C WB
- Suitable for R22 renewal projects

Heat
Recovery
Type



Hi-durable model is available.



Benefits

Ease of installation

R410A has a higher operating pressure with a lower pressure loss than previous refrigerants. This enables smaller pipe sizes to be used and allows reduced refrigerant charges.

Simple to design

Panasonic recognises that designing, selecting and preparing a professional VRF quotation can be a time consuming and costly process, especially as it is often also a speculative exercise. We have proprietary design software which is quick and easy to use and produces a full schematic layout of pipework and controls, detailed material listing and performance data.

Easy to control

A wide variety of control options are available to ensure that FSV systems provide the user with flexible degree of control, from simple room controllers to state of the art Building Management System (BMS) control.

Simple to commission

Simple set-up procedures including automatic address setting of connected indoor units enables configuration setting to be made from an outdoor unit or via remote controller.

Accurate capacity control

To ensure that the compressor capacity is matched to building load as accurately and efficiently as possible, Panasonic has designed its range of 2-WAY / 3-WAY FSV systems to operate with DC inverter and high-efficiency fixed speed compressors. The system selects the most efficient compressor to operate by dynamically monitoring the building load and choosing the best compressor combination to run.

Easy to position

The compact design of the ME1 outdoor units enables 22.4 kW to 33.5 kW to fit into a standard lift and are easy to handle and position when on site. Space-saving and modular in design ensures building appearance can be maintained.

Discharge air temperature control

Panasonic ducted units offer the unique advantage of being able to control discharge air temperature for accurate room temperature control, and to reduce cold drafts during heating operation. This is achieved without any extra controls or wiring to each unit.

Wide selection and connectivity

With a selection of 11 indoor model types, FSV systems are the ideal choice for multiple small capacity indoor unit installations, with the ability to connect up to 64 indoor units for 2-WAY ME1 series and up to 52 indoor unit for 3-WAY MF2 series.

Easy to maintain

Each system allows the use of prognostic and diagnostic controls routines, from refrigerant charge control to complex fault code diagnostics, all designed to expedite maintenance calls and reduce unit down time.

Lower running and life cycle costs

Panasonic FSV is amongst the most efficient VRF systems in the market. The systems are also designed to make sure that we reduce the running cost of each system by using our unique road map control routine to ensure that the most efficient combination of compressors are running at any one time. Improved defrost sequencing also reduces running cost by defrosting each outdoor coil in turn when conditions allow.



High-efficiency & large-capacity VRF system

2-WAY FSV ME1 Series

Newly designed next generation VRF!




Large-capacity R410A VRF systems with advanced technology.

- Compact outdoor units
- Bigger capacity in one outdoor unit (Max 56 kW)
- Wider range of systems (Max 168 kW)
- Long Max piping length up to 1000 m
- Increased connectable capacity ratio up to 200%
- Demand response ready (AS4755 Compliant)
- Up to 64 indoor units connectable
- High outdoor unit static pressure up to 80 Pa
- Extended operating range to provide heating at outdoor temperature as low as -25°C WB
- Cooling is possible as high as 46°C DB
- Suitable for R22 renewal projects (Refer to Page 94)
- Super High COP mode available by dip switch setting
- Hi-durable model is available



Energy-saving concept.

The use of energy saving designs for the structure of fans, fan motors, compressors and heat exchangers results in high COP values which rank among the top class in the industry. In addition, use of highly efficient R410A refrigerant reduces CO2 emissions and lowers operating costs.

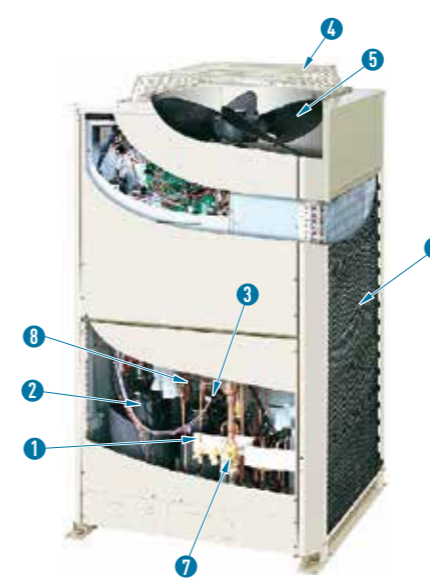

- 1 Panasonic Inverter compressor** Large-capacity inverter compressor's are utilised up to a maximum of 28 kW each. The inverter compressor is superior in performance with improved partial-load capacity.
- 2 Constant-speed compressor** A constant-speed, large-capacity scroll compressor has been newly developed. Two compressors are utilised up to 45 kW whilst three compressors are utilised up to 56 kW.
- 3 Accumulator** The accumulator capacity has been increased to maintain compressor reliability because of the increased refrigerant quantity, which allows an extended max piping length. Furthermore, the refrigerant pressure loss is reduced, which contributes to an improved operating efficiency.
- 4 Fan guard** The fan wire guard has been newly designed. This results in a reduced air resistance and ventilation noise.
- 5 Newly designed high performance fan** Fan rotational efficiency has been increased as the fan can operate on constant airflow even at high outdoor unit external static pressure.
- 6 Heat exchanger copper tubes, heat exchanger fins** The heat exchanger size, tubes, and fins have been redesigned to increase efficiency.
- 7 Sub-cooling circuit** Large capacity outdoor unit utilises double piping with top grade tubing to improve heat transfer efficiency.
- 8 Oil separator** Centrifugal separator is used to improve oil separation efficiency and reduce refrigerant pressure loss.

High-efficiency & large-capacity VRF system 2-WAY FSV ME1 Series

A large number of indoor units can be connected


Up to 64 indoor units can be connected in a single system for ultimate design flexibility.

Up to 64 Indoor Units Connectable!*

*Maximum number of indoor units depends on outdoor unit capacity.

Increased piping length for greater design flexibility

Adaptable to various building types and sizes
Actual piping length : 180m
Max piping length : 1000m

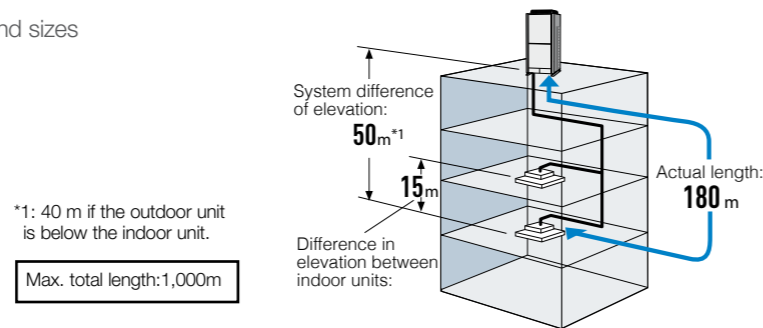

Connectable indoor/outdoor unit capacity ratio up to 200%

FSV systems attain maximum indoor unit connection capacity of up to 200 % of the unit's connection range, depending on the outdoor and indoor models selected. So for a reasonable investment, FSV systems provide an ideal air conditioning solution for locations where full cooling/heating are not always required.

SYSTEM / kW	22.4	28.0	33.5	40.0	45.0	50.0	56.0	61.5	68.0	73.0	78.5	85.0	90.0	96.0
MNcIU : 130%	13	16	19	23	26	29	33	36	40	43	47	50	53	56
MNcIU : 200%	20	25	30	35	40	45	50	55	60	64	64	64	64	64


SYSTEM / kW	101.0	107.0	113.0	118.0	124.0	130.0	135.0	140.0	145.0	151.0	156.0	162.0	168.0
MNcIU : 130%	59	64	64	64	64	64	64	64	64	64	64	64	64
MNcIU : 200%	64	64	64	64	64	64	64	64	64	64	64	64	64

MNcIU : Maximum Number of Connectable Indoor Unit

Note: If more than 100% indoor units are operated with a high load, the units may not perform at the rated capacity. For the details, please consult with an authorised Panasonic dealer.


Excellent energy savings

The operation efficiency has been improved using highly efficient R410A refrigerant, new DC inverter compressor, new DC motor and new heat exchanger design.

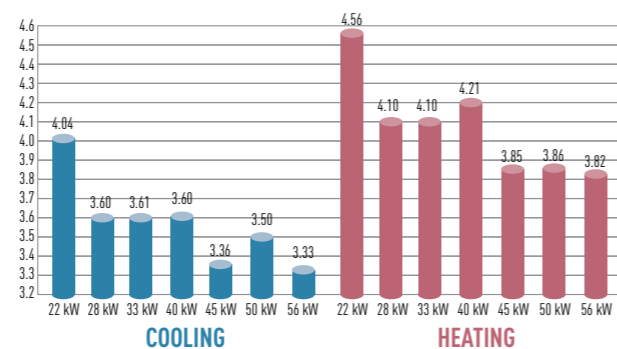

Up to 50m piping after first branch


Up to 64 units can be connected to one system. Flexible piping layout makes it easier to design systems for locations such as train stations, airports, schools, hospitals, and aged care facilities.

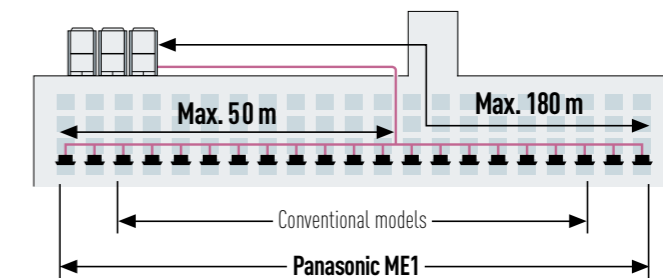

Extended operating range


Heating operation range:

Extended heating operation range enables heating even when the outdoor temperature is as low as -25°C. Using a wired remote control, indoor heating temperature range can be set from 16°C to 30°C*.

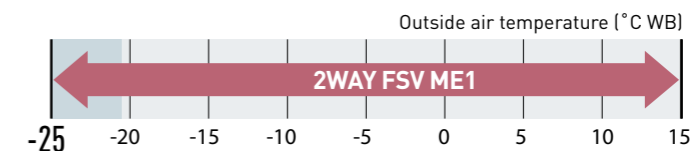

Cooling operation range:


-10°C DB to +46°C DB

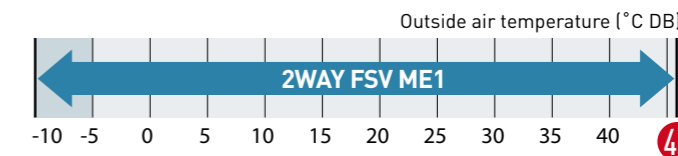

* Depending on the type of remote controller.

Compact design


The new ME1 series has reduced the installation space required with up to 56 kW available in a single chassis. 22.4-33.5 kW are able to fit inside a lift for easy handling on site.

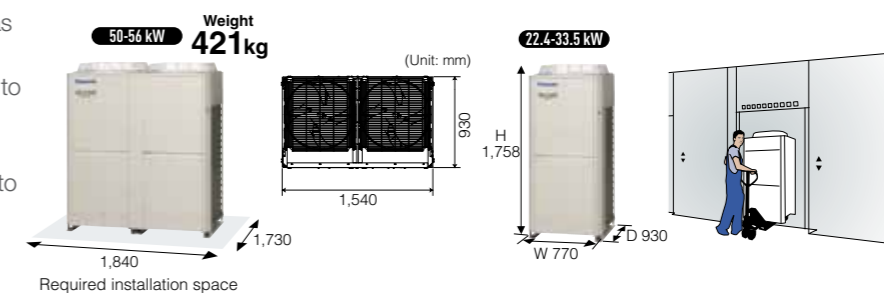

Newly designed fan


Optimised air flow

Newly designed fan and bell-mouth reduces stress on the fan by dispersing air quickly. Thus, lower air resistance results in lower energy consumption.



Noise reduction

Turbulence (blue) can be suppressed and the unwanted noise can be reduced. Even though a high speed fan is utilised, the noise level is still very low.



High-efficiency & large-capacity VRF system 2-WAY FSV ME1 Series

High outdoor unit static pressure


Customisable on site settings allow all models to provide up to 80Pa due to newly designed fan, fan guard, fan motor and casing. The flexible design allows connection of an air discharge duct to avoid a reduction in performance due to a shortage of air circulation. This feature allows the outdoor unit to be installed inside balconies on every floor of tall buildings.



Extended compressor life by uniform compressor operation time


The total run-time of compressors are monitored by a built-in microcomputer, which ensures that operation times of all compressors within the same refrigerant circuit are balanced.

Compressors with histories showing shorter run times are selected first, ensuring equal wear and tear across all units and extended the working life of the system.

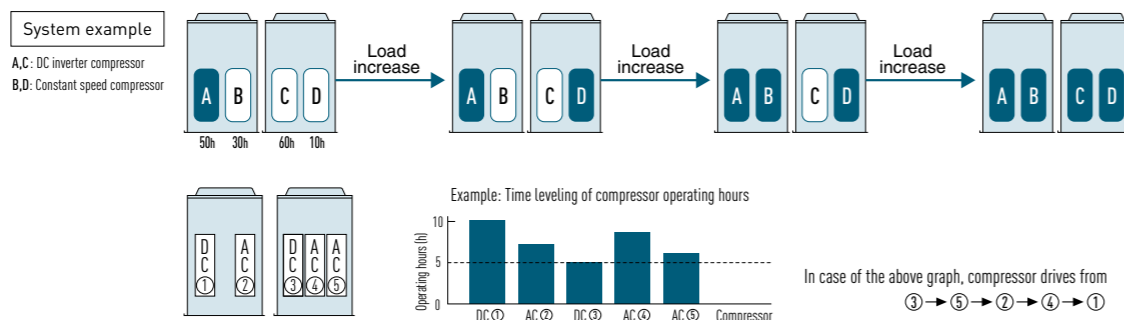

Automatic backup operation in the case of compressor failure or outdoor unit malfunction


(Except for 22.4 kW & 28 kW single unit installation)
*Backup operation allows uninterrupted cooling or heating to continue whilst waiting for service. Users should contact their authorised service centre as soon as fault occurs.

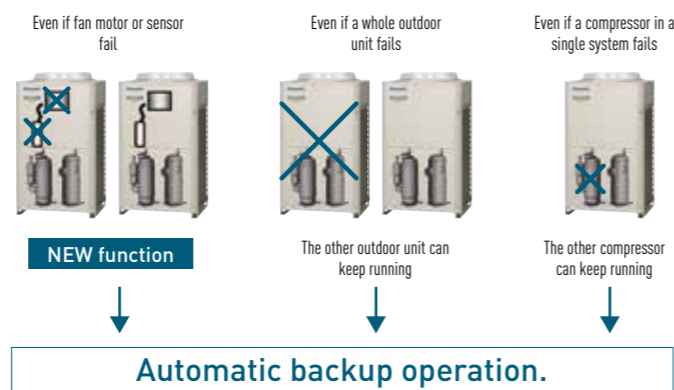

Demand response

Featuring inverter control technology, all Panasonic FSV systems are Demand Response Management (DRM) ready. With this control, power consumption at times of peak load can be set in three steps to deliver optimum performance. This feature is fully compliant with both AS4755 and AS3823, which are due to be implemented shortly.


Demand control terminal is available to control 0-50-75-100% of capacities.

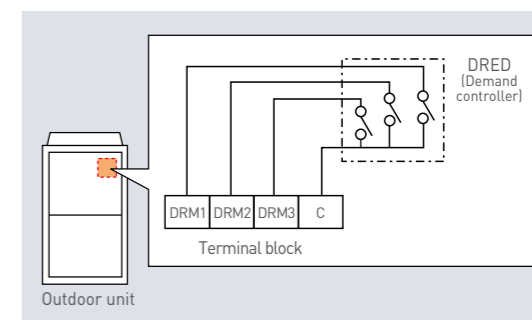

Demand Response Signal	Power Input
DRM 1	0%
DRM 2	50%
DRM 3	75%

Flexible Demand Response with the CZ-CAPDC2*1

Setting is possible as 0% or in the range from 40 to 100% (in steps of 5%). At the time of shipping, setting has been done to the three steps of 0%, 70% and 100%.

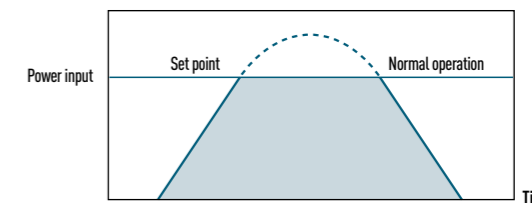

	Power input	
Level 1	100% (Preset)	Possible to change 40-100%
Level 2	70% (Preset)	
Level 3	0% (Always in stop condition)	


*1 An outdoor Seri-Para I/O unit (CZ-CAPDC2) is required for demand input signal.

Hi-durable model available

[On Demand Production]

A hi-durable model is available that can withstand corrosive environments to provide extended life. As well as the heat exchanger, various other parts are specially treated for further durability.

Note: Selecting this unit does not completely eliminate the possibility of rust developing. For details concerning unit installation and maintenance, please consult an authorised dealer.


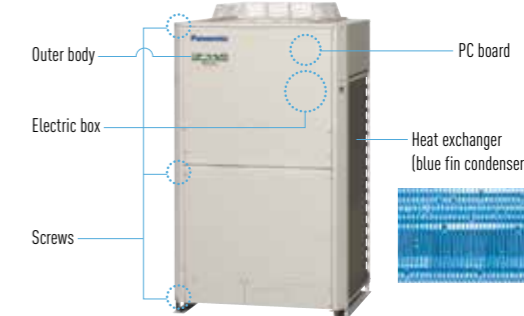


2-WAY FSV ME1 Series

Appearance																														
kW		22.4	28.0	33.5	40.0	45.0	50.0	56.0	61.5	68.0	73.0	78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0	124.0	130.0	135.0	140.0	145.0	151.0	156.0	162.0	168.0		
Model name		U-8ME1R8	U-10ME1R8	U-12ME1R8	U-14ME1R8	U-16ME1R8	U-18ME1R8	U-20ME1R8	U-14ME1R8 U-8ME1R8	U-14ME1R8 U-10ME1R8	U-14ME1R8 U-12ME1R8	U-16ME1R8	U-16ME1R8 U-14ME1R8	U-16ME1R8 U-16ME1R8	U-18ME1R8 U-16ME1R8	U-20ME1R8 U-18ME1R8	U-20ME1R8 U-20ME1R8	U-16ME1R8 U-14ME1R8	U-16ME1R8 U-12ME1R8	U-16ME1R8 U-14ME1R8	U-16ME1R8 U-16ME1R8	U-18ME1R8 U-16ME1R8	U-18ME1R8 U-16ME1R8	U-20ME1R8 U-16ME1R8	U-20ME1R8 U-18ME1R8	U-20ME1R8 U-18ME1R8	U-20ME1R8 U-18ME1R8	U-20ME1R8 U-20ME1R8		
Power supply		415V 3-phase/50Hz												415V 3-phase/50Hz																
Capacity	Cooling	kW	22.4	28.0	33.5	40.0	45.0	50.0	56.0	61.5	68.0	73.0	78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0	124.0	130.0	135.0	140.0	145.0	151.0	156.0	162.0	168.0	
	BTU/h	76,500	95,600	114,300	136,500	153,600	170,600	191,100	209,900	232,100	249,100	267,900	290,100	307,200	327,600	344,700	365,200	385,700	402,700	423,200	443,700	460,800	477,800	494,900	515,400	532,400	552,900	573,400		
EER / COP	Cooling	W/W	4.04	3.60	3.61	3.60	3.36	3.50	3.33	3.75	3.60	3.60	3.47	3.47	3.35	3.43	3.34	3.44	3.36	3.51	3.43	3.43	3.35	3.41	3.35	3.39	3.44	3.38	3.33	
	Heating	W/W	4.56	4.10	4.10	4.21	3.85	3.86	3.82	4.34	4.09	4.12	3.96	4.03	3.86	3.86	3.83	3.84	3.85	4.04	3.92	3.96	3.86	3.86	3.84	3.85	3.85	3.83	3.81	
Dimensions	H x W x D	mm	1,758 x 770 x 930	1,758 x 770 x 930	1,758 x 770 x 930	1,758 x 1,000 x 930	1,758 x 1,000 x 930	1,758 x 1,540 x 930	1,758 x 1,540 x 930	1,758 x 1,830 x 930	1,758 x 1,830 x 930	1,758 x 1,830 x 930	1,758 x 1,830 x 930	1,758 x 2,060 x 930	1,758 x 2,060 x 930	1,758 x 2,600 x 930	1,758 x 2,600 x 930	1,758 x 3,140 x 930	1,758 x 3,140 x 930	1,758 x 2,890 x 930	1,758 x 2,890 x 930	1,758 x 3,120 x 930	1,758 x 3,120 x 930	1,758 x 3,660 x 930	1,758 x 3,660 x 930	1,758 x 4,200 x 930	1,758 x 4,740 x 930	1,758 x 4,740 x 930	1,758 x 4,740 x 930	
Net weight	kg	234	234	281	309	309	421	421	543	543	590	590	618	618	730	730	842	842	899	899	927	927	1039	1039	1151	1263	1263	1263		
Electrical ratings (415V)	Cooling	Running current	A	8.2	11.8	14.1	16.5	19.9	22.0	25.8	24.3	28.3	30.5	33.9	36.5	40.0	42.4	45.8	47.8	51.7	50.3	54.2	56.4	60.0	61.9	65.3	67.7	69.8	73.6	77.5
		Power input	kW	5.54	7.78	9.29	11.1	13.4	14.3	16.8	16.4	18.9	20.3	22.6	24.5	26.9	28.0	30.2	31.1	33.6	33.6	36.2	37.9	40.3	41.1	43.3	44.5	45.4	47.9	50.4
	Heating	Running current	A	8.1	11.6	13.9	15.9	19.3	22.3	25.4	23.6	28	29.7	33.1	35.1	38.5	42.4	44.7	47.7	50.7	48.9	52.7	54.5	57.9	60.5	62.9	66.8	69.8	73	76.2
		Power input	kW	5.48	7.68	9.15	10.7	13.0	14.5	16.5	15.9	18.7	19.8	22.1	23.6	25.9	28.0	29.5	31.0	33.0	32.7	35.2	36.6	38.9	40.2	41.7	43.9	45.4	47.5	49.6
Starting current (415V)	A	1	1	85	80	85	96	103	88	96	101	105	101	105	116	123	124	128	121	125	121	125	136	143	144	146	149	153		
Air flow rate	L/s	2,450	2,550	3,167	3,533	3,533	4,067	4,717	5,967	6,083	6,700	6,700	7,067	7,067	7,600	8,250	8,800	9,450	10,233	10,233	10,600	10,600	11,133	11,783	12,317	12,850	13,500	14,150		
Refrigerant amount at shipment	kg	6.5	6.8	6.8	8.5	8.5	9.0	9.0	15.0	15.3	15.3	15.3	17.0	17.0	17.5	17.5	18.0	18.0	23.8	23.8	25.5	25.5	26.0	26.0	26.5	27.0	27.0	27.0		
External static pressure	Pa	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	
Piping connections	Gas pipe	mm	19.05	22.22	25.40	25.40	28.58	28.58	28.58	28.58	28.58	31.75	31.75	31.75	31.75	31.75	38.10	38.10	38.10	38.10	38.10	38.10	38.10	38.10	38.10	38.10	38.10	38.10	38.10	
	Liquid pipe	mm	9.52	9.52	12.70	12.70	12.70	15.88	15.88	15.88	15.88	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	
	Balance pipe	mm	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	
Ambient temperature operating range		Cooling: -10°C (DB)~ +46°C (DB). Heating: -25°C (WB)~ +20°C (WB)												Cooling: -10°C (DB)~ +46°C (DB). Heating: -25°C (WB)~ +20°C (WB)																
Sound pressure level	Normal mode	dB (A)	56.5	59.0	61.0	62.0	62.0	60.0	63.0	63.0	63.5	64.5	64.5	65.0	65.0	64.0	65.5	65.0	66.0	66.5	66.5	67.0	67.0	66.0	67.0	66.5	66.0	67.0	68.0	
	Silent mode	dB (A)	53.5	56.0	58.0	59.0	59.0	57.0	60.0	60.0	60.5	61.5	61.5	62.0	62.0	61.0	62.5	62.0	63.0	63.5	63.5	64.0	64.0	63.0	64.0	63.5	63.0	64.0	65.0	
Sound power level	Normal mode	dB	71.0	73.5	75.5	76.5	76.5	74.5	77.5	77.5	78.0	79.0	79.0	79.5	79.5	78.5	80.0	79.5	80.5	81.0	81.0	81.5	81.5	80.5	81.5	81.0	80.5	81.5	82.5	

22.4-33.5 kW

- A 894 (installation hole pitch). The tubing is routed out from the front
- B 730 (installation hole pitch). The tubing is routed out from the front
- C 730 (installation hole pitch).

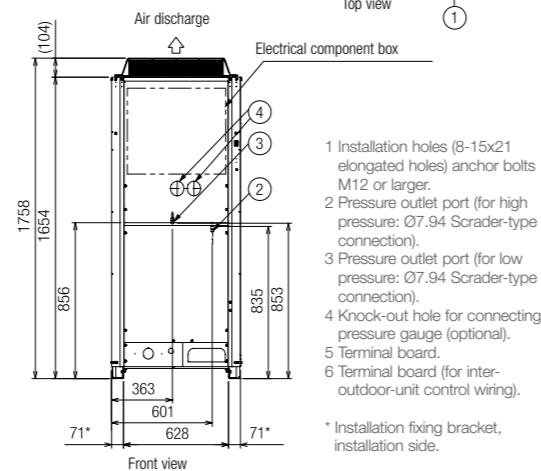



- Installation holes (8-15x21 elongated holes) anchor bolts M12 or larger.
- Pressure outlet port (for high pressure: Ø7.94 Scradler-type connection).
- Pressure outlet port (for low pressure: Ø7.94 Scradler-type connection).
- Knock-out hole for connecting pressure gauge (optional).
- Terminal board.
- Terminal board (for inter-outdoor-unit control wiring).

* Installation fixing bracket, installation side.

40.0-45.0 kW

- A 894 (installation hole pitch). The tubing is routed out from the front
- B 730 (installation hole pitch). The tubing is routed out from the front
- C 730 (installation hole pitch).

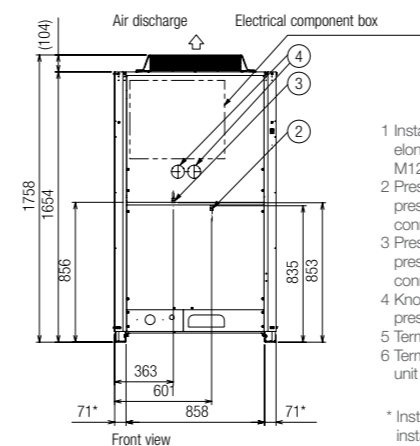



- Installation holes (8-15x21 elongated holes) anchor bolts M12 or larger.
- Pressure outlet port (for high pressure: Ø7.94 Scradler-type connection).
- Pressure outlet port (for low pressure: Ø7.94 Scradler-type connection).
- Knock-out hole for connecting pressure gauge (optional).
- Terminal board.
- Terminal board (for inter-outdoor-unit control wiring).

* Installation fixing bracket, installation side.

50.0-56.0 kW

- A 894 (installation hole pitch). The tubing is routed out from the front
- B 730 (installation hole pitch). The tubing is routed out from the front
- C 730 (installation hole pitch).

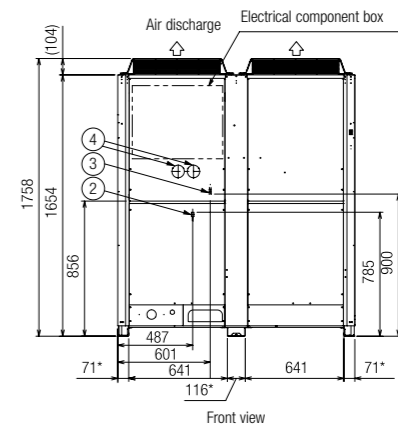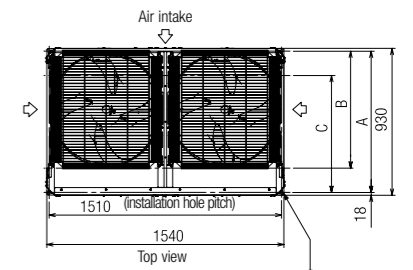

- Installation holes (8-15x21 elongated holes) anchor bolts M12 or larger.
- Pressure outlet port (for high pressure: Ø7.94 Scradler-type connection).
- Pressure outlet port (for low pressure: Ø7.94 Scradler-type connection).
- Knock-out hole for connecting pressure gauge (optional).
- Terminal board.
- Terminal board (for inter-outdoor-unit control wiring).

* Installation fixing bracket, installation side.

2-WAY FSV ME1 Series HIGH COP SETTING MODEL

Appearance																								
kW	28.0	33.5	40.0	45.0	50.0	56.0	61.5	68.0		73.0	78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0	124.0	130.0	135.0			
Model name	U-14ME1R8	U-16ME1R8	U-18ME1R8	U-20ME1R8	U-14ME1R8 U-8ME1R8	U-16ME1R8 U-8ME1R8	U-18ME1R8 U-8ME1R8	U-16ME1R8 U-16ME1R8		U-18ME1R8 U-16ME1R8	U-20ME1R8 U-16ME1R8	U-20ME1R8 U-18ME1R8	U-20ME1R8 U-20ME1R8	U-18ME1R8 U-16ME1R8 U-8ME1R8	U-16ME1R8 U-16ME1R8 U-16ME1R8	U-18ME1R8 U-16ME1R8 U-16ME1R8	U-20ME1R8 U-16ME1R8 U-16ME1R8	U-20ME1R8 U-18ME1R8 U-16ME1R8	U-20ME1R8 U-18ME1R8 U-18ME1R8	U-20ME1R8 U-20ME1R8 U-18ME1R8	U-20ME1R8 U-20ME1R8			
Power supply	415V 3-phase/50Hz										415V 3-phase/50Hz													
Capacity	Cooling	kW	28.0	33.5	40.0	45.0	50.0	56.0	61.5	68.0		73.0	78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0	124.0	130.0	135.0	
		BTU/h	95,600	114,300	136,500	153,600	170,600	191,100	209,900	232,100		249,100	267,900	290,100	307,200	327,600	344,700	365,200	385,700	402,700	423,200	443,700	460,800	
EER / COP	Cooling	W/W	4.06	4.07	4.01	3.88	4.07	4.06	3.97	4.07		4.01	3.96	3.94	3.88	4.09	4.07	4.08	4.04	3.96	3.97	3.92	3.88	
		Heating	W/W	4.45	4.45	4.41	4.39	4.52	4.50	4.39	4.45		4.38	4.42	4.40	4.41	4.54	4.45	4.44	4.47	4.40	4.42	4.41	4.40
Dimensions	H x W x D	mm	1,758 x 1,000 x 930	1,758 x 1,000 x 930	1,758 x 1,540 x 930	1,758 x 1,540 x 930	1,758 x 1,830 x 930	1,758 x 1,830 x 930	1,758 x 2,370 x 930	1,758 x 2,060 x 930		1,780 x 2,600 x 930	1,758 x 2,600 x 930	1,758 x 3,140 x 930	1,758 x 3,140 x 930	1,758 x 3,430 x 930	1,758 x 3,120 x 930	1,758 x 3,660 x 930	1,758 x 3,660 x 930	1,758 x 4,200 x 930	1,758 x 4,740 x 930	1,758 x 4,740 x 930	1,758 x 4,740 x 930	
Net weight		kg	309	309	421	421	543	543	655	618		730	730	842	842	964	927	1039	1039	1151	1263	1263	1263	
Electrical ratings (415V)	Cooling	Running current	A	10.3	12.2	14.9	17.3	18.2	20.5	23.0	24.8		27.1	29.5	32.2	34.6	34.9	36.9	39.0	41.7	44.4	46.5	49.5	51.9
		Power input	kW	6.90	8.23	9.98	11.6	12.3	13.8	15.5	16.7		18.2	19.8	21.6	23.2	23.5	24.8	26.2	28.0	29.8	31.2	33.2	34.8
	Heating	Running current	A	10.5	12.5	15.2	17.0	18.4	20.8	23.3	26.5		27.7	29.5	32.2	33.8	35.4	37.8	39.9	42.3	44.7	46.5	49.1	50.8
		Power input	kW	7.08	8.43	10.2	11.4	12.4	14.0	15.7	17.2		18.6	19.8	21.6	22.7	23.8	25.4	26.8	28.4	30.0	31.2	32.9	34.1
Starting current (415V)	A	80	85	95	101	88	93	103	98		108	114	116	118	116	110	120	126	129	131	133	136		
Air flow rate	L/s	3,533	3,533	4,067	4,717	5,983	5,983	6,517	7,067		7,600	8,250	8,783	9,433	10,050	10,600	11,133	11,783	12,317	12,850	13,500	14,150		
External static pressure	Pa	80	80	80	80	80	80	80	80		80	80	80	80	80	80	80	80	80	80	80	80	80	
Refrigerant amount at shipment	kg	8.5	8.5	9.0	9.0	15.0	15.0	15.5	17.0		17.5	17.5	18.0	18.0	24.0	25.5	26.0	26.0	26.5	27.0	27.0	27.0		
Piping connections	Gas pipe	mm	22.22	25.40	25.40	28.58	28.58	28.58	28.58		31.75	31.75	31.75	31.75	31.75	38.10	38.10	38.10	38.10	38.10	38.10	38.10	38.10	
	Liquid pipe	mm	9.52	12.70	12.70	12.70	15.88	15.88	15.88	15.88		19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	
	Balance pipe	mm	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35		6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	
Ambient temperature operating range			Cooling: -10°C (DB)~ +43°C (DB). Heating: -25°C (WB)~ +20°C (WB)										Cooling: -10°C (DB)~ +43°C (DB). Heating: -25°C (WB)~ +20°C (WB)											
Sound pressure level	Normal mode	dBA	62.0	62.0	60.0	63.0	63.0	63.0	61.5	65.0		64.0	65.5	65.0	66.0	64.5	66.5	66.0	67.0	66.5	66.0	67.0	67.5	
	Silent mode	dBA	59.0	59.0	57.0	60.0	60.0	60.0	58.5	62.0		61.0	62.5	62.0	63.0	61.5	63.5	63.0	64.0	63.5	63.0	64.0	64.5	
Sound power level	Normal mode	dB	76.5	76.5	74.5	77.5	77.5	77.5	76.0	79.5		78.5	80.0	79.5	80.5	79.0	81.0	80.5	81.5	81.0	80.5	81.5	82.0	

28.0-33.5 kW HIGH COP SETTING

- 1 Installation anchoring hole (4-15x21 elongated hole) Anchor bolt: M12 more
- 2 Refrigerant piping port (front / knockout hole)
- 3 Electric wiring port (front / Ø60, Ø28 knockout hole conduit connection)
- 4 Mounting hole for manifold gauge (high-pressure outlet port / Ø7.94 dia connector)
- 5 Mounting hole for manifold gauge (low-pressure outlet port / Ø7.94 dia connector)
- 6 Knockout hole to fix manifold gauge (field supply)

Distribution joint kit


For indoor units

- CZ-P160BK2 (Capacity after distribution: 22.4 kW or lower)
- CZ-P680BK2 (Capacity after distribution: Over 22.4 kW to 68.0 kW)
- CZ-P1350BK2 (Capacity after distribution: Over 68.0 kW to 135.0 kW)

For outdoor units

- CZ-P680PJ2 (Capacity after distribution: 68.0 kW or lower)
- CZ-P1350PJ2 (Capacity after distribution: Over 68.0 kW to 135.0 kW)

*Installation surface

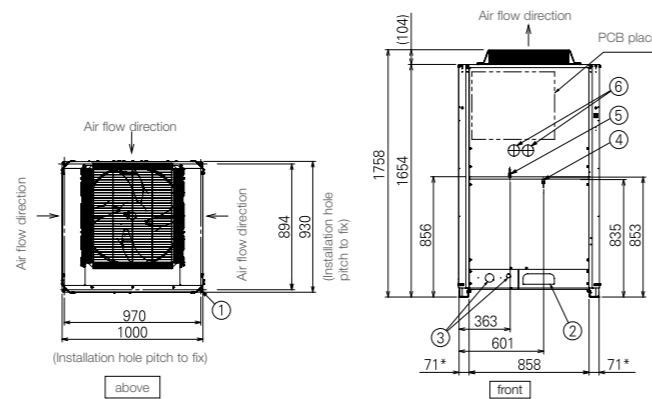

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB	7°C DB / 6°C WB

These specifications subject to change without notice.

40.0-45.0 kW HIGH COP SETTING

- 1 Installation anchoring hole (4-15x21 elongated hole) Anchor bolt: M12 more
- 2 Refrigerant piping port (front / knockout hole)
- 3 Electric wiring port (front / Ø60, Ø28 knockout hole conduit connection)
- 4 Mounting hole for manifold gauge (high-pressure outlet port / Ø7.94 dia connector)
- 5 Mounting hole for manifold gauge (low-pressure outlet port / Ø7.94 dia connector)
- 6 Knockout hole to fix manifold gauge (field supply)

Distribution joint kit


For indoor units

- CZ-P160BK2 (Capacity after distribution: 22.4 kW or lower)
- CZ-P680BK2 (Capacity after distribution: Over 22.4 kW to 68.0 kW)
- CZ-P1350BK2 (Capacity after distribution: Over 68.0 kW to 135.0 kW)

For outdoor units

- CZ-P680PJ2 (Capacity after distribution: 68.0 kW or lower)
- CZ-P1350PJ2 (Capacity after distribution: Over 68.0 kW to 135.0 kW)

*Installation surface

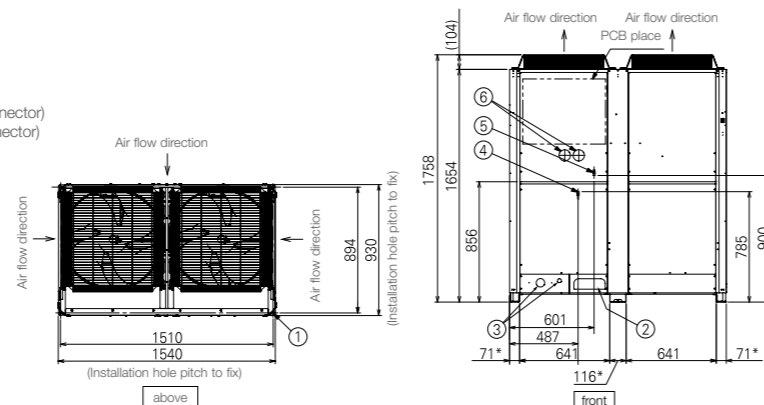

22.4 kW As part of 50, 56, 61.5, 96 kW Systems

- 1 Installation anchoring hole (4-15x21 elongated hole) Anchor bolt: M12 more
- 2 Refrigerant piping port (front / knockout hole)
- 3 Electric wiring port (front / Ø60, Ø28 knockout hole conduit connection)
- 4 Mounting hole for manifold gauge (high-pressure outlet port / Ø7.94 dia connector)
- 5 Mounting hole for manifold gauge (low-pressure outlet port / Ø7.94 dia connector)
- 6 Knockout hole to fix manifold gauge (field supply)

Distribution joint kit


For indoor units

- CZ-P160BK2 (Capacity after distribution: 22.4 kW or lower)
- CZ-P680BK2 (Capacity after distribution: Over 22.4 kW to 68.0 kW)
- CZ-P1350BK2 (Capacity after distribution: Over 68.0 kW to 135.0 kW)

For outdoor units


- CZ-P680PJ2 (Capacity after distribution: 68.0 kW or lower)
- CZ-P1350PJ2 (Capacity after distribution: Over 68.0 kW to 135.0 kW)

*Installation surface

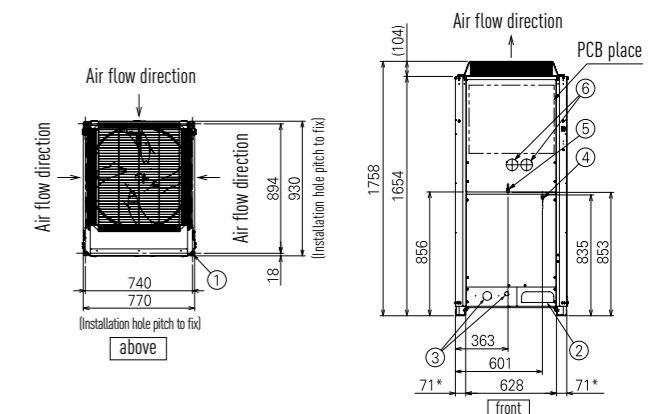

Piping Design

Select installation locations so that the lengths and sizes of refrigerant piping are within the allowable ranges shown in the figure below.

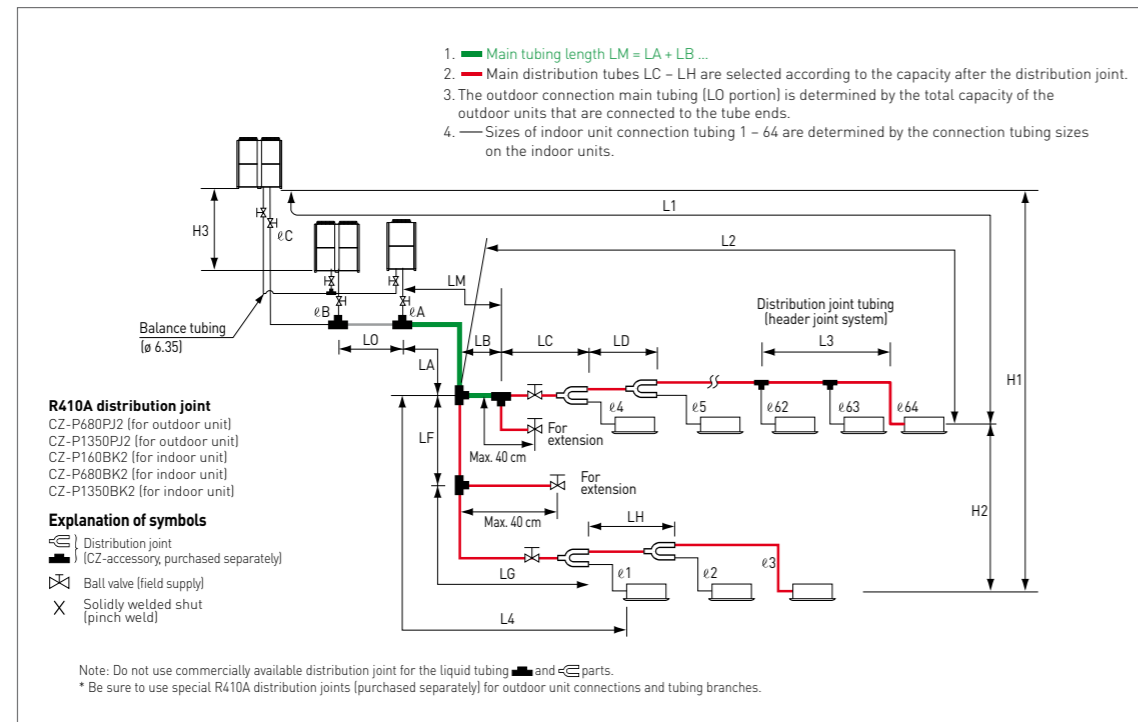

Ranges that apply to refrigerant piping lengths and to differences in installation heights

Items	Mark	Contents	Length (m)
Allowable tubing length	L1	Max. tubing length	Actual length ≤180 Equivalent length ≤200
	$\Delta L (L2_L4)$	Difference between max. length and min. length from the No.1 distribution joint	≤50*5
	LM	Max. length of main tubing (at max. diameter)	<180*3
	ℓ1, ℓ2... ℓ64	Max. length of each distribution tube	≤30
	L1+ ℓ1+ ℓ2... ℓ63+ ℓA+ ℓB+LF+LG+LH	Total max. tubing length including length of each distribution tube (only liquid tubing)	≤1000
	ℓA, ℓB+LO, ℓC+LO	Maximum tubing length from outdoor's 1st distribution joint to each outdoor unit	≤10
Allowable elevation difference	H1	When outdoor unit is installed higher than indoor unit	≤50
		When outdoor unit is installed lower than indoor unit	≤40
	H2	Max. difference between indoor units	≤15*6
	H3	Max. difference between outdoor units	≤4
Allowable length of joint tubing	L3	Distribution joint tubing ; Max. tubing length between the first distribution joint and solidly welded-shut end point	≤2

L = Length, H = Height

NOTE

- The outdoor connection main tubing (LO portion) is determined by the total capacity of the outdoor units that are connected to the tube ends.
- If the longest tubing length (L1) exceeds 90 m (equivalent length), increase the sizes of the main tubes (LM) by 1 rank for gas tubes and liquid tubes. (Use a field supply reducer.) (Select the tube size from the table of main tube sizes on the following page (LA table), and from the table of refrigerant piping sizes on the bottom-right of this page.)
- If the longest main tube length (LM) exceeds 50 m, increase the main tube size at the portion before 50 m by 1 rank for the gas tubes. (Use a field supply reducer.) Determine the length less than the limitation of allowable maximum tubing length. (For the portion that exceeds 50 m, set based on the main tube sizes (LA) listed in the table on the following page.)
- If the size of the existing tubing is already larger than the standard tubing size, it is not necessary to further increase the size.
 * If the existing tubing is used, and the amount of on-site refrigerant charge exceeds the value listed below, then change the size of the tubing to reduce the amount of refrigerant.
 Total amount of refrigerant for the system with 1 outdoor unit: 50 kg
 Total amount of refrigerant for the system with 2 outdoor units: 80 kg
 Total amount of refrigerant for the system with 3 outdoor units: 100 kg
- When the tubing length exceeds 40m, increase a longer liquid or gas tubing by 1 rank.
- If the tubing length exceeds 500m, the formula is $15 \times (2 - \text{all tubing length}/500)$. Determine the length less than the limitation of allowable maximum tubing length.

Necessary amount of additional refrigerant charge per outdoor unit

U-8ME1R8	U-10ME1R8	U-12ME1R8	U-14ME1R8	U-16ME1R8	U-18ME1R8	U-20ME1R8
5.9 kg	6.6 kg	6.6 kg	7.8 kg	7.8 kg	8.5 kg	8.5 kg

System limitations

Max. No. allowable connected outdoor units	3*2
Max. capacity allowable connected outdoor units	168 kW
Max. connectable indoor units	64*1
Max. allowable indoor/outdoor capacity ratio	50-200 %*3

- *1: In the case of 68.0 kW or smaller units, the number is limited by the total capacity of the connected indoor units.
 *2: Up to 3 units can be connected if the system has been extended.
 *3: It is strongly recommended that you choose the unit so the load can become between 50 and 130 %.

Additional refrigerant charge

Liquid tubing size mm (inches)	Amount of refrigerant charge/m (g/m)
ø6.35 (ø1/4)	26
ø9.52 (ø3/8)	56
ø12.7 (ø1/2)	128
ø15.88 (ø5/8)	185
ø19.05 (ø3/4)	259
ø22.22 (ø7/8)	366
ø25.4 (ø1)	490

Refrigerant piping (Existing piping can be used.)

Tubing size mm (inches)		Material 1/2H • H	
ø6.35 (ø1/4)	t 0.8 mm	ø22.22 (ø7/8)	t 1.0 mm
ø9.52 (ø3/8)	t 0.8 mm	ø25.4 (ø1)	t 1.0 mm
ø12.7 (ø1/2)	t 0.8 mm	ø28.58 (ø1-1/8)	t 1.0 mm
ø15.88 (ø5/8)	t 1.0 mm	ø31.75 (ø1-1/4)	t 1.0 mm
ø19.05 (ø3/4)	t 1.2 mm	ø38.1 (ø1-1/2)	over t 1.35 mm
		ø41.28 (ø1-5/8)	over t 1.45 mm



Refrigerant Branch Pipes (optional accessories) for 2-WAY ME1 Series

Optional Distribution Joint Kits


See the installation instructions packaged with the distribution joint kit for the installation procedure.

Model name	Cooling capacity after distribution	Remarks
1. CZ-P680PJ2	68.0 kW or less	For outdoor unit
2. CZ-P1350PJ2	168.0 kW or less	For outdoor unit
3. CZ-P160BK2	22.4 kW or less	For indoor unit
4. CZ-P680BK2	68.0 kW or less	For indoor unit
5. CZ-P1350BK2	168.0 kW or less	For indoor unit

Tubing size (with thermal insulation)

1. CZ-P680PJ2


For outdoor unit (Capacity after distribution joint is 68.0 kW or less.)

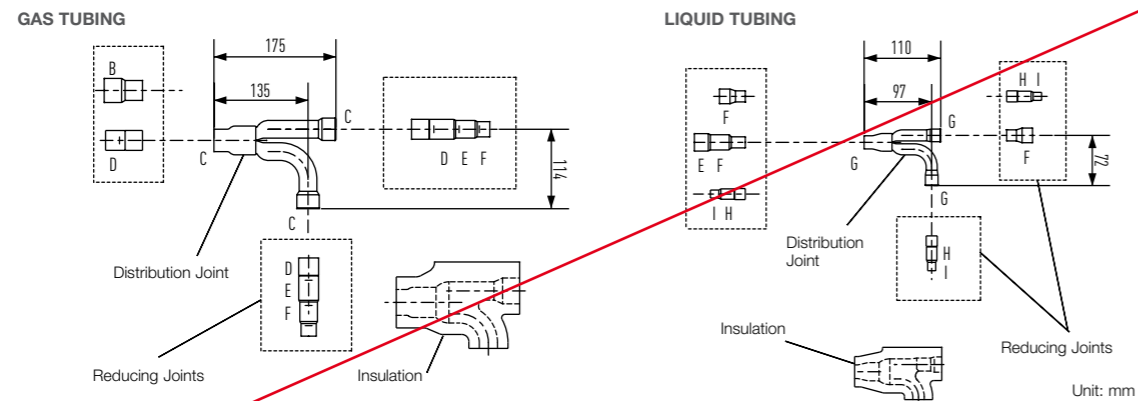

Size of connection point on each part (Shown are inside diameters of tubing)									
Size	Part A	Part B	Part C	Part D	Part E	Part F	Part G	Part H	Part I
Dimension (mm)	Ø38.10	Ø31.75	Ø28.58	Ø25.40	Ø22.22	Ø19.05	Ø15.88	Ø12.70	Ø9.52
Dimension (inches)	Ø1-1/2	Ø1-1/4	Ø1-1/8	Ø1	Ø7/8	Ø3/4	Ø5/8	Ø1/2	Ø3/8

2. CZ-P1350PJ2


For outdoor unit (Capacity after distribution joint is greater than 68.0 kW and no more than 168.0 kW.)

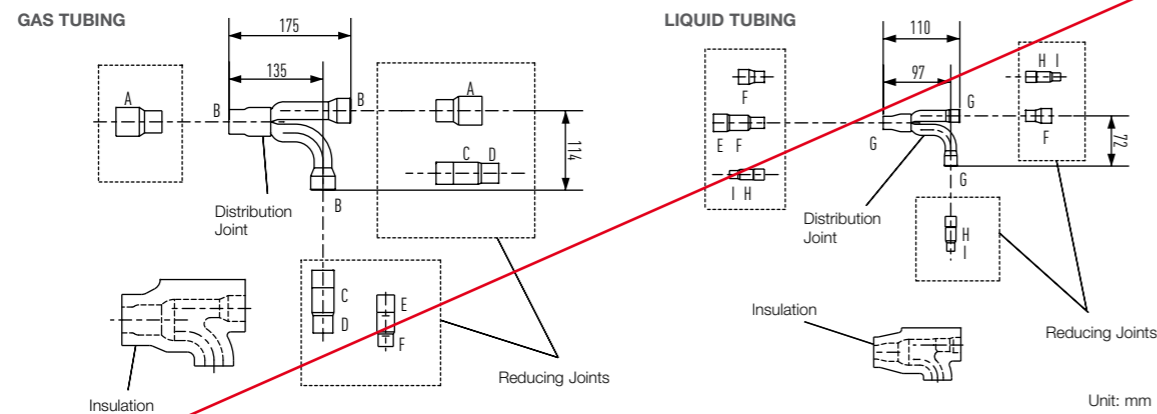

Size of connection point on each part (Shown are inside diameters of tubing)									
Size	Part A	Part B	Part C	Part D	Part E	Part F	Part G	Part H	Part I
Dimension (mm)	Ø38.10	Ø31.75	Ø28.58	Ø25.40	Ø22.22	Ø19.05	Ø15.88	Ø12.70	Ø9.52
Dimension (inches)	Ø1-1/2	Ø1-1/4	Ø1-1/8	Ø1	Ø7/8	Ø3/4	Ø5/8	Ø1/2	Ø3/8

3. CZ-P160BK2


Use: For indoor unit (Capacity after distribution joint is 22.4 kW or less.)

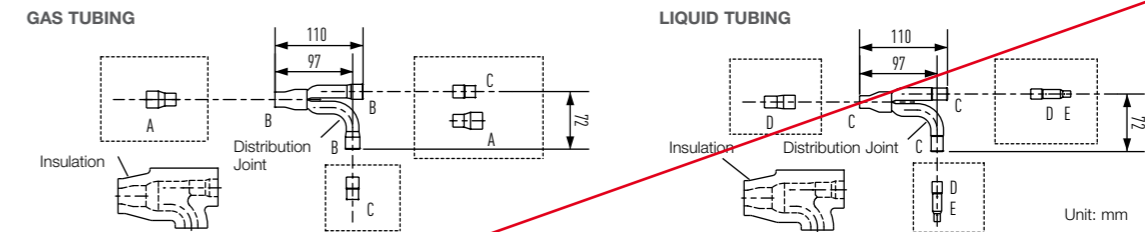

Size of connection point on each part (Shown are inside diameters of tubing)					
Size	Part A	Part B	Part C	Part D	Part E
Dimension (mm)	Ø19.05	Ø15.88	Ø12.70	Ø9.52	Ø6.35
Dimension (inches)	Ø3/4	Ø5/8	Ø1/2	Ø3/8	Ø1/4

4. CZ-P680BK2


Use: For indoor unit (Capacity after distribution joint is greater than 22.4 kW and no more than 68.0 kW.)

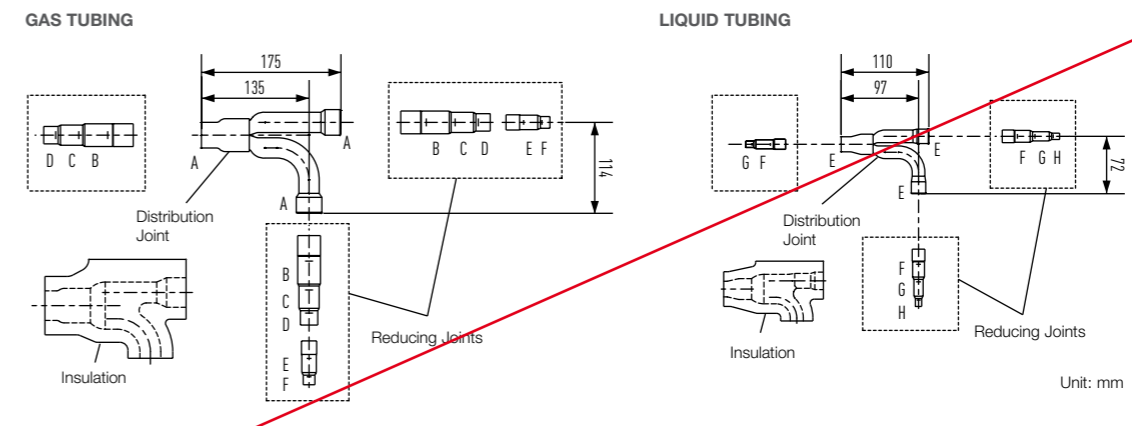

Size of connection point on each part (Shown are inside diameters of tubing)								
Size	Part A	Part B	Part C	Part D	Part E	Part F	Part G	Part H
Dimension (mm)	Ø28.58	Ø25.40	Ø22.22	Ø19.05	Ø15.88	Ø12.70	Ø9.52	Ø6.35
Dimension (inches)	Ø1-1/8	Ø1	Ø7/8	Ø3/4	Ø5/8	Ø1/2	Ø3/8	Ø1/4

5. CZ-P1350BK2

Use: For indoor unit (Capacity after distribution joint is greater than 68.0 kW and no more than 168.0 kW.)

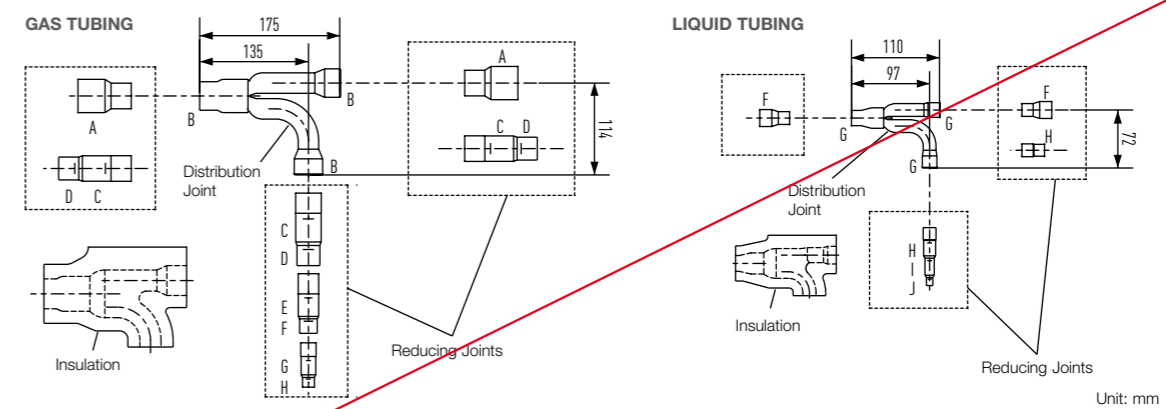

Size of connection point on each part (Shown are inside diameters of tubing)										
Size	Part A	Part B	Part C	Part D	Part E	Part F	Part G	Part H	Part I	Part J
Dimension (mm)	Ø38.10	Ø31.75	Ø28.58	Ø25.40	Ø22.22	Ø19.05	Ø15.88	Ø12.70	Ø9.52	Ø6.35
Dimension (inches)	Ø1-1/2	Ø1-1/4	Ø1-1/8	Ø1	Ø7/8	Ø3/4	Ø5/8	Ø1/2	Ø3/8	Ø1/4

INVERTER

For small-scale commercial and residential use

2-WAY mini-FSV LE1 Series

COOLING OR HEATING TYPE 1 PHASE
COOLING OR HEATING TYPE 3-PHASE

Panasonic 2-WAY mini FSV, is a 2-pipe heat pump specifically designed for the most demanding applications. Mini FSV is available in 3 sizes with cooling / heating capacities ranging from 12.1 kW to 15.5 kW with up to 9 indoor units connectable (applicable for 15.5 kW).



- Top-class EER:4.30 / COP:4.62 (In the case of 12.1 kW)
- Cooling operation is possible when outdoor temperature is as high as 46°C DB
- Maximum number of connectable indoor units : 12.1 kW:6, 14.0 kW:8, 15.5 kW:9
- Diversity ratio 50-130%
- DC inverter technology combined with R410A for excellent efficiency
- Actual piping length:120m (Total piping length:150m)
- System difference of elevation:50m /40m (outdoor above/below)
- Demand response ready (Peak cut)
- Difference in elevation between indoor units:15m
- Cooling operation is possible when outdoor temperature as low as -10°C DB
- Heating operation is possible when outdoor temperature as low as -20°C WB
- Compact outdoor unit 1,330 x 940 x 340 mm
- One ampere starting current
- Full range of indoor units and control options
- Auto restart from outdoor unit



Energy-saving concept.

The use of energy saving designs for the structure of fans, fan motors, compressors and heat exchangers results in high COP values which rank among the top class in the industry. In addition, use of highly efficient R410A refrigerant reduces CO₂ emissions and lowers operating costs.



1 Panasonic Inverter Compressor

A large-capacity inverter compressor has been adopted. The inverter compressor is superior in performance with improved partial-load capacity.

2 Printed Circuit Board

The number of PCB was reduced from 3 into 2 pieces making maintenance easier.

3 Accumulator

A large accumulator has been adopted to maintain compressor reliability because of the increased refrigerant quantity, which allows an extended max piping length. Furthermore, refrigerant pressure loss is reduced, which contributes to an improved operating efficiency.

4 DC Fan Motor

Checking load and outside temperature, the DC motor is controlled for optimum air volume.

5 Newly designed fan

The newly designed fan blades have been developed to inhibit air turbulence and to increase efficiency. As fan diameter has been increased to 490mm, the air volume has been increased by 12% whilst maintaining a low sound level.

6 Heat Exchanger & Copper Tubes

The heat exchanger size and the copper tube sizes in the heat exchanger have been redesigned to increase efficiency.

7 Oil Separator


A new centrifugal separator has been adopted to improve oil separation efficiency and reduce refrigerant pressure loss.

2-WAY mini-FSV LE1 Series

System example

An expansion from Panasonic VRF line up, the mini FSV is compatible with the same indoor units and controls as the rest of the FSV range.

12.1-15.5 kW

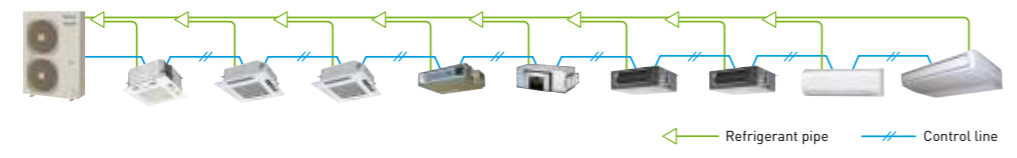


SYSTEM / HP	12.1 KW	14.0 KW	15.5 KW
Connectable Indoor Unit	6	8	9

Wide operating range

- Cooling operation is possible when outdoor temperature as low as -10°C DB
 - Cooling operation is possible when outdoor temperature as high as 46°C DB
 - Heating operation is possible when outdoor temperature as low as -20°C WB
- The remote controller temperature can be set from 16°C up to 30°C*.

4 - 6 HP

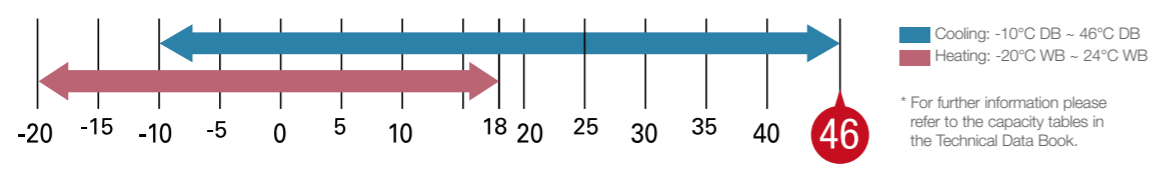


* Depending on the type of remote controller.


Improved energy savings

The operation efficiency has been improved using highly efficient R410A refrigerant, new DC Inverter compressor, new DC motor and a new heat exchanger design.

Cooling

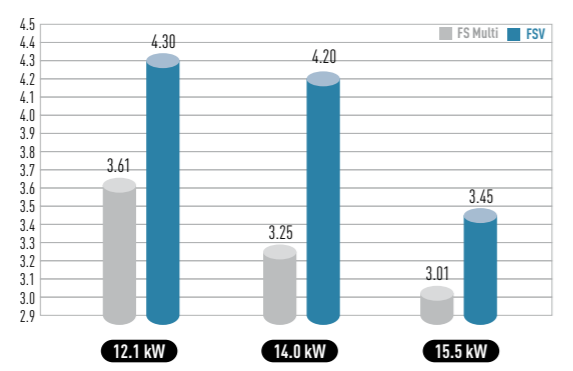


Heating

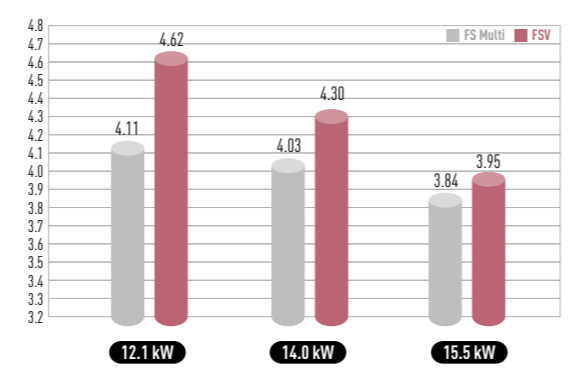

Demand response compliant

Featuring inverter control technology, all Panasonic FSV systems are Demand Response Management (DRM) ready. With this control, power consumption at times of peak load can be set in three steps to deliver optimum performance. This feature is fully compliant with both AS4755 and AS3823, which are due to be implemented shortly.

Demand control terminal is available to control 0-50-75-100% of capacities.

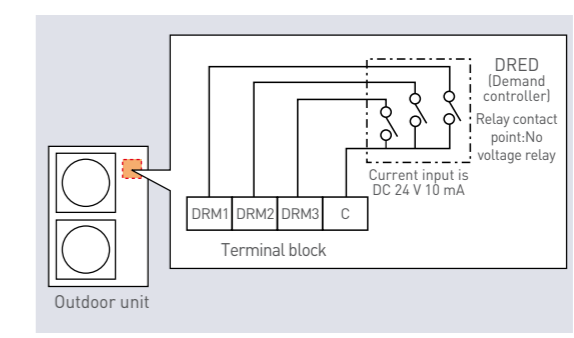


Demand Response Signal	Power Input
DRM 1	0%
DRM 2	50%
DRM 3	75%

Flexible Demand Response with the CZ-CAPDC2*1

Setting is possible as 0% or in the range from 40 to 100% (in steps of 5%). At the time of shipping, setting has been done to the three steps of 0%, 70% and 100%.

*1 An outdoor Seri-Para I/O unit (CZ-CAPDC2) is required for demand input signal.

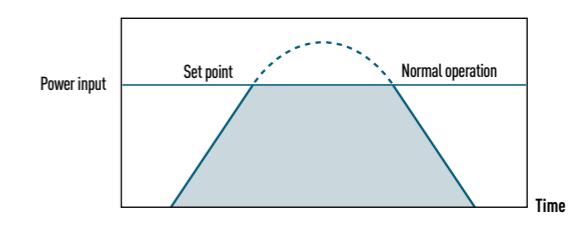


	Power input	
Level 1	100% (Preset)	Possible to change 40-100%
Level 2	70% (Preset)	
Level 3	0% (Always in stop condition)	

Distribution Joint Kits

CZ-P160BK2

Use: For indoor unit (Capacity after distribution joint is 22.4kW or less.)

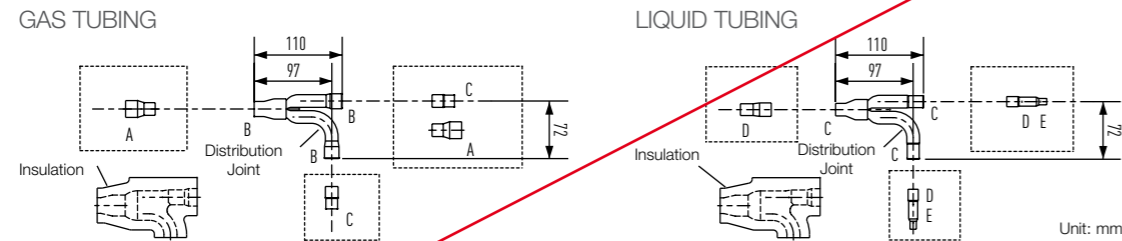

Size of connection point on each part (Shown are inside diameters of tubing)					
Size	Part A	Part B	Part C	Part D	Part E
Dimension (mm)	Ø19.05	Ø15.88	Ø12.70	Ø9.52	Ø6.35
Dimension (inches)	Ø3/4	Ø5/8	Ø1/2	Ø3/8	Ø1/4

Wiring System Diagrams


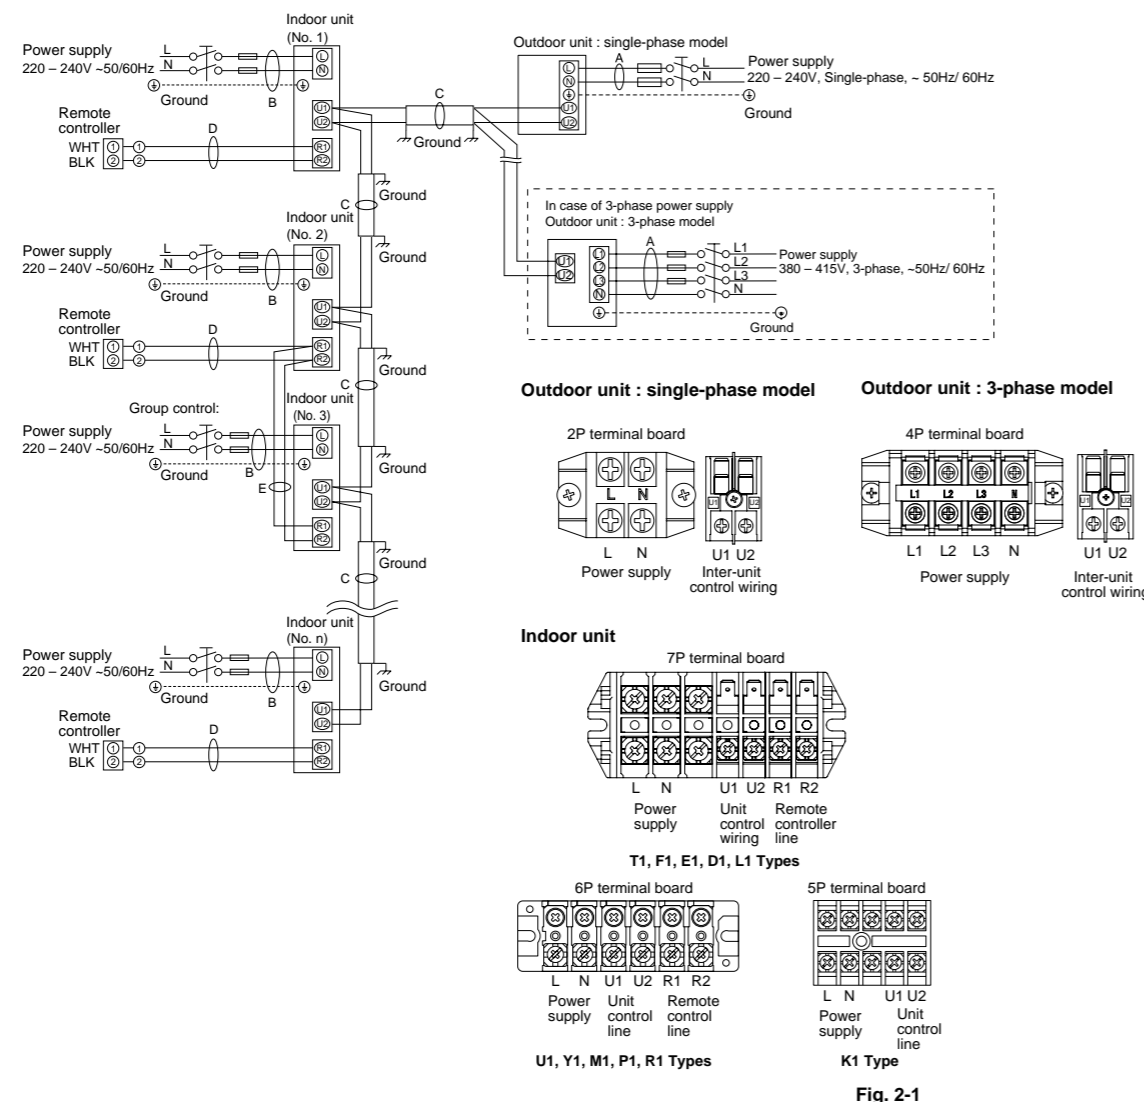


Fig. 2-1

Piping design

Select the installation location so that the length and size of refrigerant piping are within the allowable range shown in the figure below.

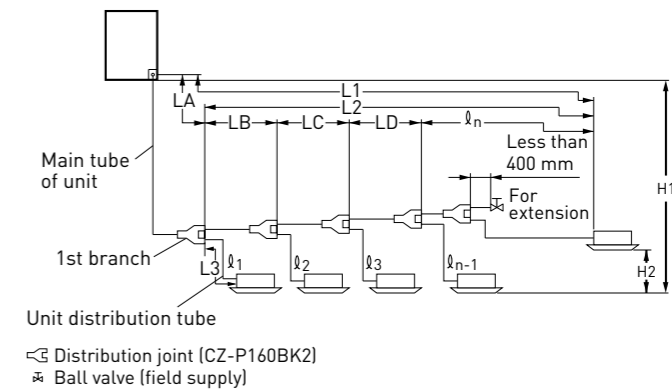

Ranges that Apply to Refrigerant Piping Lengths and to Differences in Installation Heights

Items	Marks	Contents	Length (m)
Allowable tubing length	L1	Max. tubing length	Actual length: 120 Equivalent length: 140
	$\Delta L (L2 - L3)$	Difference between max. length and min. length from the No.1 distribution joint	40
	$l1, l2... ln$	Max. length of each distribution tube	30
	$l1, l2... ln-1+L1$	Total max. tubing length including length of each distribution tube (only narrow tubing)	150
Allowable elevation difference	H1	When outdoor unit is installed higher than indoor unit	50
		When outdoor unit is installed lower than indoor unit	40
	H2	Max. difference between indoor units	15

L = Length, H = Height

Tubing Size

Main Tubing Size (LA)

	12.1 kW	14.0 kW	15.5 kW
System kilowatts	12.1	14.0	15.5
Gas tubing mm (inches)	Ø15.88 (Ø5/8)		Ø19.05 (Ø3/4)
Liquid tubing mm (inches)	Ø9.52 (Ø3/8)		

Note :If the system consists of only one indoor unit with an outdoor 6HP, the main tube of the unit (LA) should be Ø19.05. Convert Ø19.05 to Ø15.88 using a reducer (field supply) close to the indoor unit and then make the connection.

Main Tubing Size After Distribution (LB, LC...)

Total capacity after distribution	Below kW	Over kW			
		7.1	12.1	14.0	15.5
Tubing size	Gas tubing	(mm)	Ø12.7	Ø15.88	Ø19.05
		(inches)	Ø1/2	Ø5/8	Ø3/4
	Liquid tubing	(mm)	Ø9.52		
		(inches)	Ø3/8		

kW = kilowatts

Note :In case the total capacity of connected indoor units exceeds the total capacity of the outdoor units, select the main tubing size for the total capacity of the outdoor units.

Indoor Unit Tubing Connection (l1, l2...ln-1)

Indoor unite type	22	28	36	45	56	73	90	106	140	160
Gas tubing mm (inches)	Ø12.7 (Ø1/2)					Ø15.88 (Ø5/8)				
Liquid tubing mm (inches)	Ø6.35 (Ø1/4)					Ø9.52 (Ø3/8)				

System Limitations

Outdoor units	12.1 kW	14.0 kW	15.5 kW
Number of max. connectable indoor units	6	8	9
Max. allowable indoor/outdoor capacity ratio	50 - 130%		

kW = kilowatts



Simultaneous heating and cooling VRF system

NEW

3-WAY FSV MF2 Series

Heat Recovery Type



New 3-WAY FSV MF2 series enables simultaneous heating and cooling operation



Heating

* Office building with diverse room temperatures due to the different amount of sunshine received.
 * The rooms with computer equipment requiring year-round cooling.

Cooling

Fully-automatic simultaneous cooling/heating operation and heat recovery

3-WAY MF2 series enables simultaneous heating and cooling operation by each solenoid valve kit.



CZ-P56HR3
Up to 5.6 kW



CZ-P160HR3
From 5.7 to 16 kW

3-Pipe control PCB CZ-CAPE2*
Must be added to the CZ-P56HR3 OR CZ-P160HR3.


New design to decrease noise at low capacity load.

*For S-45MK1E5/S-56MK1E5/S-73MK1E5/S-106MK1E5:CZ-CAPEK2.

Individual control of multiple indoor units with solenoid valve kits

- Any design and layout can be used in a single system.
- Cooling operation is possible up to an outdoor temperature of -10°C DB.

System example

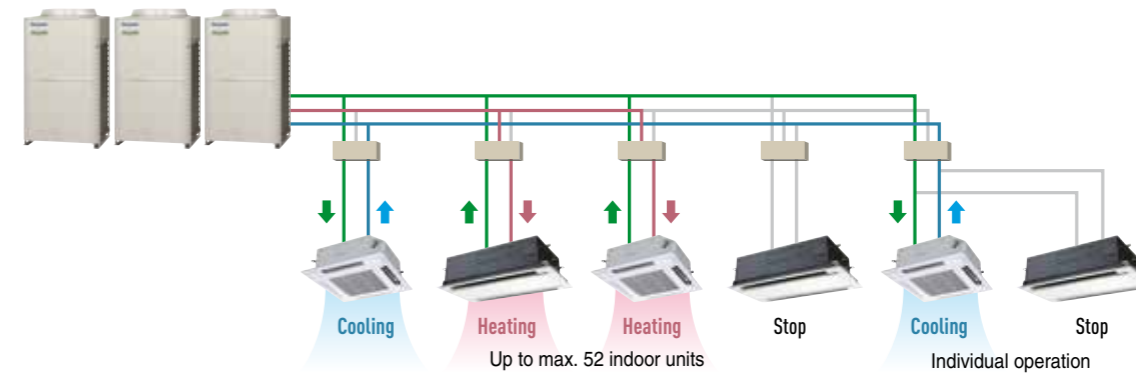

— Liquid pipe
 medium-temperature, medium-pressure liquid pipe

— Discharge pipe
 high-temperature, high-pressure gas pipe

— Suction pipe
 low-temperature, low-pressure gas pipe

* When individually controlled with one solenoid valve kit, address setting is required on site.

Simultaneous heating and cooling VRF system 3-WAY FSV MF2 Series

Increased max. number of connectable indoor units


The 3-WAY MF2 series has four DC inverter outdoor units from 22.4 kW to 40 kW as the basic models, and by combination of up to three units, an air-conditioning capacity of 22.4 kW to 118 kW can be set according to the user needs.

System (kW)	22.4	28.0	33.5	40.0	45.0	50.0	56.0	61.5	68.0	73.0	78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0
Outdoor units	22.4	28.0	33.5	40.0	22.4	28.0	33.5	40.0	40.0	40.0	40.0	22.4	22.4	22.4	28.0	33.5	33.5	40.0
Max Connectable indoor units	13	16	19	23	26	29	33	36	40	43	46	50	52	52	52	52	52	52

Connectable indoor/outdoor unit capacity ratio up to 150%


Long piping design

Adaptable to various building types and sizes
Actual piping length : 180m
Max piping length : 500m

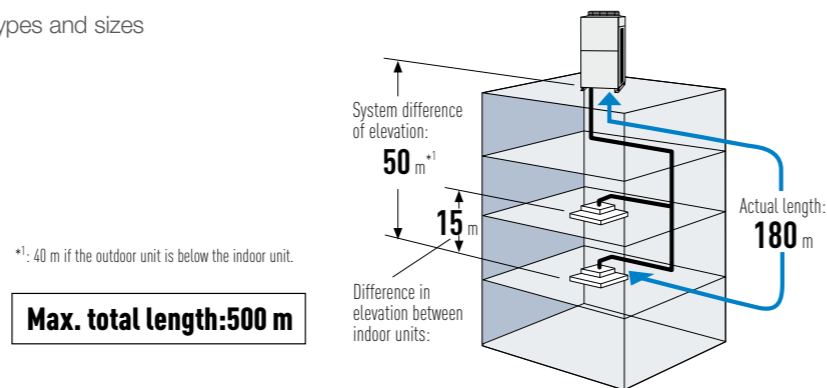


Excellent energy savings

The operation efficiency has been improved using highly efficient R410A refrigerant, new DC inverter compressor, new DC motor and new fan guard with low-loss wire guard. In addition, the heat exchanger has been redesigned from 3-direction suction to 4-direction suction to efficiently distribute air speed.

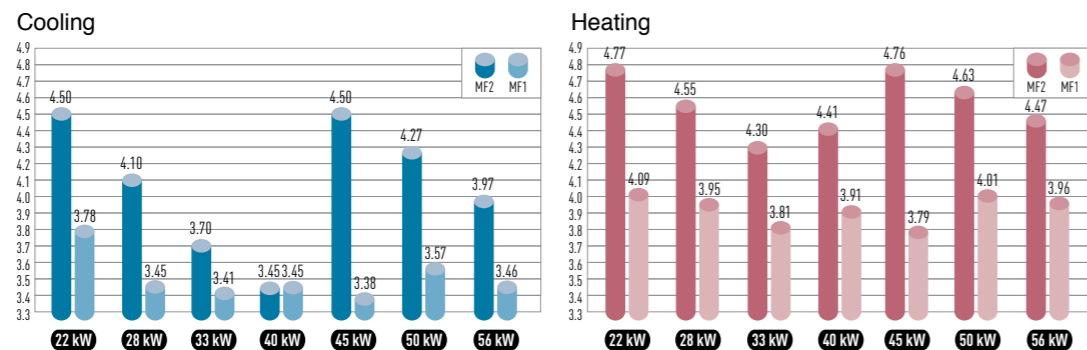

Up to 40m piping after first branch


Up to 52 units can be connected to one system. Flexible piping layout makes it easier to design systems for locations such as train stations, airports, schools, hospitals, and aged care facilities.

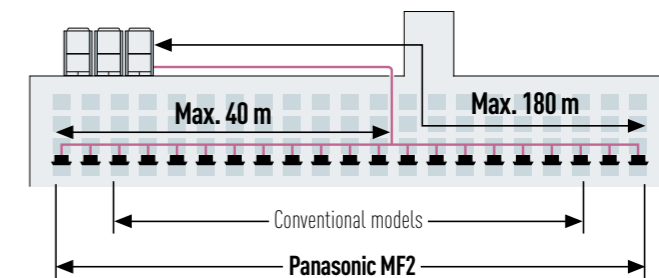

Extended operating range


Cooling operation range:

The cooling operation range has been extended to -10°C DB.

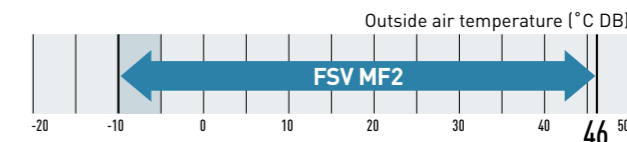

Heating operation range:

Stable heating operation even with an outside air temperature of -20°C WB
The heating operation range has been extended to -20°C WB.

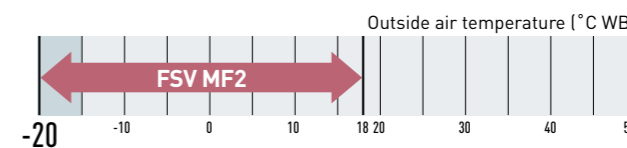


Remark: Cooling/heating capacity depend on indoor/outdoor temperature. Please refer technical databook.

Wide temperature setting range

Wired remote control heating temperature setting range is 16 to 30°C

Compact design


The new MF2 series has reduced the installation space required with up to 40.0 kW available in a single chassis. 22.4-40 kW are able to fit inside a lift for easy handling on site.

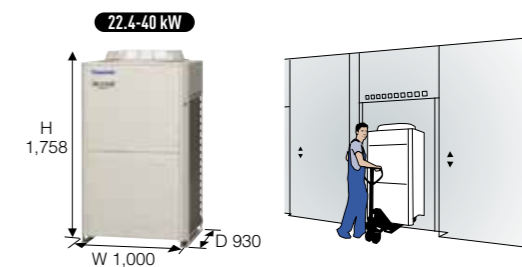

Newly designed fan


Optimised air flow

Newly designed fan and bell-mouth reduces stress on the fan by dispersing air quickly. Thus, lower air resistance results in lower energy consumption.



Noise reduction

Turbulence (blue) can be suppressed and the unwanted noise can be reduced. Even though a high speed fan is utilised, the noise level is still very low.



Simultaneous heating and cooling VRF system 3-WAY FSV MF2 Series

High outdoor unit static pressure


Customisable on site settings allow all models to provide up to 80Pa due to newly designed fan, fan guard, fan motor and casing. The flexible design allows connection of an air discharge duct to avoid a reduction in performance due to a shortage of air circulation. This feature allows the outdoor unit to be installed inside balconies on every floor of tall buildings.



Extended compressor life by uniform compressor operation time

The total run-time of compressors are monitored by a built-in microcomputer, which ensures that operation times of all compressors within the same refrigerant circuit are balanced.


Compressors with histories showing shorter run times are selected first, ensuring equal wear and tear across all units and extended the working life of the system.

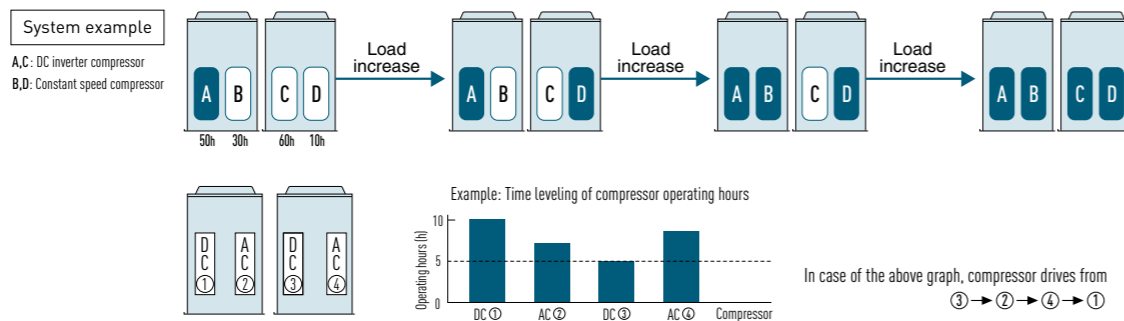

Automatic backup operation in the case of compressor failure or outdoor unit malfunction

(Except for single unit installation)


*Backup operation allows uninterrupted cooling or heating to continue whilst waiting for service. Users should contact their authorised service centre as soon as fault occurs.

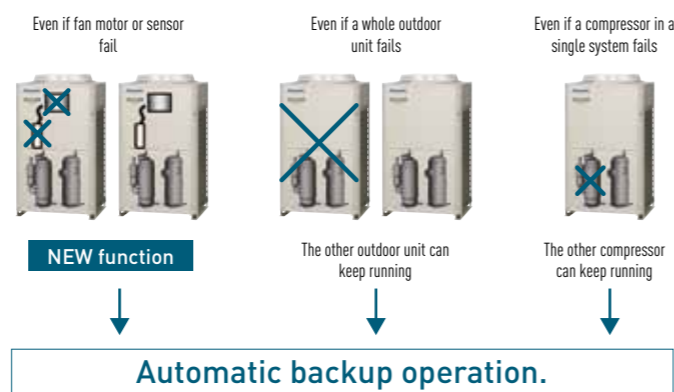

Demand response compliant

Featuring inverter control technology, all Panasonic FSV systems are Demand Response Management (DRM) ready. With this control, power consumption at times of peak load can be set in three steps to deliver optimum performance. This feature is fully compliant with both AS4755 and AS3823, which are due to implemented shortly.


Demand control terminal is available to control 0-50-75-100% of capacities.

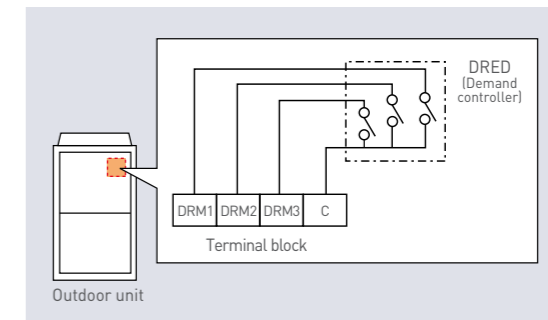

Demand Response Signal	Power Input
DRM 1	0%
DRM 2	50%
DRM 3	75%

Flexible Demand Response with the CZ-CAPDC2*1

Setting is possible as 0% or in the range from 40 to 100% (in steps of 5%). At the time of shipping, setting has been done to the three steps of 0%, 70% and 100%.

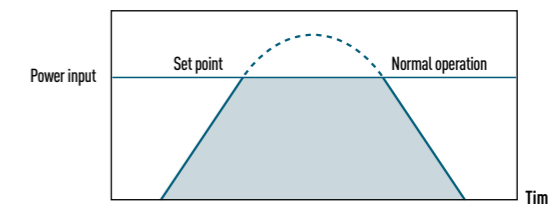

*1 An outdoor Seri-Para I/O unit (CZ-CAPDC2) is required for demand input signal.


	Power input	
Level 1	100% (Preset)	Possible to change 40-100%
Level 2	70% (Preset)	
Level 3	0% (Always in stop condition)	

Hi-durable model available




[On Demand Production]

A hi-durable model is available that can withstand corrosive environments to provide extended life. As well as the heat exchanger, various other parts are specially treated for further durability.

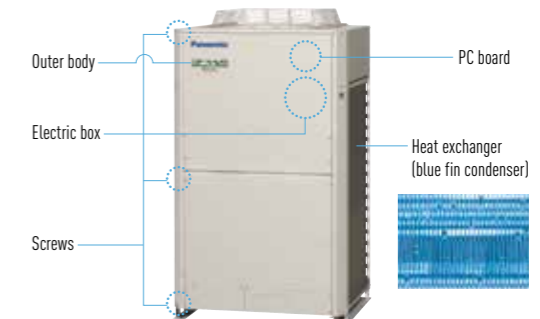Note: Selecting this unit does not completely eliminate the possibility of rust developing. For details concerning unit installation and maintenance, please consult an authorised dealer.




3-WAY FSV MF2 Series


Appearance																						
HP		22.4	28.0	33.5	40.0	45.0	50.0	56.0		61.5	68.0	73.0	78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0		
Model name		U-8MF2R7	U-10MF2R7	U-12MF2R8	U-14MF2R8	U-8MF2R7 U-8MF2R7	U-9MF2R7 U-10MF2R7	U-8MF2R7 U-12MF2R8		U-8MF2R7 U-14MF2R8	U-10MF2R7 U-14MF2R8	U-12MF2R8 U-14MF2R8	U-14MF2R8 U-14MF2R8	U-8MF2R7 U-8MF2R7 U-14MF2R8	U-8MF2R7 U-12MF2R8 U-12MF2R8	U-8MF2R7 U-12MF2R8 U-14MF2R8	U-8MF2R7 U-14MF2R8 U-14MF2R8	U-10MF2R7 U-14MF2R8 U-14MF2R8	U-12MF2R8 U-14MF2R8 U-14MF2R8	U-14MF2R8 U-14MF2R8		
Power supply		415V3-phase/50Hz								415V3-phase/50Hz												
Capacity	Cooling	kW	22.4	28.0	33.5	40.0	45.0	50.4	56.0		61.5	68.0	73.0	78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0	
		BTU/h	76,500	95,600	114,300	136,500	153,600	172,000	191,100		209,900	232,100	249,100	267,900	290,100	307,200	327,600	344,700	365,200	385,700	402,700	
	Heating	kW	25.0	31.5	37.5	45.0	50.0	56.5	63.0		69.0	76.5	81.5	87.5	95.0	100.0	108.0	113.0	119.0	127.0	132.0	
		BTU/h	85,300	107,500	128,000	153,600	170,600	192,800	215,000		235,500	261,100	278,200	298,600	324,200	341,300	368,600	385,700	406,100	433,400	450,500	
EER / COP	Cooling	W/W	4.50	4.10	3.70	3.45	4.50	4.27	3.97		3.80	3.70	3.58	3.49	3.94	3.86	3.74	3.66	3.61	3.53	3.48	
	Heating	W/W	4.77	4.55	4.30	4.41	4.76	4.63	4.47		4.57	4.47	4.38	4.49	4.59	4.41	4.44	4.52	4.49	4.39	4.46	
Dimensions	H x W x D	mm	1,758x1,000x 930	1,758x1,000x 930	1,758x1,000x 930	1,758x1,000x 930	1,758x2,060x 930	1,758x2,060x 930	1,758x2,060x 930		1,758x2,060x 930	1,758x2,060x 930	1,758x2,060x 930	1,758x2,060x 930	1,758x3,120x 930	1,758x3,120x 930	1,758x3,120x 930	1,758x3,120x 930	1,758x3,120x 930	1,758x3,120x 930	1,758x3,120x 930	
Net weight		kg	269	269	314	322	538	538	583		591	591	636	644	860	897	905	913	913	958	966	
Electrical ratings	Cooling	Running current	A	8.0	10.6	15.1/14.5/14.1	19.2/18.4/17.9	17.3/16.4/16.0	19.7/18.9/18.4	23.8/22.9/22.3		27.0/26.0/25.3	30.4/29.2/28.4	33.7/32.4/31.5	37.2/35.7/34.8	36.5/35.0/34.1	38.9/37.4/36.4	42.9/41.2/39.7	46.1/44.3/43.1	48.9/46.9/45.8	53.0/50.9/49.6	56.0/53.8/52.4
		Power input	kW	4.98	6.83	9.05	11.6	10.0	11.8	14.1		16.2	18.4	20.4	22.5	21.6	23.3	25.7	27.6	29.6	32.0	33.9
	Heating	Running current	A	8.3	10.7	14.7/14.1/13.8	17.0/16.4/15.9	17.9/17.0/16.6	20.4/19.6/19.1	23.8/22.9/22.3		25.2/24.2/23.6	28.6/27.4/26.7	31.1/29.8/29.1	32.6/31.3/30.5	35.0/33.6/32.7	38.3/36.8/35.9	41.0/39.4/38.4	41.6/39.9/38.9	44.2/42.3/41.3	48.1/46.2/45.0	49.3/47.3/46.1
		Power input	kW	5.24	6.92	8.72	10.2	10.5	12.2	14.1		15.1	17.1	18.6	19.5	20.7	22.7	24.3	25.0	26.5	28.9	29.6
Air flow rate		L/s	2,633	2,967	3,533	3,533	5,267	5,600	6,167		6,167	6,167	7,067	7,067	8,800	9,700	9,700	9,700	10,033	10,600	10,600	
Refrigerant amount at shipment		kg	8.3	8.5	8.8	9.3	16.6	16.8	17.1		17.6	17.8	18.1	18.6	25.9	25.9	26.4	26.9	27.1	27.4	27.9	
Piping connections	Suction pipe	mm (inches)	Ø19.05 (Ø3/4)	Ø22.22 (Ø7/8)	Ø25.40 (Ø1)	Ø25.40 (Ø1)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)		Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	
	Discharge pipe	mm (inches)	Ø15.88 (Ø5/8)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)		Ø25.40 (Ø1)	Ø25.40 (Ø1)	Ø25.40 (Ø1)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	
	Liquid pipe	mm (inches)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø12.70 (Ø1/2)	Ø12.70 (Ø1/2)	Ø12.70 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)		Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	
	Balance pipe	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)		Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	
Ambient temperature operating range			Cooling/Dry: -10°C--+46°C (DB). Heating: -20°C--+18°C (WB) Simultaneous operation: -10°C--+24°C (DB)																			
Sound pressure level	Normal mode	dBA	57	59	61	62	60	61	62.5		63	64	64.5	65	64	65	65	65	66	66.5	67	
	Silent mode	dBA	54	56	58	59	57	58	59.5		60	61	61.5	62	61	62	62	62.5	63	63.5	64	

These specifications subject to change without notice.
 * For mixed heating and cooling operation with an outdoor temperature in excess of 24°C DB, please use 50% or more of the horsepower of the outdoor unit for cooling operation.


System example

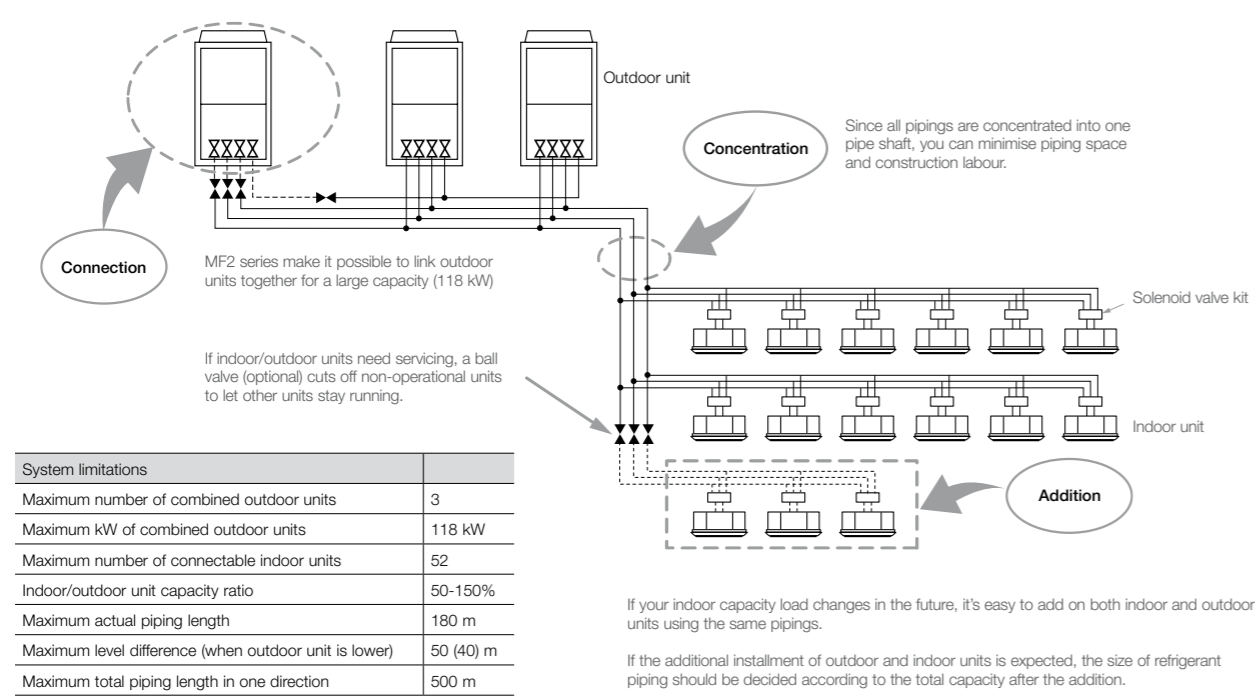

Dimensions

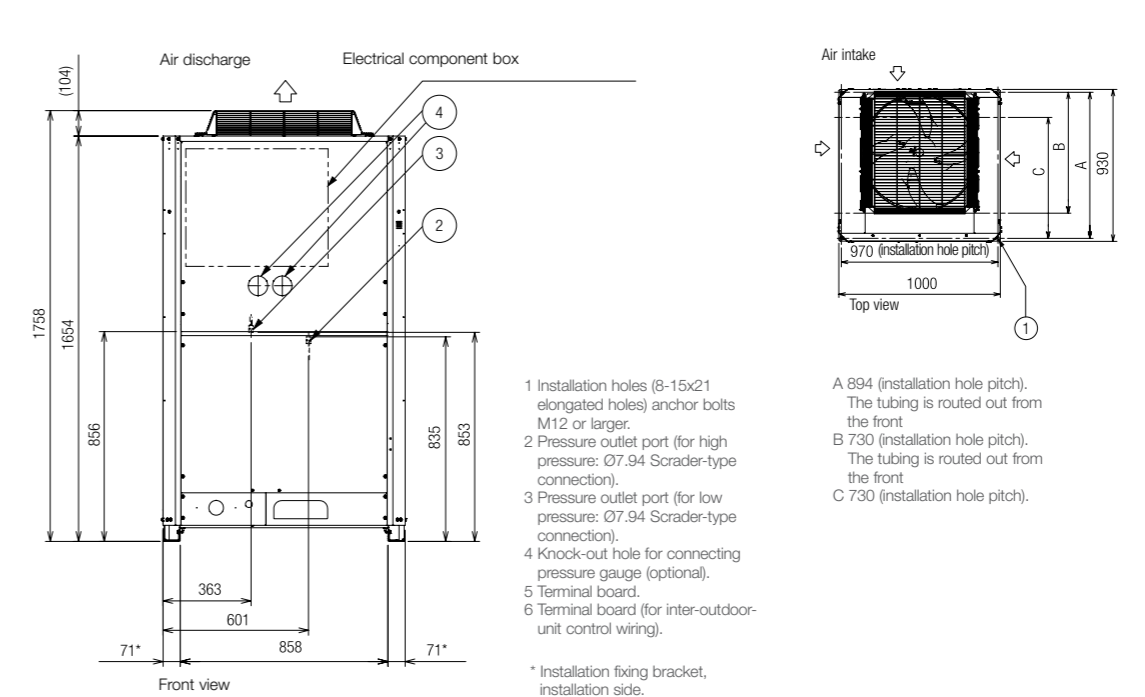

Piping design

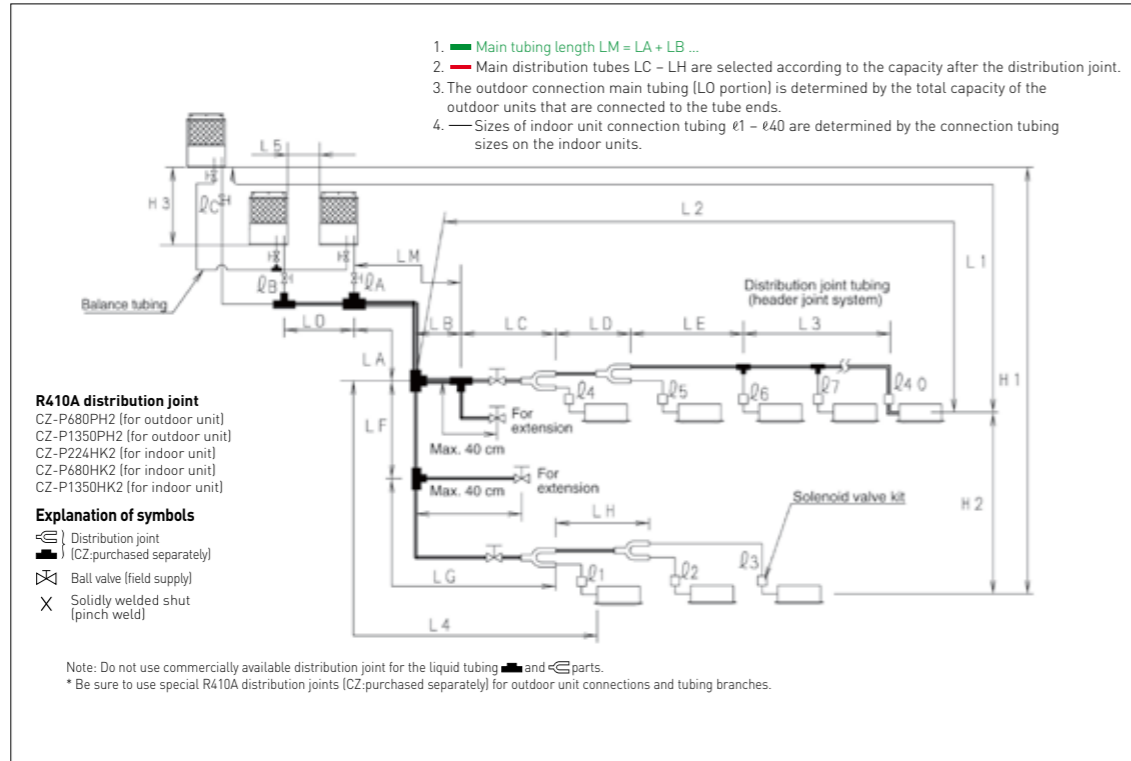

Ranges that apply to refrigerant piping lengths and to differences in installation heights

Items	Mark	Contents	Length (m)
Allowable piping length	L1	Max. piping length	Actual piping length ≤ 180 Equivalent piping length ≤ 200
	$\Delta L (L2 - L4)$	Difference between the max. length and the min. length from the No.1 distribution joint	≤ 40
	LM	Max. length of main piping (at max. diameter)	≤ 50
	$\phi 1, \phi 2 \dots \phi 40$	Max. length of each distribution pipe	≤ 30
	$L1 + \phi 1 + \phi 2 \dots \phi 39 + \phi A + \phi B + LF + LG + LH$	Total max. piping length including length of each distribution (only liquid tubing)	≤ 500
Allowable elevation difference	L5	Distance between Outdoor unit	≤ 10
	H1	When outdoor unit is installed higher than indoor unit	≤ 50
	H2	When outdoor unit is installed lower than indoor unit	≤ 40
	H3	Max. difference between indoor units	≤ 15
Allowable length of joint tubing	L3	Distribution joint tubing ; Max. tubing length between the first distribution joint and solidly welded-shut end point	≤ 2

L = Length, H = Height
 □ If the longest tubing length (L1) exceeds 90 m (equivalent length), increase the sizes of the main tubes (LM) by 1 rank for the discharge tubes, and narrow tubes. (field supplied).
 □ If the longest main tube length (LM) exceeds 50 m, increase the main tube size at the portion before 50 m by 1 rank for the suction tubes and discharge tubes. (field supplied). (For the portion that exceeds 50 m, set based on the main tube sizes [LA] listed in the table on the following page).
 □ 30HP of combination is 300 m.

System limitations

Max. number of combined outdoor units	3
Max. HP of combined outdoor units	118 kW
Max. number of connectable indoor units	52
Indoor/outdoor unit capacity ratio	50-150%

*1: In the case of 68.0 kW or smaller units, the number is limited by the total capacity of the connected indoor units.
 *2: Up to 3 units can be connected if the system has been extended.
 *3: It is strongly recommended that you choose the unit so the load is between 50 and 130 %.

Additional refrigerant charge

Liquid piping size mm (inches)	Amount of refrigerant charge/m (g/m)
$\phi 6.35 (\phi 1/4)$	26
$\phi 9.52 (\phi 3/8)$	56
$\phi 12.7 (\phi 1/2)$	128
$\phi 15.88 (\phi 5/8)$	185
$\phi 19.05 (\phi 3/4)$	259
$\phi 22.22 (\phi 7/8)$	366

Distribution joint kits

Remarks	Model name	Cooling capacity after distribution
For outdoor unit	1. CZ-P680PH2	68.0 kW or less
	2. CZ-P1350PH2	118.0 kW or less
For indoor unit	3. CZ-P224BH2	22.4 kW or less
	4. CZ-P680BH2	68.0 kW or less
	5. CZ-P1350BH2	118.0 kW or less

Refrigerant piping

Piping size mm (inches)		1/2 H, H material	
Outer diameter	Wall thickness	Outer diameter	Wall thickness
$\phi 6.35 (\phi 1/4)$	t 0.8 mm	$\phi 25.4 (\phi 1)$	t 1.0 mm
$\phi 9.52 (\phi 3/8)$	t 0.8 mm	$\phi 28.58 (\phi 1-1/8)$	t 1.0 mm
$\phi 12.7 (\phi 1/2)$	t 0.8 mm	$\phi 31.75 (\phi 1-1/4)$	t 1.1 mm
$\phi 15.88 (\phi 5/8)$	t 1.0 mm	$\phi 38.1 (\phi 1-1/2)$	t 1.15 mm
$\phi 19.05 (\phi 3/4)$	t 1.0 mm	$\phi 41.28 (\phi 1-5/8)$	t 1.20 mm
$\phi 22.22 (\phi 7/8)$	t 1.15 mm		

Note: When pipe bending is to be performed, the bending radius shall be at least 4 times the outer diameter. Also, take sufficient care to prevent pipe collapse and damage at the time of bending.

Refrigerant Branch Pipes (optional accessories) for 3-Way MF2 Series


Optional Distribution Joint Kits

See the installation instructions packaged with the distribution joint kit for the installation procedure.

Model name	capacity after distribution JOINT	Remarks
1. CZ-P680PH2	68.0 kW or less	For outdoor unit
2. CZ-P1350PH2	greater than 68.0 kW and no more than 118.0 kW	For outdoor unit
3. CZ-P224BH2	22.4 kW or less	For indoor unit
4. CZ-P680BH2	greater than 22.4 kW and no more than 68.0 kW	For indoor unit
5. CZ-P1350BH2	greater than 68.0 kW and no more than 118.0 kW	For indoor unit

1. CZ-P680PH2


Use: For outdoor unit (Capacity after distribution joint is 68.0 kW or less.)

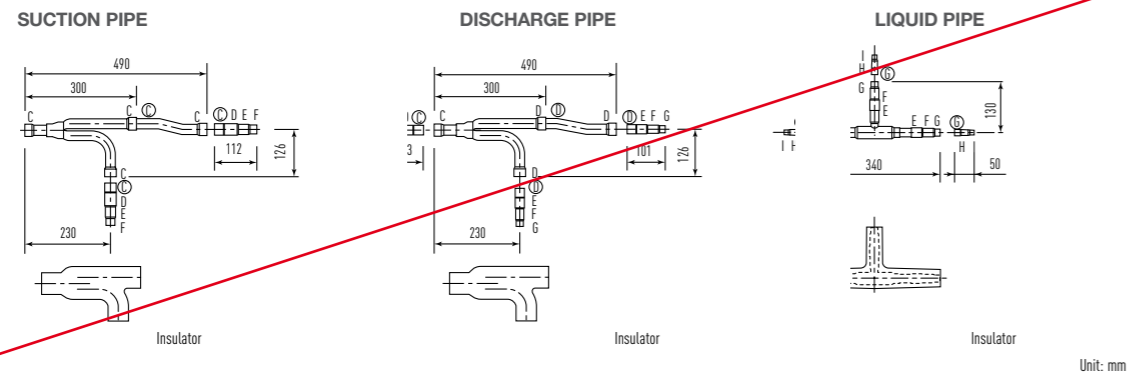

Dimensions for connections of each part										
Position	A	B	C	D	E	F	G	H	I	J
Dimension (mm)	Ø38.10	Ø31.75	Ø28.58	Ø25.40	Ø22.22	Ø19.05	Ø15.88	Ø12.70	Ø9.52	Ø6.35
Dimension (inches)	Ø1-1/2	Ø1-1/4	Ø1-1/8	Ø1	Ø7/8	Ø3/4	Ø5/8	Ø1/2	Ø3/8	Ø1/4

2. CZ-P1350PH2

Use: For outdoor unit (Capacity after distribution joint is greater than 68.0 kW and no more than 118.0 kW.)

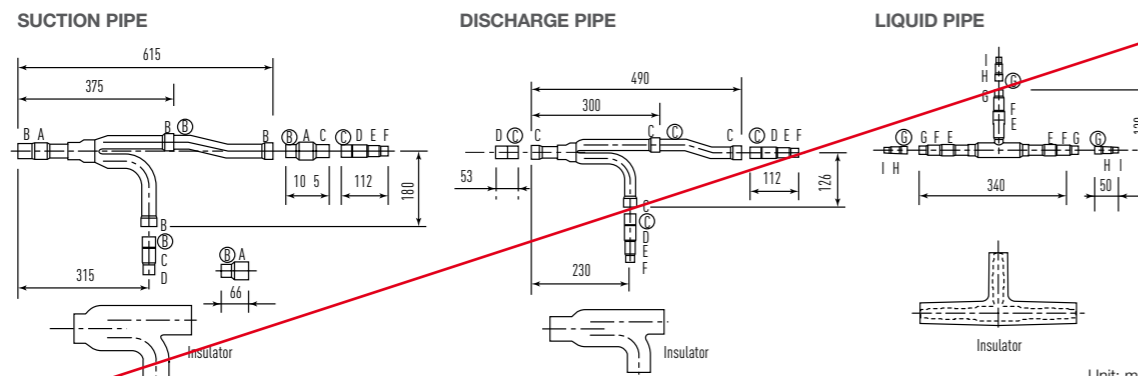


Dimensions for connections of each part										
Position	A	B	C	D	E	F	G	H	I	J
Dimension (mm)	Ø38.10	Ø31.75	Ø28.58	Ø25.40	Ø22.22	Ø19.05	Ø15.88	Ø12.70	Ø9.52	Ø6.35
Dimension (inches)	Ø1-1/2	Ø1-1/4	Ø1-1/8	Ø1	Ø7/8	Ø3/4	Ø5/8	Ø1/2	Ø3/8	Ø1/4

Example: {F below indicates inner diameter. Ⓞ below indicates outer diameter.}

3. CZ-P224BH2


Use: For indoor unit (Capacity after distribution joint is 22.4 kW or less.)

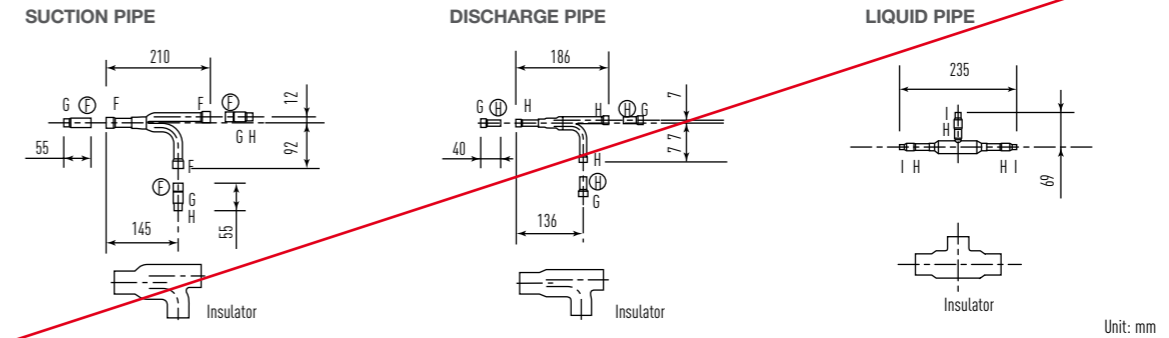

Dimensions for connections of each part										
Position	A	B	C	D	E	F	G	H	I	J
Dimension (mm)	Ø38.10	Ø31.75	Ø28.58	Ø25.40	Ø22.22	Ø19.05	Ø15.88	Ø12.70	Ø9.52	Ø6.35
Dimension (inches)	Ø1-1/2	Ø1-1/4	Ø1-1/8	Ø1	Ø7/8	Ø3/4	Ø5/8	Ø1/2	Ø3/8	Ø1/4

4. CZ-P680BH2


Use: For indoor unit (Capacity after distribution joint is greater than 22.4 kW and no more than 68.0 kW.)

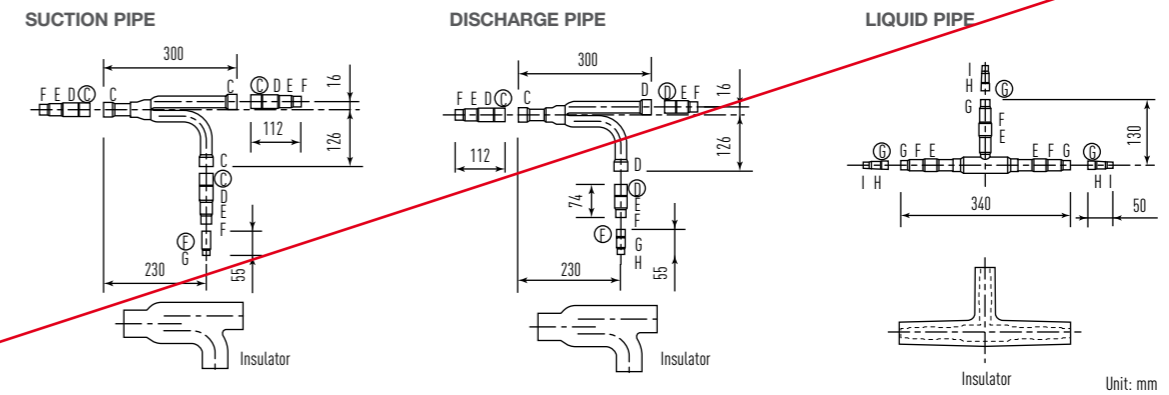

Dimensions for connections of each part										
Position	A	B	C	D	E	F	G	H	I	J
Dimension (mm)	Ø38.10	Ø31.75	Ø28.58	Ø25.40	Ø22.22	Ø19.05	Ø15.88	Ø12.70	Ø9.52	Ø6.35
Dimension (inches)	Ø1-1/2	Ø1-1/4	Ø1-1/8	Ø1	Ø7/8	Ø3/4	Ø5/8	Ø1/2	Ø3/8	Ø1/4

5. CZ-P1350BH2

Use: For indoor unit (Capacity after distribution joint is greater than 68.0 kW and no more than 118.0 kW.)

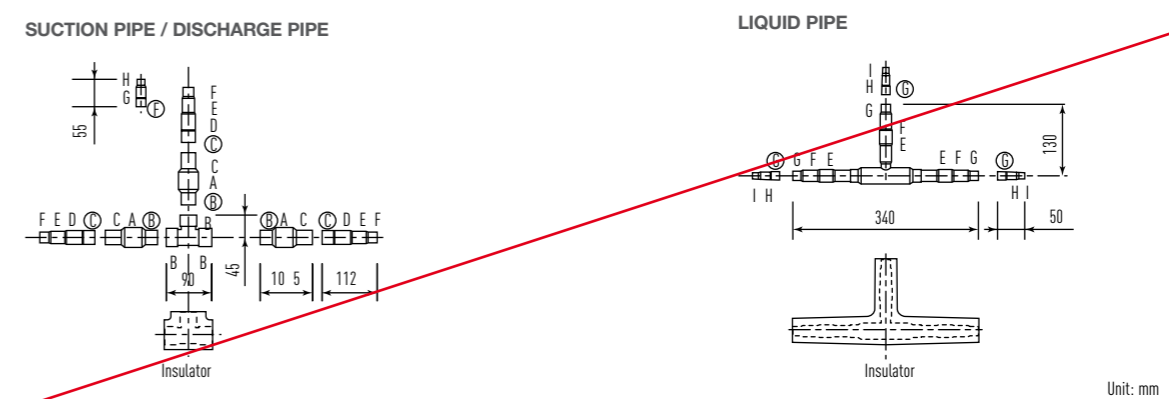

Dimensions for connections of each part										
Position	A	B	C	D	E	F	G	H	I	J
Dimension (mm)	Ø38.10	Ø31.75	Ø28.58	Ø25.40	Ø22.22	Ø19.05	Ø15.88	Ø12.70	Ø9.52	Ø6.35
Dimension (inches)	Ø1-1/2	Ø1-1/4	Ø1-1/8	Ø1	Ø7/8	Ø3/4	Ø5/8	Ø1/2	Ø3/8	Ø1/4

Panasonic Design Support Software for FSV NEW




System designing for VRF (FSV ME1, LE1, MF2 and FS Multi) has never been easier

Panasonic has identified the importance of ever-increasing demands for fast and accurate responses to customer requests in our industry. More and more emphasis is being placed upon energy-efficiency in our marketplace. The ability to calculate cooling/heating loads and produce information of actual design conditions is a major advantage to any architect, consultant, contractor or end user.

Panasonic understands the time-poor and demanding industry we are in and we are pleased to announce the launch of the next generation of our system design software program. The Panasonic VRF Designer software has been customised to make the selection and design process as quick and easy as possible.





The design package utilises system wizards and import tools to enable both simple and complex systems to be created. In addition, the system will allow outdoor and indoor units to be dragged on an interactive desktop. This allows users to create everything from realistic floor plans with detailed piping and wiring schematics to send out with quotations, through to installation guidance drawings.

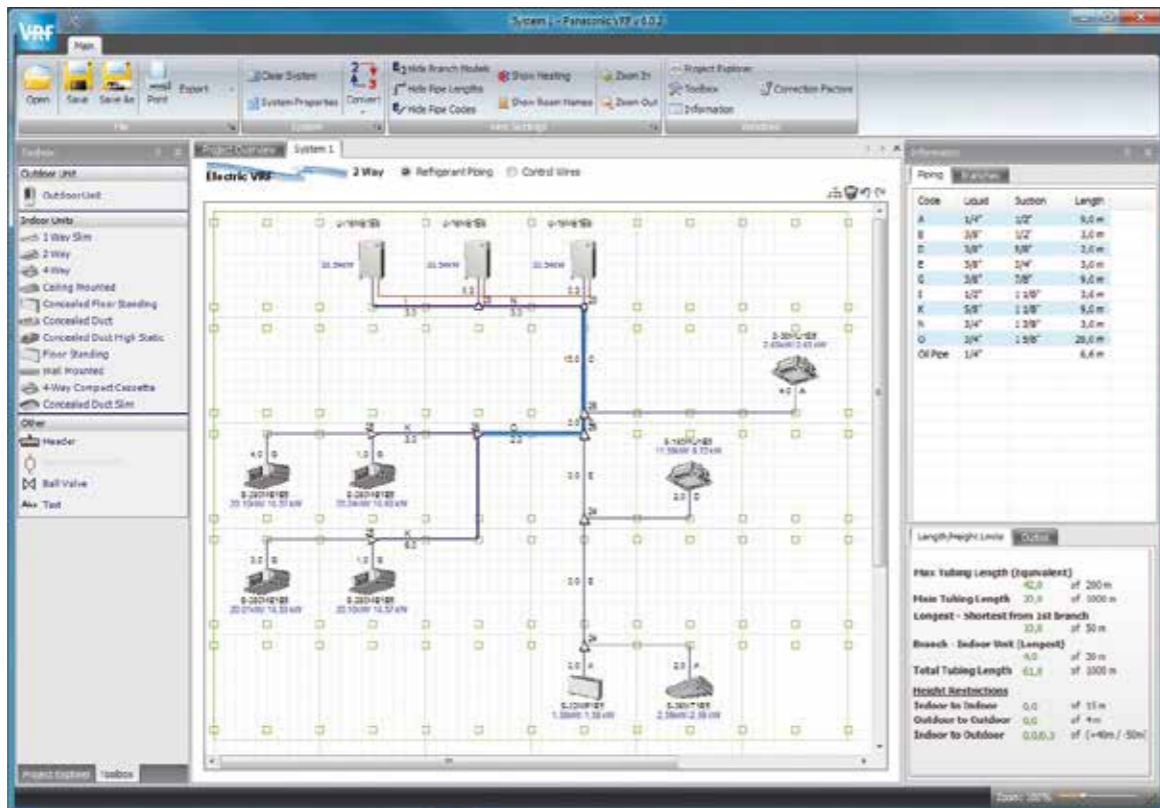

The Panasonic VRF Designer software can be used for all Panasonic FSV ME1, LE1, MF2 and FS Multi

Features include

- Easy to use system wizards.
- Auto piping and wiring features.
- Converted duties for conditions and pipework
- Auto(CAD) [DXF], Excel and PDF export.
- Detailed wiring and pipework diagrams.

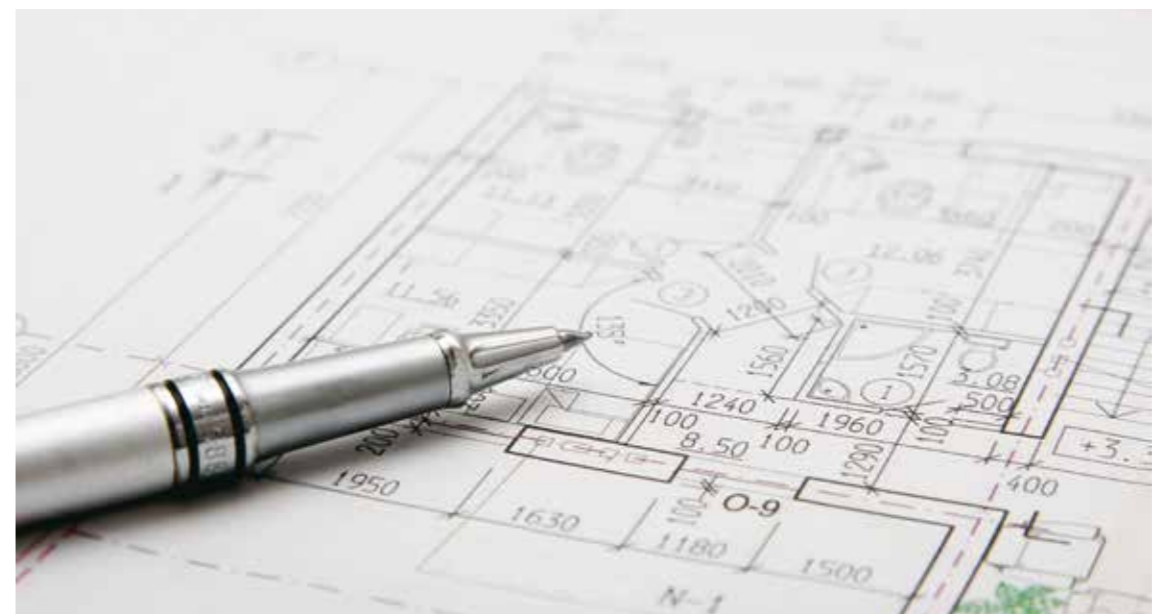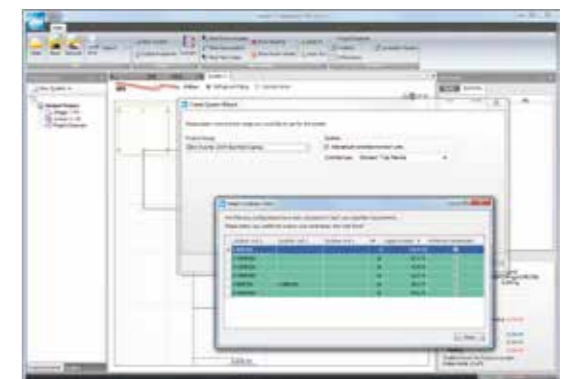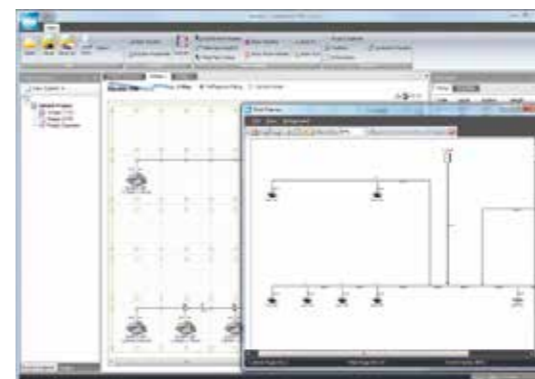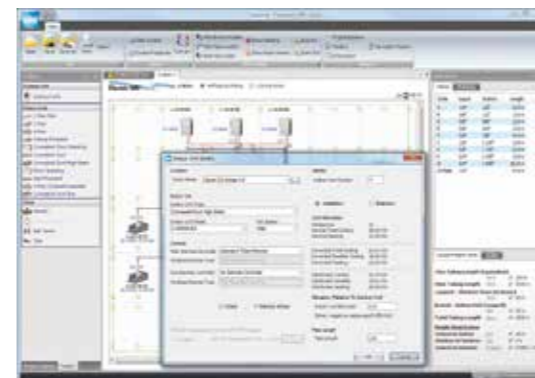

Indoor Units

Wide choice of models depending on the indoor requirements



F2 type / Mid Static Ducted

Variable external static pressure control

Optimal airflow set-up is flexible to suit varying on ducting design conditions.

For short ducting such as hotels

10Pa



150Pa

For long ducting or for usage with high efficiency filter

* Please refer technical databook for details.

Optimal Control by New DC Fan Motor


Standardised height of 290 mm for all models



Discharge air temperature control


Smart sensors control discharge air temperature for precise room temperature control.

Possible to reduce cold drafts during heating operation.

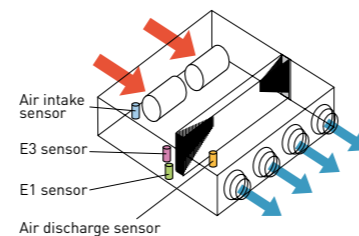

High lift drain pump

A drain pump is built into the unit to raise condensation up to 70cm from the base of the unit.



Z1 type / Slim Low Static Ducted Twenty Series **NEW**

Ultra-slim profile

200mm height for all models allows installation in very narrow ceilings.



Drain pump with increased power! (optional)



K2 / K1 type / Wall Mounted

Compact design with flat surface enables seamless match with any type of room interior



Noise reducing external valve kit

To reduce noise level of expansion valve. (Optional accessory)

CZ-P56SVK2 (for 22 - 56 type)
CZ-P160SVK2 (for 73 - 106 type)



Washable front panel.

The indoor unit's front panel can be easily removed and washed for easy maintenance.

Anti-mould filters are offered as standard filter.



U1 type / 4-WAY Cassette

New technology for more energy savings



Higher efficiency split fin

Improved heat transfer coefficient by adopting high efficiency grooved heat exchanger tube.

New DC-Fan motor

Realising optimum air-flow by a new DC-fan motor with independent control.

High efficiency and quiet turbo fan

Development of bigger fan chassis and optimised design of airflow path results in higher air volume and lower noise level.

Individual flap control

Flexible airflow direction enables 4 flaps to be individually controlled by setting on wired remote controller.

Remote Temperature Sensor (CZ-CSRC2)



- This is a remote sensor which can be used with indoor units. Use it to detect the room temperature when no remote controller sensor or body sensor is used (connection to a system without a remote controller is possible).
- For joint use with a remote control switch, use the remote control switch as main remote controller.

FSV Indoor Units Range

Wide choice of models depending on the indoor requirements

Class	22	28	36	45	56	60	73		90	106	140	160	224	280	Wireless remote control		Functions
Capacity	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating		Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Type with built-in sensor	Type with separately installed sensor	
Type	2.2/2.5 7,500/8,500	2.8/3.2 9,600/11,000	3.6/4.2 12,000/14,000	4.5/5.0 15,000/17,000	5.6/6.3 19,000/21,000	6.0/7.1 20,400/24,200	7.3/8.0 25,000/27,000		9.0/10.0 30,000/34,000	10.6/11.4 36,000/39,000	14.0/16.0 47,800/54,600	16.0/18.0 54,600/61,500	22.4/25.0 76,400/85,300	28.0/31.5 95,500/107,500			
U1 type 4-Way Cassette Panel No. CZ-KPU2															●	●	self-diagnosing, Auto fan, MILD DRY, AUTO Auto flap, Auto restart, Air swing, DP Drain pump
Y2 type 4-Way Mini Cassette Panel No. CZ-KPY3	NEW	NEW	NEW	NEW	NEW										●	●	self-diagnosing, Auto fan, MILD DRY, AUTO Auto flap, Auto restart, Air swing, DP Drain pump
Y1 type 4-Way Mini Cassette Panel No. CZ-KPY2															●	●	self-diagnosing, Auto fan, MILD DRY, AUTO Auto flap, Auto restart, Air swing, DP Drain pump
L1 type 2-Way Cassette Panel No. CZ-02KPL2 Panel No. CZ-03KPL2 (Only for S-73ML1E5)															●	●	self-diagnosing, Auto fan, MILD DRY, AUTO Auto flap, Auto restart, Air swing, DP Drain pump
D1 type 1-Way Cassette Panel No. CZ-KPD2															●	●	self-diagnosing, Auto fan, MILD DRY, AUTO Auto flap, Auto restart, Air swing, DP Drain pump
F2 type Mid Static Ducted																●	self-diagnosing, Auto fan, MILD DRY, AUTO Auto flap, Auto restart, DP Drain pump
M1 type Slim Low Static Ducted																●	self-diagnosing, Auto fan, MILD DRY, AUTO Auto flap, Auto restart, DP Drain pump
Z1 type Slim Low Static Ducted Twenty Series	NEW	NEW	NEW	NEW	NEW	NEW	NEW									●	self-diagnosing, Auto fan, MILD DRY, AUTO Auto flap, Auto restart
E1 type High Static Ducted																●	self-diagnosing, Auto fan, MILD DRY, AUTO Auto flap, Auto restart
T1 type Ceiling															●	●	self-diagnosing, Auto fan, MILD DRY, AUTO Auto flap, Auto restart, Air swing
K2 type K1 type Wall Mounted	NEW	NEW	NEW												●	●	self-diagnosing, Auto fan, MILD DRY, AUTO Auto flap, Auto restart, Air swing
P1 type Floor Standing																●	self-diagnosing, Auto fan, MILD DRY, AUTO Auto flap, Auto restart
R1 type Concealed Floor Standing																●	self-diagnosing, Auto fan, MILD DRY, AUTO Auto flap, Auto restart

U1 TYPE 4-WAY Cassette

Semi concealed cassette

Our best selling U1 Type cassettes are made smaller, slimmer, lighter and come with a standard 950 x 950mm panel for the entire product range.




Technical focus

- Compact design
- Reduced sound levels (from previous models)
- DC fan motor for increased efficiency
- Powerful drain pump gives 850 mm lift
- Lightweight design
- Fresh air knockout
- Branch duct connection
- Optional air-intake plenum CZ-FDU2

Lighter and Slimmer, Easier Installation


A lightweight unit at 24 kg, the unit is also very slim with a height of only 256 mm, making installation possible even in narrow ceilings.

* For 22 - 73 type

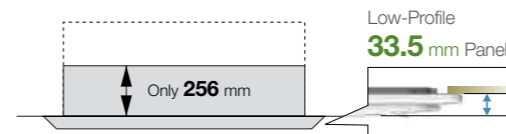


Drain pump of up to 850 mm from the ceiling surface

Built in drain pump allows flexible install and design options with up to 850mm lift. Long horizontal piping is also possible.



Easy fine adjustment of the body suspension height!

The four corners of the ceiling panel have adopted removable corner pockets.

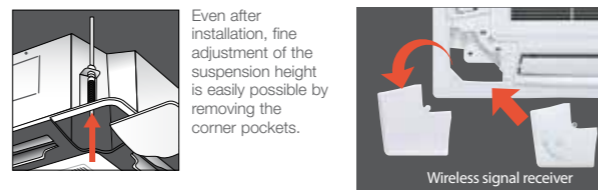

Easy to clean suction grille & flap




It is easy to remove a washable flaps by hand.



Air flow directed to avoid ceiling marks


The condensation and dirt appearing near the discharge ports for conventional ceiling cassettes has been reduced.

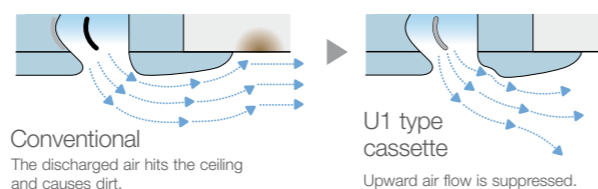


Individual flap control

Flexible air flow direction control by individual flap control is possible. 4 Flaps can be controlled individually by setting on wired timer remote controller. This can allow flexible air-flow control to be matched to several demands in a room.

* It needs pre-setting for this function at system test-run procedure.

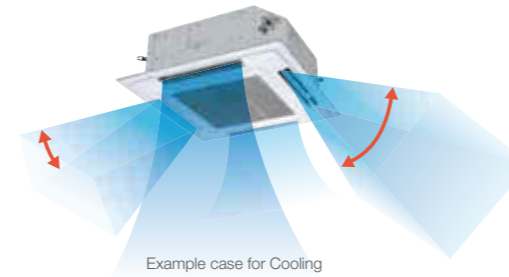

Temperature distribution by thermograph (cooling operation)

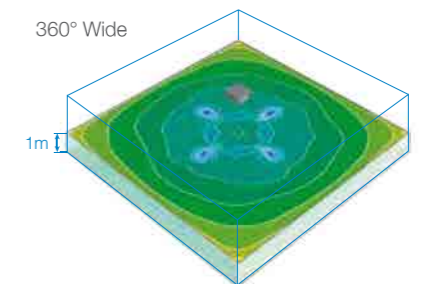

Simulation conditions:
140M 4-way ceiling-mounted cassette type in cooling mode
/ Floor area of 225 m²
/ Ceiling height of 3 m

High-Ceiling Installation (Up to 5 m for 10.6 kW and higher capacity models)

The units can be installed in rooms with high ceilings, where they provide ample floor-level heating in the winter. (See ceiling height guidelines below.)

High Ceiling (Factory settings)

New model	2.7m	3.0m	3.6m
	Capacity	2.2-5.6kW	6.0-9.0kW

10.6-16.0kW	4.5m	4.7m	5m
	Capacity	4-way discharge high ceiling setting 2	3-way discharge with the optional air-blocking materials

Ceiling height guidelines

Indoor unit	*1 settings 4-way discharge			3-way discharge (optional air-blocking materials)	2-way discharge (optional air-blocking materials) *2
	Factory setting 1	High ceiling setting 1	High ceiling setting 2		
2.2-5.6kW	2.7	3.2	3.5	3.8	4.2
6.0-9.0kW	3.0	3.3	3.6	3.8	4.2
10.6-16.0kW	3.6	3.9	4.5	4.7	5.0

*1 When using the unit in a configuration other than the factory settings, it is necessary to make settings on site to increase airflow.
*2 Use air-blocking materials (CZ-CFU2) to completely block two discharge outlets for 2-way airflow.

U1_{TYPE} 4-WAY Cassette

Model Name		S-22MU1E51	S-28MU1E51	S-36MU1E51	S-45MU1E51	S-56MU1E51		S-60MU1E51	S-73MU1E51	S-90MU1E51	S-106MU1E51	S-140MU1E51	S-160MU1E51	
Power source		240 V, 1 phase - 50Hz							240 V, 1 phase - 50Hz					
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6		6.0	7.3	9.0	10.6	14.0	16.0	
	BTU/h	7,500	9,600	12,300	15,400	19,100		20,500	24,900	30,700	36,000	47,800	54,600	
Heating capacity	kW	2.5	3.2	4.2	5.0	6.3		7.10	8.0	10.00	11.4	16.0	18.0	
	BTU/h	8,500	10,900	14,300	17,100	21,500		24,200	27,300	34,100	38,900	54,600	61,400	
Power input	Cooling kW	0.020	0.020	0.020	0.020	0.025		0.035	0.040	0.040	0.095	0.100	0.115	
	Heating kW	0.020	0.020	0.020	0.020	0.025		0.035	0.040	0.040	0.085	0.100	0.105	
Running current	Cooling A	0.18	0.18	0.18	0.19	0.21		0.30	0.32	0.35	0.71	0.73	0.87	
	Heating A	0.16	0.16	0.16	0.17	0.19		0.29	0.31	0.33	0.85	0.73	0.79	
Fan	Type	Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan		Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan	
	Air flow rate (H/M/L) L/s	233/200/183	233/200/183	233/200/183	250/217/200	267/225/200		350/283/233	367/283/233	383/317/250	550/450/350	583/467/367	600/483/383	
	Motor output kW	0.06	0.06	0.06	0.06	0.06		0.06	0.06	0.06	0.09	0.09	0.09	
Sound power level (H/M/L) dB		47/46/45	47/46/45	47/46/45	48/46/45	50/47/45		53/49/46	54/49/46	55/52/49	61/55/51	62/55/51	63/56/53	
Sound pressure level (H/M/L) dB(A)		30/29/28	30/29/28	30/29/28	31/29/28	33/30/28		36/32/29	37/32/29	38/35/32	44/38/34	45/39/35	46/40/38	
Dimensions	H x W x D mm	256+(33.5) x 840 (950) x 840 (950)							319+(33.5) x 840 (950) x 840 (950)					
	Liquid inches (mm)	1/4 (Ø6.35)	1/4 (Ø6.35)	1/4 (Ø6.35)	1/4 (Ø6.35)	1/4 (Ø6.35)		3/8 (Ø9.52)	3/8 (Ø9.52)	3/8 (Ø9.52)	3/8 (Ø9.52)	3/8 (Ø9.52)	3/8 (Ø9.52)	
Pipe connections	Gas inches (mm)	1/2 (Ø12.7)	1/2 (Ø12.7)	1/2 (Ø12.7)	1/2 (Ø12.7)	1/2 (Ø12.7)		5/8 (Ø15.88)	5/8 (Ø15.88)	5/8 (Ø15.88)	5/8 (Ø15.88)	5/8 (Ø15.88)	5/8 (Ø15.88)	
	Drain piping	VP-25	VP-25	VP-25	VP-25	VP-25		VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	
Net weight (Panel) kg		23 (+4)	23 (+4)	23 (+4)	23 (+4)	23 (+4)		24 (+4)	24 (+4)	24 (+4)	27 (+4)	27 (+4)	27 (+4)	


GLOBAL REMARKS	Rated conditions:	
	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB
Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications subject to change without notice.

U1 TYPE 4-WAY CASSETTE Dimensions

- 1 Air intake grill
- 2 Air discharge outlet
- 3 Refrigerant piping (liquid pipes)
22-56 type: ø6.35(flared), 60-160 type: ø9.52(flared)
- 4 Refrigerant piping (gas pipes)
22-56 type: ø12.7(flared), 60-160 type: ø15.88(flared)
- 5 Drain outlet VP25(outer ø32)
- 6 Power supply port
- 7 Discharge duct (ø150)
- 8 Suspension bolt hole (4-12x30 slot)
- 9 Fresh air intake duct connection port (ø100)*1

*1: Air inlet kit is necessary. Filter size: 520 x 520 x 16

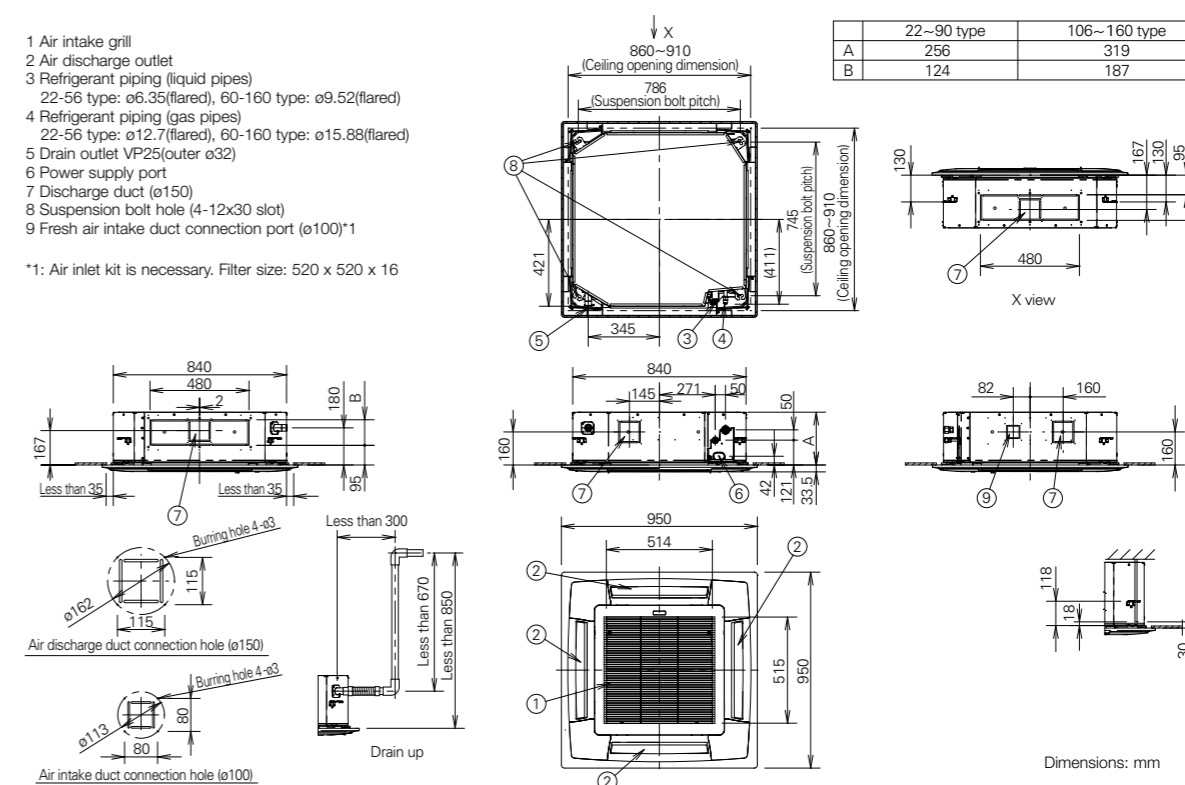

* Adjust the suspension bolt length so that the gap from the lower ceiling surface becomes 30 mm or more (18 mm or more from the lower surface of the body) as shown in the figure. When the suspension bolt length is too long, it hits the ceiling panel and installation is not possible.

Y2_{TYPE} 4-WAY Mini Cassette

Mini semi concealed cassette **NEW**

Designed to fit perfectly into a 60 x 60 cm ceiling grid without the need to alter the bar configuration, the Y2 is ideal for small commercial and retrofit applications. In addition, improvements to the Y2's efficiency make this model one of the most advanced units in the industry.



PANEL
51 x 700 x 700 mm
(HxWxD)
CZ-KPY3




Technical focus

- Mini cassette fits into a 60 x 60 cm ceiling grid
- Anti-mould and anti-bacteria washable filters
- Powerful drain pump gives 750 mm lift
- DC fan motor with variable speed and a new heat exchanger ensures efficient power consumption
- Fresh air knock out
- Multi directional air flow


Compact design

The panel is a compact (70x70 cm) so it can be installed even in a small room where space is limited.

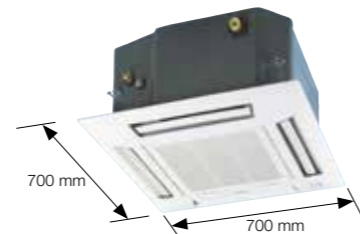


Lighter and slimmer, easier installation

When only 260mm of indoor body height, it can easily fit in limited spaces and tight spots.




A drain height of up to 750 mm from the ceiling surface

The internal pump allows the drain pipe to be elevated up to 750mm above the base of the unit.



Anti-Mould Long-Life Air Filter

Anti-mould and anti-bacteria washable filter ensures clean, healthy air.

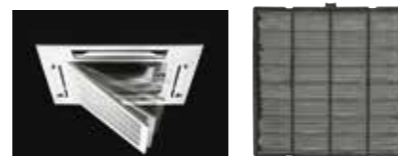


Model Name		S-22MY2E5	S-28MY2E5	S-36MY2E5	S-45MY2E5	S-56MY2E5
Power source		240 V, 1 phase - 50 Hz				
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6
	BTU/h	7,500	9,600	12,000		19,000
Heating capacity	kW	2.5	3.2	4.2	5.0	6.3
	BTU/h	8,500	11,000	14,000	17,000	21,000
Power input	Cooling kW	0.035	0.035	0.040	0.040	0.045
	Heating kW	0.030	0.030	0.035	0.040	0.045
Running amperes	Cooling A					
	Heating A					
Fan motor	Type	TO BE INFORMED				
	Airflow rate (H/M/L) L/s					
	Output kW					
Power sound level (H/M/L)	Cooling dB(A)	50/48/46	50/48/46	51/49/47	53/51/48	55/52/49
	Heating dB(A)	50/48/44	50/48/44	51/49/45	53/51/47	55/52/49
Sound pressure level (H/M/L)	Cooling dB(A)	35/33/31	35/33/31	36/34/32	38/36/33	40/37/34
	Heating dB(A)	35/33/29	35/33/29	36/34/30	38/36/32	40/37/34
Dimensions	H x W x D mm	260 (+51) x 575 (700) x 575 (700)	260 (+51) x 575 (700) x 575 (700)	260 (+51) x 575 (700) x 575 (700)	260 (+51) x 575 (700) x 575 (700)	260 (+51) x 575 (700) x 575 (700)
	Liquid mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
Pipe connections	Gas 410 A mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)
	Drain piping	VP-20	VP-20	VP-20	VP-20	VP-20
Net weight	kg	18 (+2.5)	18 (+2.5)	18 (+2.5)	18 (+2.5)	18 (+2.5)

GLOBAL REMARKS: The values in () for external dimensions and Net weight are the values for the optional ceiling panel. Specifications subject to change without notice.

Rated conditions:	Cooling	Heating
Indoor air temperature	27°C DB / 19°C WB	20°C DB
Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Y2 TYPE 4-WAY CASSETTE Dimensions

- 1 Air intake grill
- 2 Air outlet
- 3 Refrigerant piping (liquid pipe) ø6.35 (flared)
- 4 Refrigerant piping (gas pipe) ø12.7 (flared)
- 5 Drain tube connection port VP25 (outer ø32)
- 6 Power supply entry
- 7 Suspension bolt hole (4-11 x 26 slot)
- 8 Fresh air intake duct connection port (ø80)

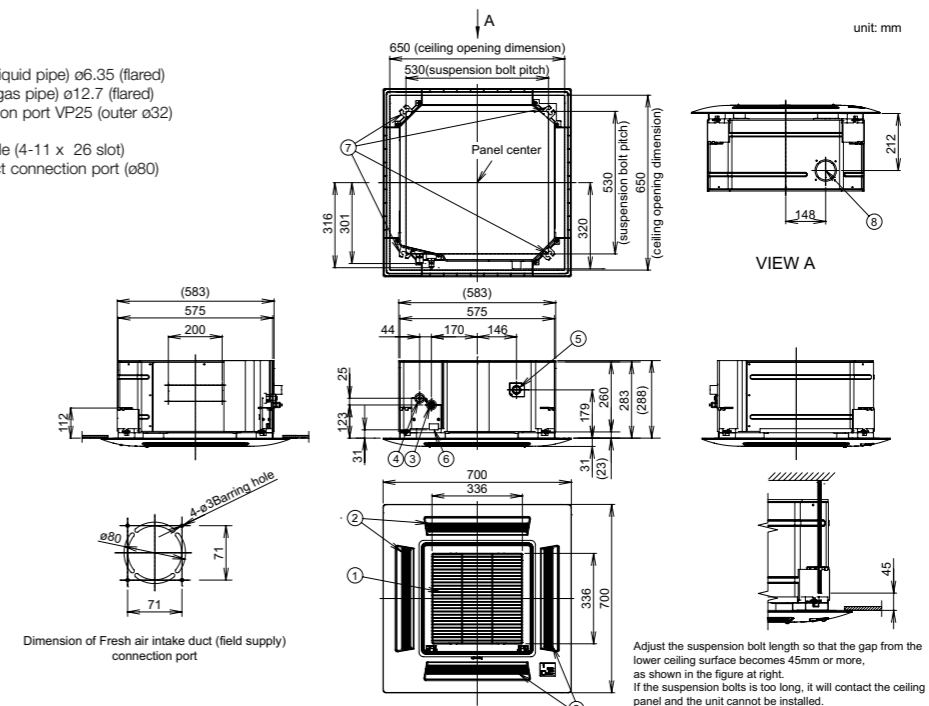

Y1 TYPE 4-WAY Mini Cassette

600x600 Mini semi concealed cassette

Designed to fit perfectly into a 60 x 60 cm ceiling grid without the need to alter the bar configuration, the Y1 is ideal for small commercial and retrofit applications. In addition, improvements to the Y1's efficiency make this one of the most advanced units in the industry.



Technical focus

- Mini cassette fits into a 60 x 60 cm ceiling grid
- Fresh air knock out
- Multi-directional air flow
- Anti-mould and anti-bacteria washable filters
- Powerful drain pump gives 850 mm lift
- Turbo fans and heat exchanger fins with improved design
- DC fan motor with variable speed and a new heat exchanger ensures efficient power consumption


Special removable flap design

The flaps can be removed easily for cleaning.




Lighter and slimmer, easier installation

A lightweight unit at 19 kg, the unit is also very slim with a height of only 283 mm, making installation possible even in narrow ceilings.

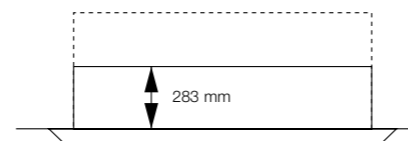

A drain height of up to 850 mm from the ceiling surface

A built-in drain pump allows flexible install and design options with up to 850mm lift. Long horizontal piping is also possible.

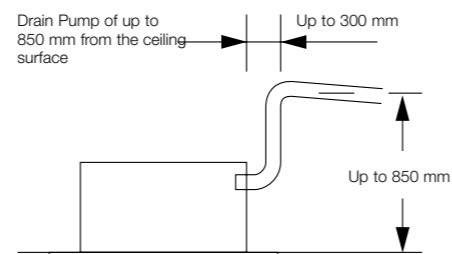


Model Name		S-22MY1E5	S-28MY1E5	S-36MY1E5	S-45MY1E5	S-56MY1E5
Power source		240 V, 1 phase - 50Hz				
Cooling capacity	kW	2.2	2.8	3.6	4.7	5.6
	BTU/h	7,500	9,600	12,000	15,000	19,000
Heating capacity	kW	2.5	3.2	4.2	5.0	6.3
	BTU/h	8,500	11,000	14,000	17,000	21,000
Power input	Cooling kW	0.025	0.025	0.027	0.031	0.038
	Heating kW	0.015	0.015	0.018	0.021	0.029
Running amperes	Cooling A	0.15	0.15	0.17	0.20	0.28
	Heating A	0.12	0.12	0.14	0.17	0.25
Fan motor	Type	Centrifugal fan				
	Airflow rate (H/M/L) L/s	133/117/100	133/117/100	150/133/117	178/142/125	208/175/150
	Output kW	0.030	0.030	0.030	0.030	0.030
Sound power level (H/M/L)	dB(A)	41/38/36	41/38/36	43/40/37	47/43/39	52/48/44
	Sound pressure level (H/M/L) dB(A)	30/27/25	30/27/25	32/29/26	36/32/28	41/37/33
Dimensions	H x W x D mm	283 x 575 (625) x 575 (625)	283 x 575 (625) x 575 (625)	283 x 575 (625) x 575 (625)	283 x 575 (625) x 575 (625)	283 x 575 (625) x 575 (625)
	Liquid inches (mm)	1/4 (Ø6.35)	1/4 (Ø6.35)	1/4 (Ø6.35)	1/4 (Ø6.35)	1/4 (Ø6.35)
	Gas 410 A inches (mm)	1/2 (Ø12.7)	1/2 (Ø12.7)	1/2 (Ø12.7)	1/2 (Ø12.7)	1/2 (Ø12.7)
Pipe connections	Drain piping	VP-20				
	Net weight kg	16 (+2.4)	16 (+2.4)	16 (+2.4)	16 (+2.4)	16 (+2.4)

GLOBAL REMARKS	Rated conditions:	
	Indoor air temperature	Cooling: 27°C DB / 19°C WB Heating: 20°C DB
	Outdoor air temperature	Cooling: 35°C DB / 24°C WB Heating: 7°C DB / 6°C WB

The values in () for external dimensions and Net weight are the values for the optional ceiling panel. Specifications subject to change without notice.

Y1 TYPE 4-WAY CASSETTE Dimensions

- 1 Air intake
- 2 Discharge outlet
- 3 Refrigerant piping (liquid pipes)
Size 22 to 56: Ø6.35 (flared)
- 4 Refrigerant piping (gas pipes)
Size 22 to 56: Ø12.7 (flared)
- 5 Drain tube connection port VP20 (outer Ø26)
- 6 Power supply port
- 7 Suspension bolt hole (4-12 x 30 hole)
- 8 Fresh air intake duct connection port (Ø100)

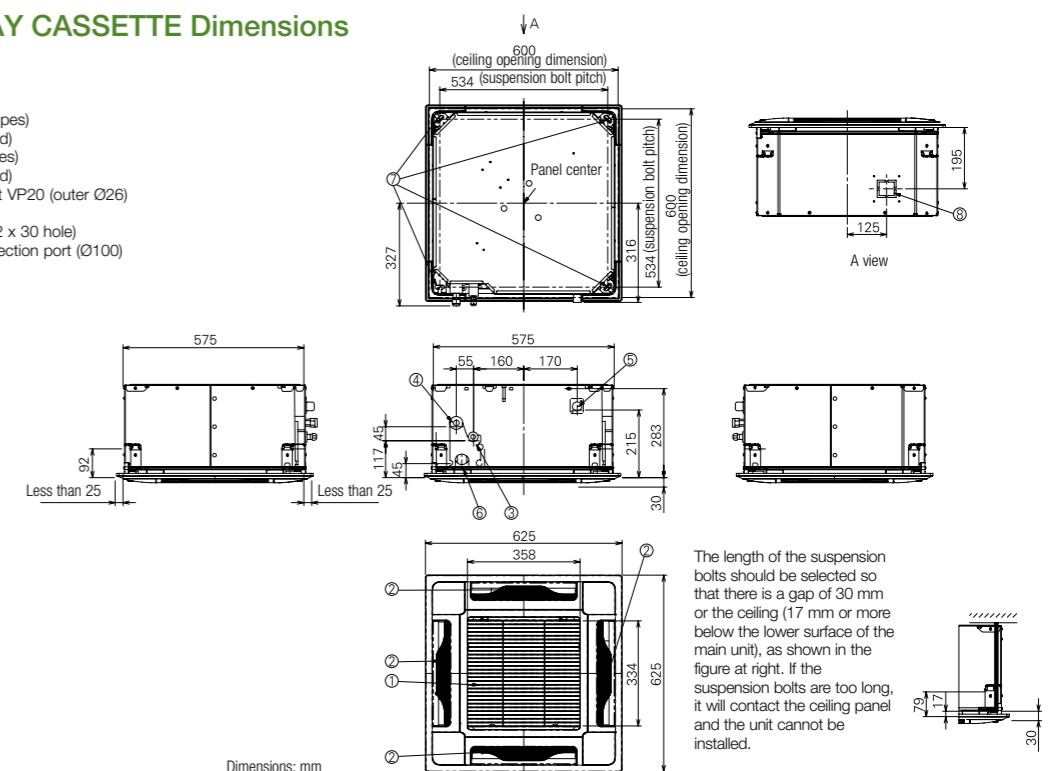

Dimensions: mm

L1 TYPE 2-WAY Cassette

The L1 is very thin, compact and light, allowing flexible install options. A redesigned fan has been used to achieve this size and weight reduction.



PANEL

CZ-02KPL2
Big size panel (for S-73ML1E5)
CZ-03KPL2




Technical focus

- Airflow and distribution is automatically altered depending on the operational mode of the unit
- Drain up is possible up to 500 mm via the built-in drain pump
- Simple maintenance


Auto flap control

Airflow and distribution is automatically altered depending on the operational mode (cooling or heating) of the unit.

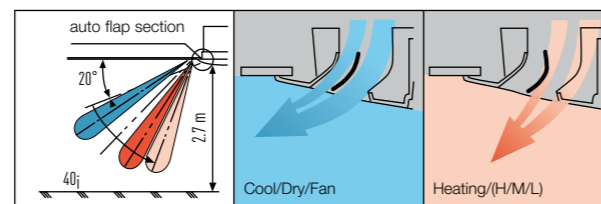

Drain up is possible up to 500 mm via the built-in drain pump.

Maintenance of the drain pump is possible from both sides, from the left side (piping side) and from the inside of the unit.

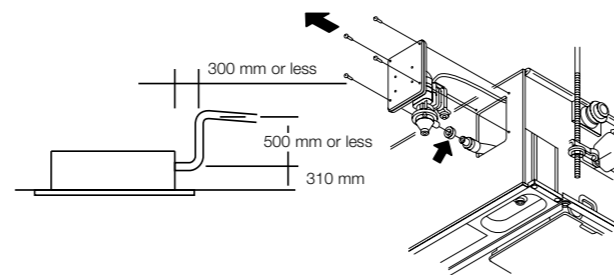

Simple maintenance

The drain pan is equipped with site wiring and can be removed. The fan case has a split construction, and the fan motor can be removed easily when the lower case is removed.


Model Name	S-22ML1E5	S-28ML1E5	S-36ML1E5	S-45ML1E5	S-56ML1E5	S-73ML1E5	
Power source	240V, 1 phase - 50Hz						
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.3
	BTU/h	7,500	9,600	12,000	15,000	19,000	25,000
Heating capacity	kW	2.5	3.2	4.2	5.0	6.3	8.0
	BTU/h	8,500	11,000	14,000	17,000	21,000	27,000
Power input	Cooling kW	0.095	0.097	0.099	0.103	0.103	0.154
	Heating kW	0.062	0.064	0.066	0.070	0.070	0.117
Running current	Cooling A	0.45	0.45	0.45	0.45	0.45	0.66
	Heating A	0.30	0.30	0.30	0.30	0.30	0.49
Fan	Type	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L) L/s	133/117/100	150/133/117	161/144/128	183/150/133	183/150/133	317/267/233
	Motor output kW	0.03	0.03	0.03	0.03	0.03	0.05
Sound power level (H/M/L) dB	40/38/35	44/40/37	45/42/39	46/44/40	46/44/40	49/46/44	
Sound pressure level (H/M/L) dB(A)	30/27/24	33/29/26	34/31/28	35/33/29	35/33/29	38/35/33	
Dimensions H x W x D mm		350+(8)x840 (1,060)x600 (680)	350+(8)x840 (1,060)x600 (680)	350+(8)x840 (1,060)x600 (680)	350+(8)x840 (1,060)x600 (680)	350+(8)x840 (1,060)x600 (680)	350+(8)x 1,140 (1,360)x600 (680)
	Liquid inches (mm)	1/4 (Ø6.35)	1/4 (Ø6.35)	1/4 (Ø6.35)	1/4 (Ø6.35)	1/4 (Ø6.35)	3/8 (Ø9.52)
Pipe connections Gas inches (mm)		1/2 (Ø12.7)	1/2 (Ø12.7)	1/2 (Ø12.7)	1/2 (Ø12.7)	1/2 (Ø12.7)	5/8 (Ø15.88)
	Drain piping	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25
Net weight kg	23 (+5.5)	23 (+5.5)	23 (+5.5)	23 (+5.5)	23 (+5.5)	30 (+9)	

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

The values in () for external dimensions and Net weight are the values for the optional ceiling panel. Specifications subject to change without notice.

L1 TYPE 2-WAY CASSETTE Dimensions

- 1 Air intake
- 2 Air outlet
- 3 Ceiling opening dimensions
- 4 Suspension fitting (notch: 12 mm)
- 5 Refrigerant piping (liquid pipes)
- 6 Refrigerant piping (gas pipes)
- 7 Drain connection VP25 (outer diameter ø 32)
- 8 Inlet for option cord between power supply and unit
- 9 Drain pan, drain pump inspection lid
- 10 Drain pump inspection lid
- 11 Round flange (field supply) mounting part (fresh air inlet ø 125)
- 12 Discharge duct (field supply) mounting part (installation possible only on the right side)
- 13 Wireless remote controller (option) signal receiver installation part

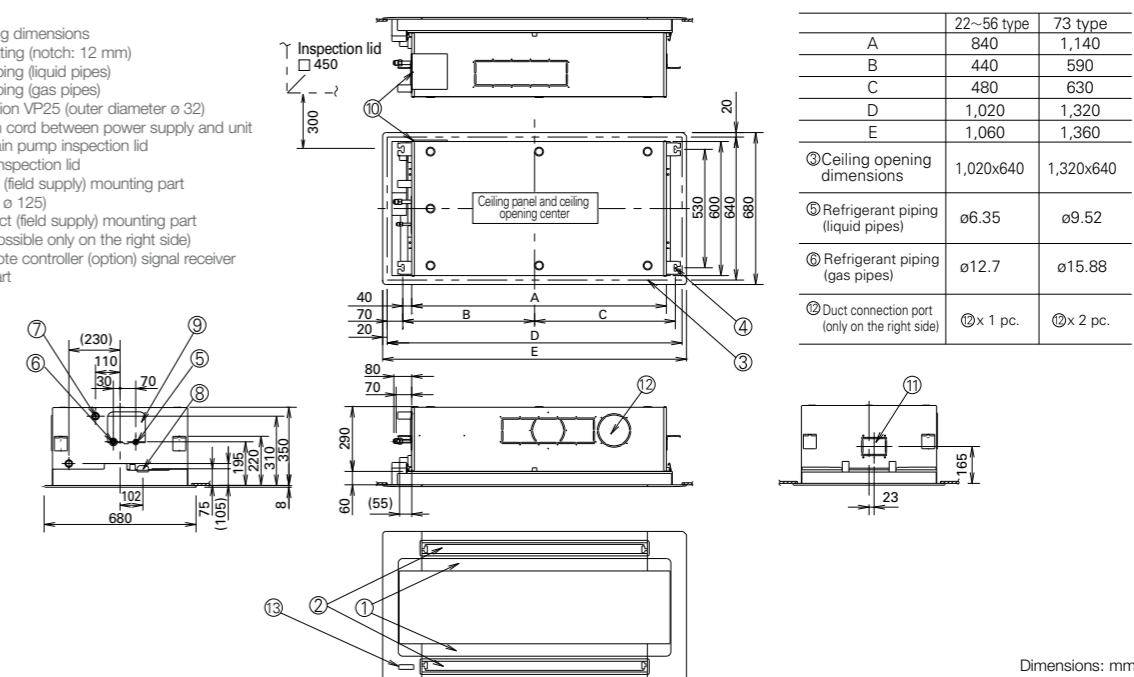

Dimensions: mm

D1 TYPE 1-WAY Cassette

Semi concealed slim cassette

Designed for installation within the ceiling void, the D1 range of slimline 1 way cassettes feature a quiet yet powerful fan that can reach the floor up 4.2 m from ceiling height.




Technical focus

- Ultra-Slim profile
- Suitable for standard and high ceilings
- Built-in drain pump provides 590 mm lift from ceiling
- Easy to install and maintain
- Hanging height can be easily adjusted
- Uses a DC fan motor to improve energy-efficiency

Drain height

A built-in drain pump provides up to 590mm lift from ceiling height for flexible install options.

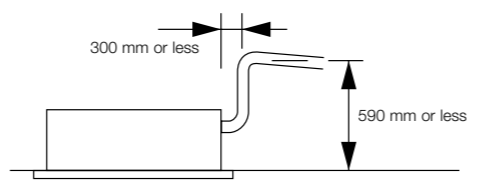

With 3 types of air-blow systems, the units can be used in various ways.



(1) One-direction "down-blow" system
Powerful one-direction "down-blow" system reaches the floor even from high ceilings (up to 4.2 m).



(2) Two-direction ceiling-mounted system
"Down-blow" and "front-blow" systems are combined in a ceiling-mounted unit to blow air over a wide area.



(3) One-direction ceiling-mounted system
This powerful ceiling-mounted "front-blow" system efficiently air-conditions the space in front of the unit. (Additional accessories required)


Model Name	S-28MD1E5	S-36MD1E5	S-45MD1E5	S-56MD1E5	S-73MD1E5	
Power source	240 V, 1 phase - 50Hz					
Cooling capacity	kW	2.8	3.6	4.5	5.6	7.3
	BTU/h	9,600	12,000	15,000	19,000	25,000
Heating capacity	kW	3.2	4.2	5.0	6.3	8.0
	BTU/h	11,000	14,000	17,000	21,000	27,000
Power input	Cooling kW	0.052	0.052	0.052	0.061	0.089
	Heating kW	0.042	0.042	0.042	0.049	0.077
Running current	Cooling A	0.39	0.39	0.39	0.46	0.69
	Heating A	0.35	0.35	0.35	0.41	0.63
Fan	Type	Sirocco fan				
	Air flow rate (H/M/L) L/s	200/167/150	200/167/150	200/183/167	217/192/167	300/250/217
	Motor output kW	0.05				
Sound power level (H/M/L) dB	47/45/44					
Sound pressure level (H/M/L) dB(A)	36/34/33					
Dimensions H x W x D mm	200+(20) x 1,000 (1,230) x 710 (800)					
	200+(20) x 1,000 (1,230) x 710 (800)					
Pipe connections	Liquid inches (mm)	1/4 (Ø6.35)				
	Gas inches (mm)	1/2 (Ø12.7)				
	Drain piping	VP-25				
Net weight kg	21 (+5.5)					

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB	

The values in () for external dimensions and Net weight are the values for the optional ceiling panel. Specifications subject to change without notice.

D1 TYPE 1-WAY CASSETTE Dimensions

- 1 Air intake grille
- 2 Air outlet
- 3 Refrigerant piping (liquid pipes)
Size 28 to 56: Ø6.35 (flared)
Size 73: Ø9.52 (flared)
- 4 Refrigerant piping (gas pipes)
Size 28 to 56: Ø12.7 (flared)
Size 73: Ø15.88 (flared)
- 5 Drain connection VP25 (outer Ø32)
- 6 Power supply entry
- 7 Discharge duct connection port (for descending ceiling)
- 8 Wireless remote control receiver (option)
- 9 Suspension mounting (4-12 x 30 slot)
- 10 Fresh air intake (Ø100)

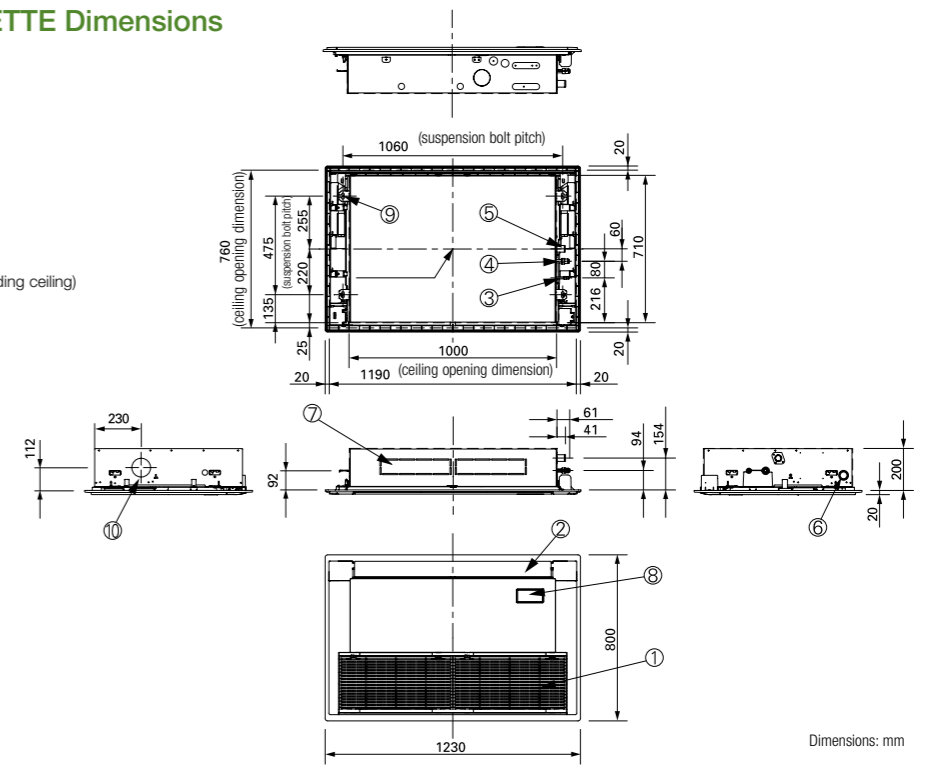

F2_{TYPE} Mid Static Ducted

The new F2 type is designed specifically for applications requiring fixed square ducting. An anti-mould filter is equipped as standard.




Technical focus

- Variable external static pressure control
- Industry-leading low sound levels from 25 dB(A)
- Built-in drain pump provides 702 mm lift
- Easy to install and maintain
- Air off sensor avoids cold air drafts during heating operation
- Configurable air temperature control
- Anti-mould washable filters included

Variable external static pressure control


Optimal airflow set-up is possible depending on ducting design and conditions.

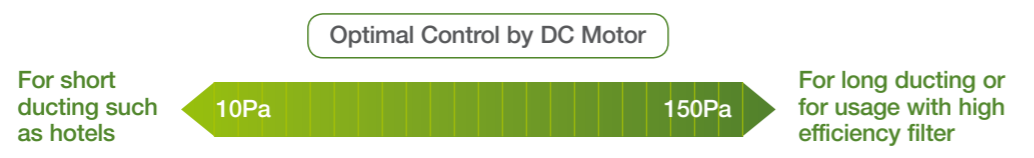

* Please refer technical databook for detail.



System example

An inspection port (450 mm x 450 mm or larger) is required at the lower side of the indoor unit body.

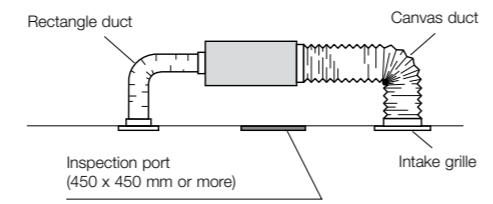


More powerful drain pump

Using a high-lift drain pump, drain piping can be elevated up to 702 mm from the base of the unit.

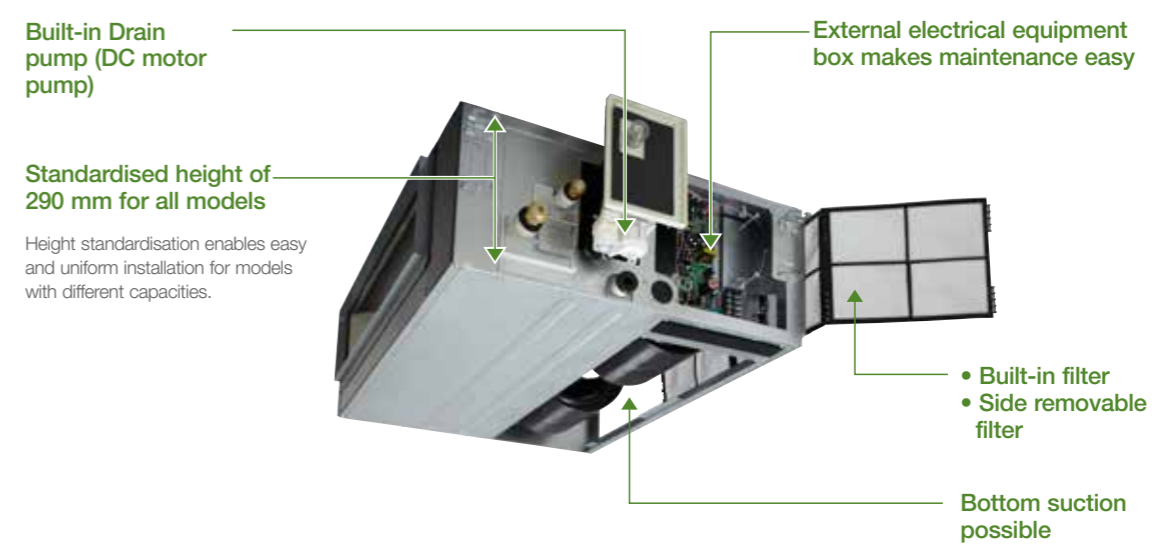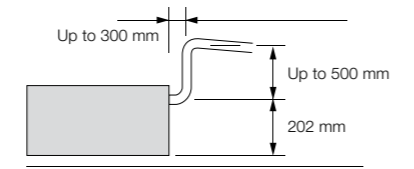

Discharge air temperature control

- Possible to control discharge air temperature for accurate room temperature control.
 - Possible to reduce cold drafts during heating operation.
- Before spec-in, please consult with an authorised Panasonic dealer.

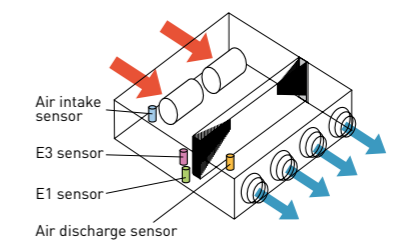

F2_{TYPE} Mid Static Ducted

Model Name	S-22MF2E5	S-28MF2E5	S-36MF2E5	S-45MF2E5	S-56MF2E5	S-60MF2E5	S-73MF2E5	S-90MF2E5	S-106MF2E5	S-140MF2E5	S-160MF2E5	
Power source	240V, 1 phase - 50Hz					240V, 1 phase - 50Hz						
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	6.0	7.3	9.0	10.6	14.0	16.0
	BTU/h	7,500	9,600	12,000	15,000	19,000	20,400	25,000	30,000	36,000	47,800	54,600
Heating capacity	kW	2.5	3.2	4.2	5.0	6.3	7.1	8.0	10.0	11.4	16.0	18.0
	BTU/h	8,500	11,000	14,000	17,000	21,000	24,200	27,000	34,000	39,000	54,600	61,500
Power input	Cooling kW	0.070	0.070	0.070	0.100	0.100	0.120	0.120	0.135	0.195	0.215	0.225
	Heating kW	0.070	0.070	0.070	0.100	0.100	0.120	0.120	0.135	0.200	0.210	0.225
Running amperes	Cooling A	0.56	0.56	0.56	0.71	0.71	0.87	0.87	0.95	1.27	1.39	1.47
	Heating A	0.56	0.56	0.56	0.71	0.71	0.87	0.87	0.95	1.29	1.38	1.46
Fan motor	Type	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Airflow rate (H/M/L) L/s	233/217/167	233/217/167	233/217/167	267/250/200	267/250/200	350/317/250	350/317/250	417/383/317	533/450/367	567/483/383	600/517/417
	Output kW	0.119	0.119	0.119	0.119	0.119	0.124	0.124	0.124	0.235	0.235	0.235
	External static pressure Pa	70(10-150)	70(10-150)	70(10-150)	70(10-150)	70(10-150)	70(10-150)	70(10-150)	70(10-150)	100(10-150)	100(10-150)	100(10-150)
Sound power level (H/M/L) dB(A)	55/51/47	55/51/47	55/51/47	56/54/50	56/54/50	57/54/48	57/54/48	59/56/50	60/56/53	61/57/54	62/58/55	
Sound pressure level (H/M/L) dB(A)	33/29/25	33/29/25	33/29/25	34/32/28	34/32/28	35/32/26	35/32/26	37/34/28	38/34/31	39/35/32	40/36/33	
Dimensions H x W x D mm	H x W x D	290x800x700	290x800x700	290x800x700	290x800x700	290x800x700	290x1,000x700	290x1,000x700	290x1,400x700	290x1,400x700	290x1,400x700	
	Liquid inches (mm)	1/4 (Ø6.35)	1/4 (Ø6.35)	1/4 (Ø6.35)	1/4 (Ø6.35)	1/4 (Ø6.35)	3/8 (Ø9.52)	3/8 (Ø9.52)	3/8 (Ø9.52)	3/8 (Ø9.52)	3/8 (Ø9.52)	
	Gas 410 A inches (mm)	1/2 (Ø12.7)	1/2 (Ø12.7)	1/2 (Ø12.7)	1/2 (Ø12.7)	1/2 (Ø12.7)	5/8 (Ø15.88)	5/8 (Ø15.88)	5/8 (Ø15.88)	5/8 (Ø15.88)	5/8 (Ø15.88)	
Pipe connections	Drain piping	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	
	kg	29	29	29	29	29	34	34	34	46	46	


GLOBAL REMARKS	Rated conditions:	
	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB
Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications subject to change without notice.

F2 TYPE MID STATIC DUCTED Dimensions


SIZE 22-56 MF2E5

- 1 Refrigerant piping joint (liquid tube) Ø6.35 Flare
- 2 Refrigerant piping joint (gas tube) Ø12.7 Flare
- 3 Upper drain port VP25 (O.D. Ø32 mm)
- 4 Bottom drain port VP25 (O.D. Ø32 mm)
- 5 Suspension lug (4-12 x 30 mm)
- 6 Power supply outlet
- 7 Fresh air intake port (Ø150 mm)
- 8 Flange for flexible air outlet duct
- 9 Electrical component box

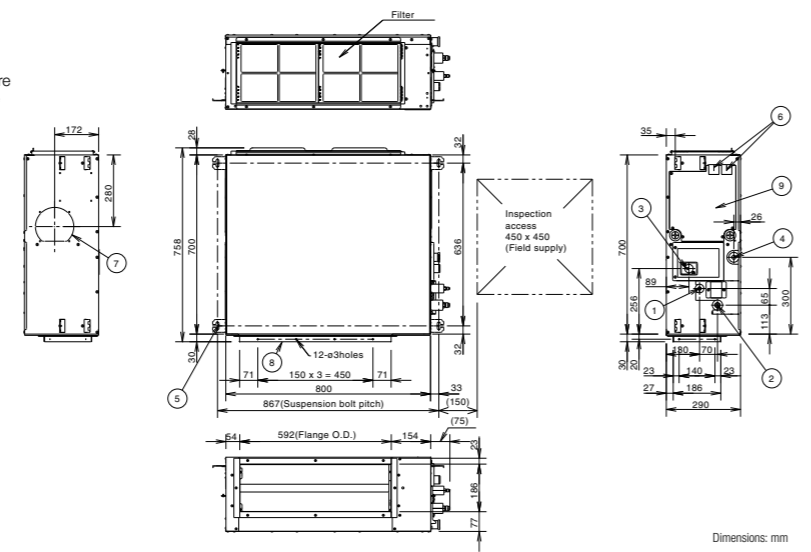


SIZE 60-90 MF2E5

- 1 Refrigerant piping joint (liquid tube) Ø9.52 Flare
- 2 Refrigerant piping joint (gas tube) Ø15.88 Flare
- 3 Upper drain port VP25 (O.D. Ø32 mm)
- 4 Bottom drain port VP25 (O.D. Ø32 mm)
- 5 Suspension lug (4-12 x 30 mm)
- 6 Power supply outlet
- 7 Fresh air intake port (Ø150 mm)
- 8 Flange for flexible air outlet duct
- 9 Electrical component box

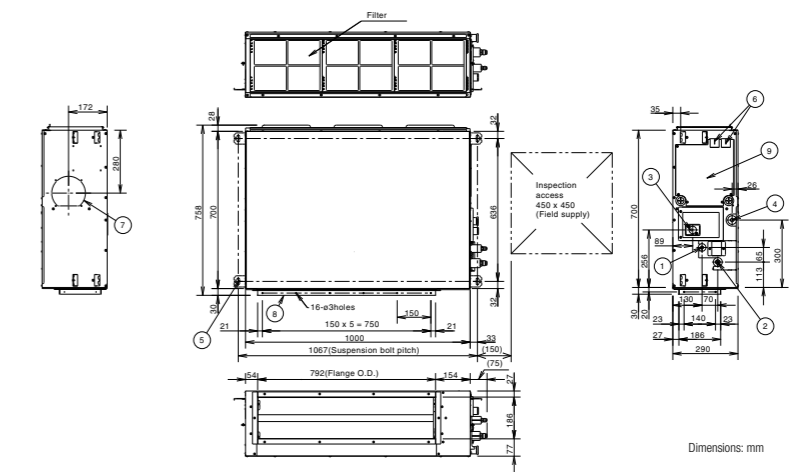

SIZE 106-160 MF2E5

- 1 Refrigerant piping joint (liquid tube) Ø9.52 Flare
- 2 Refrigerant piping joint (gas tube) Ø15.88 Flare
- 3 Upper drain port VP25 (O.D. Ø32 mm)
- 4 Bottom drain port VP25 (O.D. Ø32 mm)
- 5 Suspension lug (4-12 x 30 mm)
- 6 Power supply outlet
- 7 Fresh air intake port (Ø150 mm)
- 8 Flange for flexible air outlet duct
- 9 Electrical component box

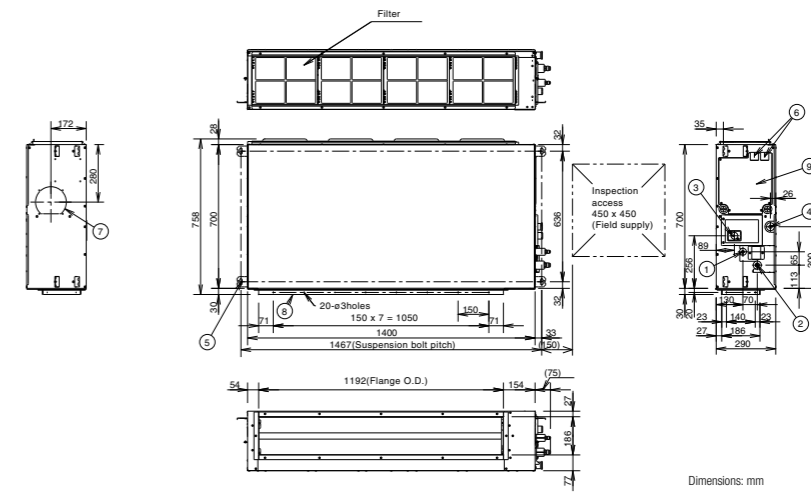

M1_{TYPE} Slim Low Static Ducted Concealed duct

The ultra slim M1 type is one of the leading products of its type in the industry. With a height of only 200 mm, it provides greater flexibility and adaptability for various applications. In addition, high efficiency and extreme low noise level make it highly suitable for hotels and small offices.



Technical focus

- Ultra-slim profile: 200 mm for all models
- DC fan motor greatly reduces power consumption
- Ideal for hotel application with very narrow false ceilings
- Anti-mould washable filters included
- Easy maintenance and service by external electrical box
- 40 Pa static pressure enables ductwork to be fitted.
- Includes drain pump


Ultra-slim profile for all models

200mm height for all models allows installation in very narrow ceilings.



Drain pump with increased power!

Using the built-in high-lift drain pump, the drain piping rise height can be increased to 653 mm from the lower surface of the body.

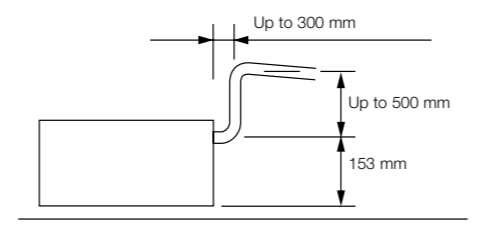


Model Name		S-22MM1E5	S-28MM1E5	S-36MM1E5	S-45MM1E5	S-56MM1E5	
Power source		240 V, 1 phase - 50Hz					
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	
	BTU/h	7,500	9,600	12,000	15,000	19,000	
Heating capacity	kW	2.5	3.2	4.2	5.0	6.3	
	BTU/h	8,500	11,000	14,000	17,000	21,000	
Power input	Cooling kW	0.036	0.040	0.042	0.049	0.064	
	Heating kW	0.026	0.030	0.032	0.039	0.054	
Running current	Cooling A	0.26	0.30	0.31	0.37	0.48	
	Heating A	0.23	0.27	0.28	0.34	0.45	
Fan	Type	Sirocco fan					
	Air flow rate (H/M/L)	L/s	133/117/100	142/125/108	150/133/117	175/158/133	208/192/167
	Motor output	kW	0.05	0.05	0.05	0.05	0.05
	External static pressure	Pa	10 (30)	15 (30)	15 (40)	15 (40)	15 (40)
	Sound power level (H/M/L)	dB	43/42/40	45/44/42	47/45/43	49/47/45	52/50/48
Sound pressure level (H/M/L)	dB(A)	28/27/25 (30/29/27)*	30/29/27 (32/31/29)*	32/30/28 (34/32/30)*	34/32/30 (36/34/32)*	35/33/31 (37/35/32)*	
Dimensions	H x W x D	mm	200 x 750 x 640				
	Liquid	inches (mm)	1/4 (Ø6.35)				
	Gas	inches (mm)	1/2 (Ø12.7)				
Pipe connections	Drain piping		VP-20				
	Net weight	kg	19				

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications subject to change without notice. * With booster cable.

M1 TYPE SLIM LOW STATIC DUCTED Dimensions

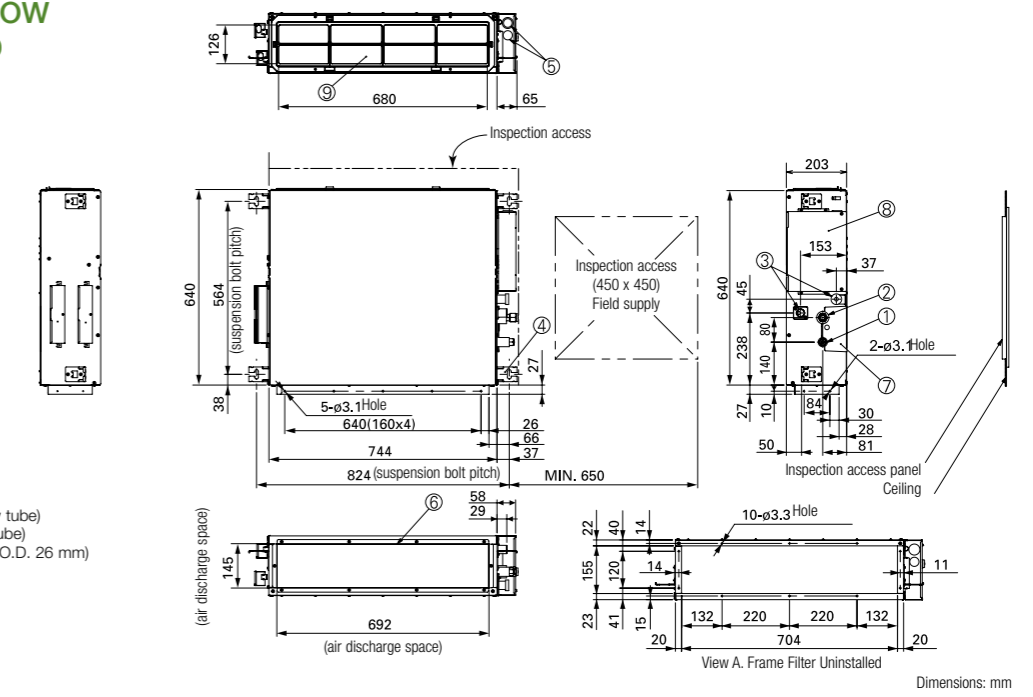

- 1 Refrigerant piping joint (narrow tube)
- 2 Refrigerant piping joint (wide tube)
- 3 Upper and bottom drain port (O.D. 26 mm)
- 4 Suspension lug
- 5 Power supply outlet (2- Ø30)
- 6 Flange for air intake duct
- 7 PI cover
- 8 Electrical component box
- 9 Frame filter

Z1 TYPE Slim Low Static Ducted Twenty Series

Concealed duct

NEW

The ultra slim Z1 type is one of the leading products of its type in the industry. With a height of only 200 mm, it provides greater flexibility and adaptability for various applications. In addition, high efficiency and extreme low noise level make it highly suitable for hotels and small offices.



S-22MZ1H4/ S-28MZ1H4/ S-36MZ1H4/ S-45MZ1H4/
S-56MZ1H4/ S-60MZ1H4



S-73MZ1H4



Self-diagnosing Function



Automatic Fan Operation



Mild dry



Automatic Restart Function

Technical focus

- Ultra-slim profile: 200 mm for all models
- DC fan motor greatly reduces power consumption
- Ideal for hotel application with very narrow false ceilings
- Anti-mould washable filters included
- Easy maintenance and service by external electrical box
- 29 Pa static pressure enables ductwork to be fitted.
- Drain pump (optional)

Ultra-slim profile for all models

200mm height for all models allows installation in very narrow ceilings.



Drain pump with increased power! (optional)

Using the optional high-lift drain pump, the drain piping rise height can be increased to 700 mm from the drain pipe port.



CZ-73DMZ1

Model Name		S-22MZ1H4	S-28MZ1H4	S-36MZ1H4	S-45MZ1H4	S-56MZ1H4	S-60MZ1H4	S-73MZ1H4
Power source		240 V, 1 phase - 50 Hz						
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	6.0	7.3
	BTU/h	7,500	9,600	12,000	15,000	19,000	20,400	25,000
Heating capacity	kW	2.5	3.2	4.2	5.0	6.3	7.1	8.0
	BTU/h	8,500	11,000	14,000	17,000	21,000	24,200	27,000
Power input	Cooling kW							
	Heating kW							
Running current	Cooling A							
	Heating A							
Fan	Type							
	Air flow rate (H/M/L) L/s							
	Motor output kW							
	External static pressure Pa	15 (0-29)	15 (0-29)	15 (0-29)	15 (0-29)	15 (0-29)	15 (0-29)	15 (0-29)
Sound power level (H/M/L) dB								
Sound pressure level (H/M/L) dB(A)								
Dimensions H x W x D mm		200x900x550	200x900x550	200x900x550	200x900x550	200x900x550	200x900x550	200x1,047x550
	Liquid mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
Pipe connections Gas mm (inches)		Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
	Drain piping							
Net weight kg								


TO BE INFORMED

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB


Specifications subject to change without notice.

Z1 TYPE SLIM LOW STATIC DUCTED TWENTY SERIES Dimensions

SIZE 22-60MZ1H4

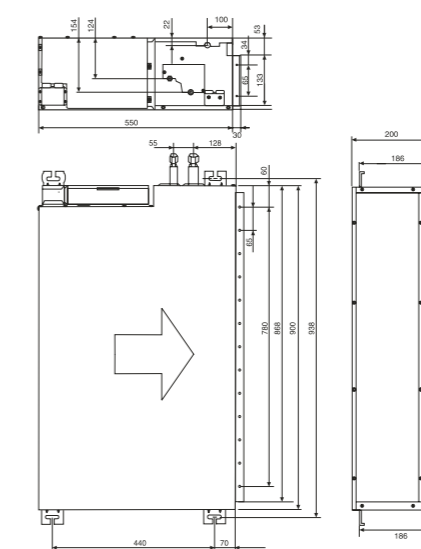

SIZE 73MZ1H4

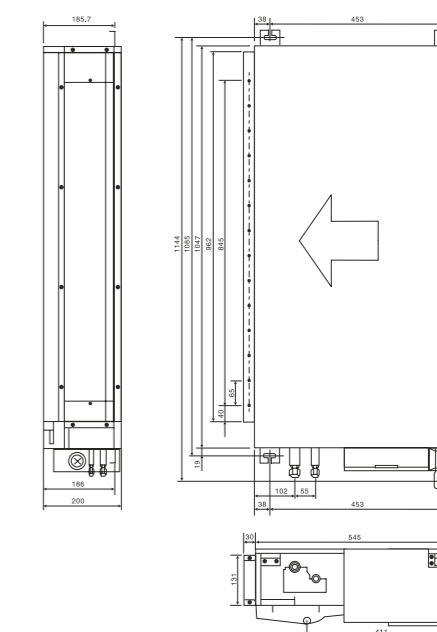

- 1 Refrigerant piping joint (narrow tube)
- 2 Refrigerant piping joint (wide tube)
- 3 Upper and bottom drain port (O.D. 26 mm)
- 4 Suspension lug
- 5 Power supply outlet (2- Ø30)
- 6 Flange for air intake duct
- 7 PI cover
- 8 Electrical component box
- 9 Frame filter

E1 TYPE High Static Ducted

Concealed duct high-static pressure

The E1 range of ducted units offers improved design flexibility for extended duct layouts as a result of their increased external static pressures.



S-73ME1E5 / S-106ME1E5 / S-140ME1E5



S-224ME1E5 / S-280ME1E5



Self-diagnosing Function



Automatic Fan Operation



Mild dry




Automatic Restart Function

Technical focus

- Complete flexibility for ductwork design
- Can be located into a weatherproof housing for external installation
- Discharge air temperature control to reduce cold drafts during heating operation
- Configurable air temperature control

System example

An inspection port (450 x 450 mm or more) is required at the lower side of the indoor unit body (field supply).

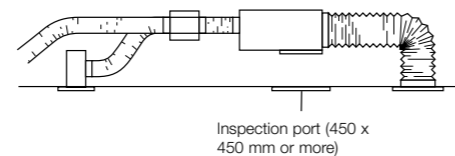


Rap valve kit CZ-P160RVK2 (For heating operation only)

The types 224 and 280 require two rap valve kits for each unit for heating operation. (not required for cooling only design project and 1:1 installation)
The rap valve kit greatly improves the energy efficiency of the system.



Discharge air temperature control

- Able to control discharge air temperature for accurate room temperature control.
- Possible to reduce cold drafts during heating operation.

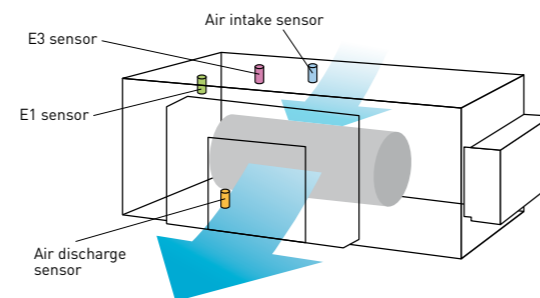

Model Name		S-73ME1E5	S-106ME1E5	S-140ME1E5	S-224ME1E5	S-280ME1E5	
Power source		240 V, 1 phase - 50Hz					
Cooling capacity	kW	7.3	10.6	14.0	22.4	28.0	
	BTU/h	25,000	36,000	47,800	76,400	95,500	
Heating capacity	kW	8.0	11.4	16.0	25.0	31.5	
	BTU/h	27,000	39,000	54,600	85,300	107,500	
Power input	Cooling kW	0.530	0.570	0.710	0.930	1.390	
	Heating kW	0.530	0.570	0.710	0.930	1.390	
Running current	Cooling A	2.31	2.47	3.00	4.07	6.07	
	Heating A	2.31	2.47	3.00	4.07	6.07	
Fan	Type	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	
	Air flow rate (H/M/L)	L/s	383/367/350	500/467/417	600/583/550	933/886/828	1200/1167/1100
	Motor output	kW	0.2	0.2	0.35	0.2	0.4
	External static pressure	Pa	186	176	167	176	216 (235)*
Sound power level (H/M/L)	dB	55/54/53	56/55/53	58/57/55	59/58/57	62/61/60	
Sound pressure level (H/M/L)	dB(A)	44/43/42	45/44/42	47/46/44	48/47/46	51/50/49 (52/51/50)*	
Dimensions	H x W x D	mm	420 x 1,065 x 620	420 x 1,065 x 620	450 x 1,065 x 620	467 x 1,428 x 1,230	467 x 1,428 x 1,230
	Liquid	inches (mm)	3/8 (Ø9.52)	3/8 (Ø9.52)	3/8 (Ø9.52)	3/8 (Ø9.52)	3/8 (Ø9.52)
Pipe connections	Gas	inches (mm)	5/8 (Ø15.88)	5/8 (Ø15.88)	5/8 (Ø15.88)	3/4 (Ø19.05)	7/8 (Ø22.22)
	Drain piping		VP-25	VP-25	VP-25	VP-25	VP-25
Net weight	kg	47	50	54	110	120	


GLOBAL REMARKS	Rated conditions:		Cooling	Heating
	Indoor air temperature		27°C DB / 19°C WB	20°C DB
	Outdoor air temperature		35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications subject to change without notice. *via jumper setting

E1 TYPE HIGH STATIC DUCTED Dimensions


SIZE 73-140

- 1 Refrigerant liquid line (ø9.52)
- 2 Refrigerant gas line (ø15.88)
- 3 Power supply entry
- 4 Drain connection (20A / VP25)
- 5 Duct connection for suction
- 6 Duct connection for discharge

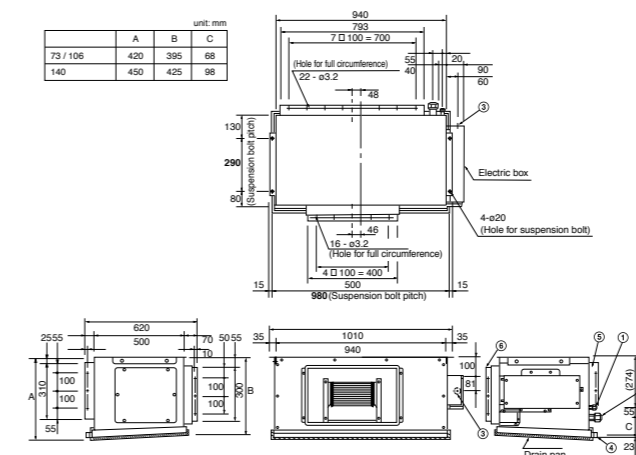

SIZE 224-280

- 1 Refrigerant piping (liquid pipes) Ø9.52
- 2 Refrigerant piping (gas pipes) 76 type: Ø19.05, 96 type: Ø22.22
- 3 Power supply outlet (Ø25 grommet, rubber)
- 4 Power supply outlet (spare) (Ø30 knock-out)
- 5 Drain port 25 A, male thread
- 6 Duct connection for suction
- 7 Duct connection for discharge

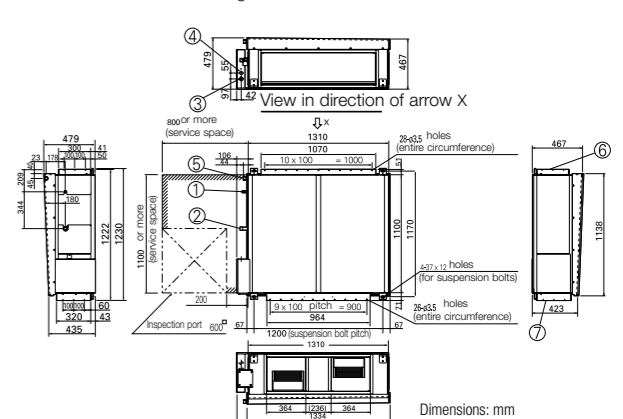

T1 TYPE Ceiling

Ceiling mounted

The T1 type ceiling mounted unit features a DC fan motor for increased efficiency and reduced operating sound levels. All units have the same height and depth for a uniform appearance in mixed installations. It also features a fresh air knockout for improved air quality.




Technical focus

- Low sound levels
- Standardised height and depth for all models
- Long and wide air distribution
- Easy to install and maintain
- Fresh air knockout


Further comfort improvement

The wide air discharge opening widens the air flow to the left and the right, so that a comfortable temperature is obtained in the entire room.




Further comfort improvement with airflow distribution

The unpleasant feeling caused when the air flow directly hits the human body is prevented by "Draft prevention mode", which changes the swing width, so that comfort is increased.



Auto flap control

Air distribution is automatically adjusted depending on the operational mode of the unit.



Model Name		S-36MT1E5	S-45MT1E5	S-56MT1E5	S-73MT1E5	S-106MT1E5	S-140MT1E5
Power source		240 V, 1 phase - 50Hz					
Cooling capacity	kW	3.6	4.5	5.6	7.3	10.6	14.0
	BTU/h	12,000	15,000	19,000	25,000	36,000	47,800
Heating capacity	kW	4.2	5.0	6.3	8.0	11.4	16.0
	BTU/h	14,000	17,000	21,000	27,000	39,000	54,600
Power input	Cooling kW	0.029	0.029	0.032	0.044	0.075	0.088
	Heating kW	0.029	0.029	0.032	0.043	0.074	0.086
Running current	Cooling A	0.23	0.23	0.24	0.33	0.53	0.60
	Heating A	0.23	0.23	0.25	0.34	0.55	0.62
Fan	Type	Sirocco fan					
	Air flow rate (H/M/L) L/s	200/167/150	217/183/150	217/183/150	306/250/233	458/383/333	500/433/367
	Motor output kW	0.03	0.03	0.03	0.04	0.08	0.08
Sound power level (H/M/L)	dB	46/43/41	47/44/41	47/44/41	49/47/44	52/49/46	54/51/48
Sound pressure level (H/M/L)	dB(A)	35/32/30	36/33/30	36/33/30	38/36/33	41/38/35	43/40/37
Dimensions	H x W x D mm	210 x 910 x 680	210 x 910 x 680	210 x 910 x 680	210 x 1,180 x 680	210 x 1,595 x 680	210 x 1,595 x 680
	Liquid inches (mm)	1/4 (Ø6.35)	1/4 (Ø6.35)	1/4 (Ø6.35)	3/8 (Ø9.52)	3/8 (Ø9.52)	3/8 (Ø9.52)
Pipe connections	Gas inches (mm)	1/2 (Ø12.7)	1/2 (Ø12.7)	1/2 (Ø12.7)	5/8 (Ø15.88)	5/8 (Ø15.88)	5/8 (Ø15.88)
	Drain piping	VP-20	VP-20	VP-20	VP-20	VP-20	VP-20
Net weight	kg	21	21	21	25	33	33

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB


Specifications subject to change without notice.

T1 TYPE CEILING Dimensions

- 1 Drain port VP20 (inner Ø26, hose accessory)
- 2 Drain for left piping
- 3 Upper piping outlet port (knock-out hole)
- 4 Right piping outlet port (knock-out hole)
- 5 Drain left piping outlet port (knock-out hole)
- 6 Power supply entry port (knock-out hole Ø40)
- 7 Remote controller wiring inlet port
- 8 Wireless remote control receiver mounting part

	36-56 type	73 type	106-140 type
A (body)	910	1,180	1,595
B (suspension bolt pitch)	855	1,125	1,540

- 9 Refrigerant gas piping
Size 36-56: Ø12.7
Size 73-140: Ø15.88
- 10 Refrigerant liquid piping
Size 36-56: Ø6.35
Size 73-140: Ø9.52

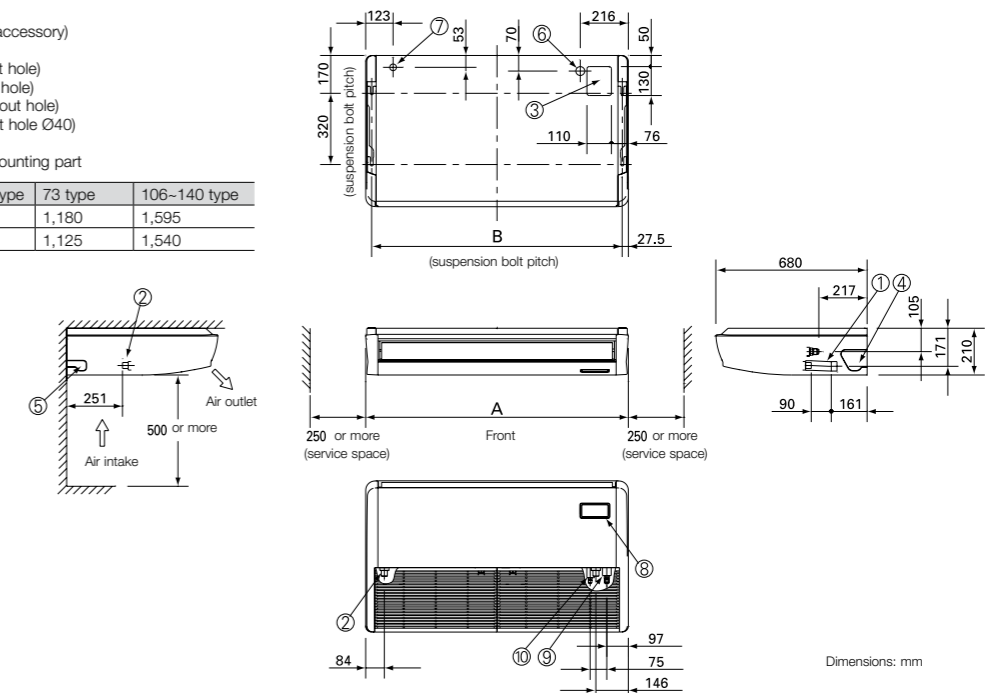

Dimensions: mm

K2 TYPE K1 TYPE Wall Mounted

The K2/K1 type wall mounted unit has a stylish smooth design with a washable front panel. Small, lightweight and low noise level makes it ideal for small offices and other commercial applications.

NEW



S-22MK2E5 / S-28MK2E5 / S-36MK2E5



S-45MK1E5 / S-56MK1E5 / S-73MK1E5 / S-106MK1E5



Self-diagnosing Function



Automatic Fan Operation



Mild dry



Intelligent Auto Swing



Automatic Restart Function



Auto Swing (Auto Flap Control)

Technical focus

- Closed discharge port when not in use
- Lighter and smaller units make installation easy
- Quiet operation
- Smooth and durable design
- Piping outlet in six directions
- Washable front panel
- Air distribution is automatically altered depending on the operational mode of the unit
- Anti-mould washable filters are included

Noise reducing external valve kit

To reduce noise level of expansion valve.
(Optional accessory)




CZ-P56SVK2 (for 22 - 56 type)
CZ-P160SVK2 (for 73 - 106 type)

Closed discharge port

When the unit is turned off, the flap closes completely to prevent entry of dust into the unit and to keep the equipment clean.

Compact indoor units make the installation easy

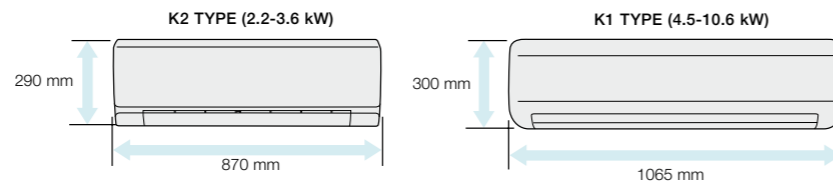

Quiet operation

Low operating noise level makes these units ideal for hotels and hospital applications.

Smooth and durable design

The smooth cover means these units match most modern interiors. Their compact size enables them to blend in, even in small spaces.

Piping outlet in six directions

Piping outlet is possible in the six directions of right, right rear, right bottom, left, left rear, left bottom, making installation easier.


Washable front panel

The indoor unit's front panel can be easily removed and washed for trouble-free maintenance.



Air distribution is automatically adjusted depending on the operational mode of the unit

Air outlet angle is automatically adjusted for cooling and heating operation.



K2_{TYPE}
K1_{TYPE} Wall Mounted






Model Name	S-22MK2E5	S-28MK2E5	S-36MK2E5	S-45MK1E5	S-56MK1E5	S-73MK1E5	S-106MK1E5	
Power source	240 V, 1 phase - 50 Hz				240 V, 1 phase - 50 Hz			
Cooling capacity	kW	2.20	2.80	3.60	4.5	5.6	7.3	10.6
	BTU/h	7,500	9,600	12,300	15,000	19,000	25,000	36,000
Heating capacity	kW	2.50	3.20	4.20	5.0	6.3	8.0	11.4
	BTU/h	8,500	10,900	14,300	17,000	21,000	27,000	39,000
Power input	Cooling kW	0.25	0.25	0.30	0.021	0.030	0.057	0.060
	Heating kW	0.25	0.25	0.30	0.021	0.030	0.057	0.068
Running current	Cooling A	0.21	0.23	0.25	0.23	0.32	0.52	0.55
	Heating A	0.21	0.23	0.25	0.23	0.32	0.52	0.62
Fan	Type	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L) m³/h	150/125/108	158/139/108	182/150/108	200/175/142	233/200/175	300/242/192	317/275/217
	Motor output kW	0.03	0.03	0.03	0.047	0.047	0.047	0.047
Sound power level (H/M/L) dB	51/48/44	52/49/44	55/51/44	49/45/41	58/55/51	58/55/51	60/56/53	
Sound pressure level (H/M/L) dB(A)	36/33/29	37/34/29	40/36/29	38/34/30	40/36/32	47/44/40	49/45/42	
Dimensions H x W x D mm		290 x 870 x 214	290 x 870 x 214	290 x 870 x 214	300 x 1,065 x 230	300 x 1,065 x 230	300 x 1,065 x 230	
	Liquid mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	
Pipe connections mm (inches)	Gas	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	
	Drain piping	Ø16	Ø16	Ø16	Ø18	Ø18	Ø18	
Net weight kg	9	9	9	13	13	14.5	14.5	

GLOBAL REMARKS	Rated conditions:		Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB	
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB	



Specifications subject to change without notice.

K2 TYPE WALL MOUNTED Dimensions

S-22MK2E5 / S-28MK2E5 / S-36MK2E5

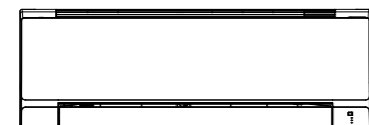





- 1 Refrigerant tubing (liquid tube) ø6.35(flared)
- 2 Refrigerant tubing (gas tube) ø12.7(flared)
- 3 Drain hose (outer dia. ø16)
- 4 Rear panel (PL BACK)
- 5 Rear panel fixing holes (ø5 holes or 5X13 oval holes)
- 6 Tubing and wiring holes (ø70)

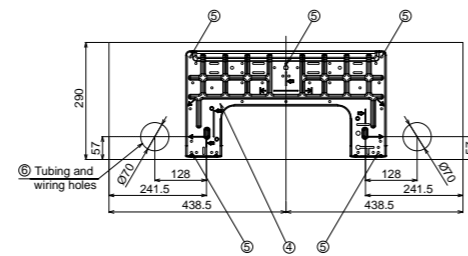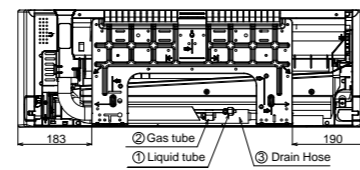



Dimensions: mm

K1 TYPE WALL MOUNTED Dimensions

S-45MK1E5 / 56MK1E5 / 73MK1E5 / 106MK1E5

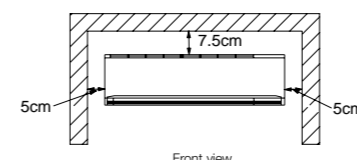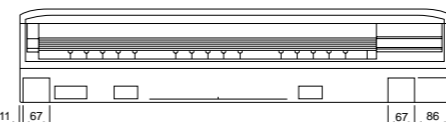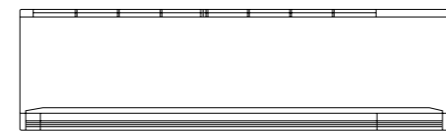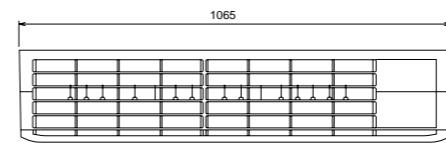

- 1 Refrigerant piping (liquid tube) 45-56 / 73-106 type ø6.35 / ø9.52 (flared)
- 2 Refrigerant piping (gas tube) 45-56 / 73-106 type ø12.7 / ø15.88 (flared)
- 3 Drain hose VP13 (outer dia. ø18)
- 4 Rear panel (PL BACK)
- 5 Tubing and wiring holes (ø80)

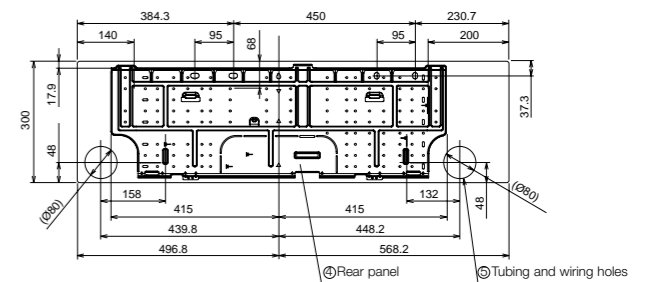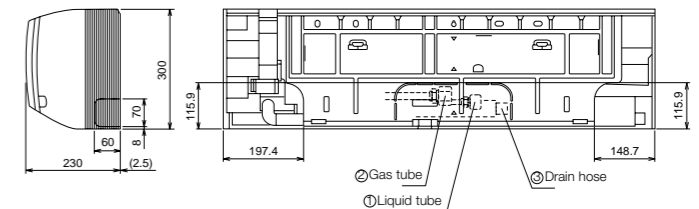

Dimensions: mm

P1 TYPE Floor Standing


The compact floor standing P1 units are the ideal solution for providing perimeter air conditioning. A standard wired controller can be incorporated into the body of the unit.




Technical focus

- Pipes can be connected to either side of the unit from the bottom or rear
- Easy to install
- Front panel opens fully for easy maintenance
- Removable air discharge grille gives flexible air flow

Effective perimeter air conditioning

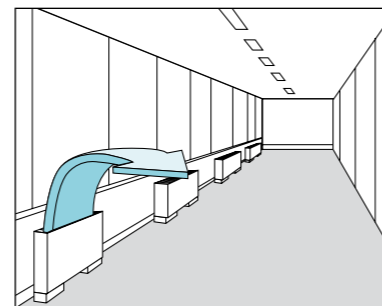

A standard wired remote control can be installed in the body

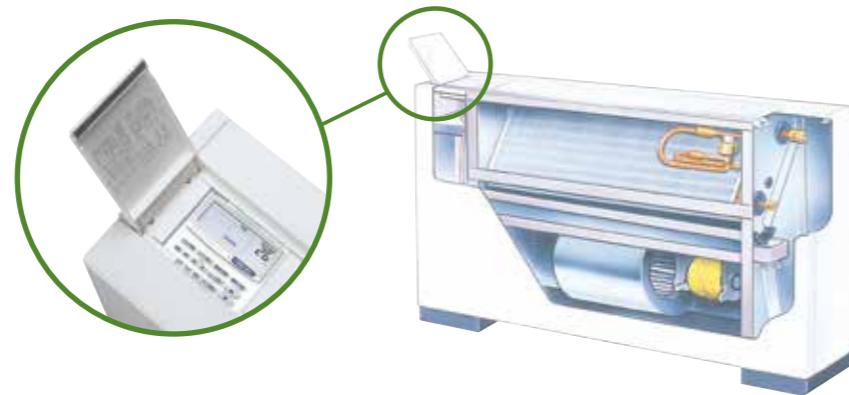


Model Name		S-22MP1E5	S-28MP1E5	S-36MP1E5	S-45MP1E5	S-56MP1E5	S-71MP1E5
Power source		240 V, 1 phase - 50Hz					
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1
	BTU/h	7,500	9,600	12,000	15,000	19,000	24,000
Heating capacity	kW	2.5	3.2	4.2	5.0	6.3	8.0
	BTU/h	8,500	11,000	14,000	17,000	21,000	27,000
Power input	Cooling kW	0.061	0.061	0.091	0.136	0.136	0.170
	Heating kW	0.045	0.045	0.076	0.101	0.101	0.130
Running current	Cooling A	0.26	0.26	0.39	0.58	0.58	0.73
	Heating A	0.19	0.19	0.32	0.43	0.43	0.56
Fan	Type	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L) L/s	117/100/83	117/100/83	150/117/100	200/150/133	250/217/183	283/233/200
	Motor output kW	0.01	0.01	0.02	0.02	0.03	0.06
Sound power level (H/M/L)	dB	44/41/39	44/41/39	50/46/40	49/46/42	50/47/42	52/49/46
Sound pressure level (H/M/L)	dB(A)	33/30/28	33/30/28	39/35/29	38/35/31	39/36/31	41/38/35
Dimensions	H x W x D mm	615 x 1,065 x 230	615 x 1,065 x 230	615 x 1,065 x 230	615 x 1,380 x 230	615 x 1,380 x 230	615 x 1,380 x 230
	Liquid inches (mm)	1/4 (Ø6.35)	1/4 (Ø6.35)	1/4 (Ø6.35)	1/4 (Ø6.35)	1/4 (Ø6.35)	3/8 (Ø9.52)
Pipe connections	Gas inches (mm)	1/2 (Ø12.7)	1/2 (Ø12.7)	1/2 (Ø12.7)	1/2 (Ø12.7)	1/2 (Ø12.7)	5/8 (Ø15.88)
	Drain piping	VP-20	VP-20	VP-20	VP-20	VP-20	VP-20
Net weight	kg	29	29	29	39	39	39

GLOBAL REMARKS	Rated conditions:		Specifications subject to change without notice.	
	Cooling	Heating		
	Indoor air temperature	27°C DB / 19°C WB	20°C DB	
Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB		

P1 TYPE FLOOR STANDING Dimensions

- 1 4 x Ø12 holes (for floor fixing)
- 2 Power supply outlet
- 3 Air filter
- 4 Refrigerant piping (liquid pipes)
- 5 Refrigerant piping (gas pipes)
- 6 Level adjustment bolt
- 7 Drain outlet VP20 (with vinyl hose)
- 8 Refrigerant piping connection port (bottom or rear)
- 9 Operation switch (remote controller RCS-SH80AG) mounting part
- 10 Electric equipment box
- 11 Accessory copper pipe for gas pipe connection

Indoor unit	A	B	C	Liquid pipes	Gas pipes
22 to 36 type	1,065	665	632	Ø6.35	Ø12.7
45 type					
56 type	1,380	980	947	Ø9.52	Ø15.88
71 type					

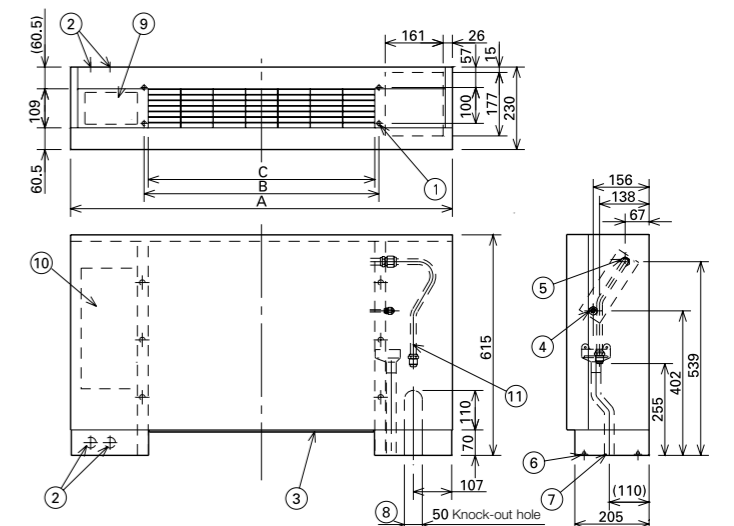

Dimensions: mm

R1 TYPE Concealed Floor Standing


At just 229 mm deep, the R1 unit can be easily concealed in perimeter areas to provide powerful and effective air conditioning.



Technical focus

- Chassis unit for discrete customisable installation
- Complete with removable filters
- Pipes can be connected to the unit either from the bottom or rear
- Easy to install

Perimeter air conditioning with high interior quality

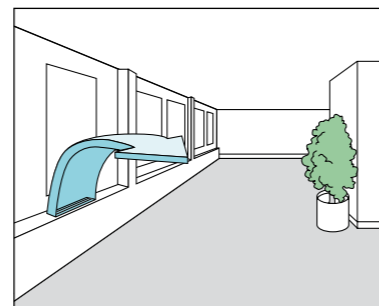


Model Name		S-22MR1E5	S-28MR1E5	S-36MR1E5	S-45MR1E5	S-56MR1E5	S-71MR1E5
Power source		240 V, 1 phase - 50Hz					
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1
	BTU/h	7,500	9,600	12,000	15,000	19,000	24,000
Heating capacity	kW	2.5	3.2	4.2	5.0	6.3	8.0
	BTU/h	8,500	11,000	14,000	17,000	21,000	27,000
Power input	Cooling kW	0.061	0.061	0.091	0.136	0.136	0.170
	Heating kW	0.045	0.045	0.076	0.101	0.101	0.130
Running current	Cooling A	0.26	0.26	0.39	0.58	0.58	0.73
	Heating A	0.19	0.19	0.32	0.43	0.43	0.56
Fan	Type	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L) L/s	117/100/83	117/100/83	150/117/100	200/150/133	250/217/183	283/233/200
	Motor output kW	0.01	0.01	0.02	0.02	0.03	0.06
Sound power level (H/M/L)	dB	44/41/39	44/41/39	50/46/40	49/46/42	49/46/42	52/49/46
Sound pressure level (H/M/L)	dB(A)	33/30/28	33/30/28	39/35/29	38/35/31	39/36/31	41/38/35
Dimensions	H x W x D mm	616 x 904 x 229	616 x 904 x 229	616 x 904 x 229	616 x 1,219 x 229	616 x 1,219 x 229	616 x 1,219 x 229
	Liquid inches (mm)	1/4 (Ø6.35)	1/4 (Ø6.35)	1/4 (Ø6.35)	1/4 (Ø6.35)	1/4 (Ø6.35)	3/8 (Ø9.52)
Pipe connections	Gas 410 A inches (mm)	1/2 (Ø12.7)	1/2 (Ø12.7)	1/2 (Ø12.7)	1/2 (Ø12.7)	1/2 (Ø12.7)	5/8 (Ø15.88)
	Drain piping	VP-20	VP-20	VP-20	VP-20	VP-20	VP-20
Net weight	kg	21	21	21	28	28	28

GLOBAL REMARKS	Rated conditions:		Cooling	Heating	Specifications subject to change without notice.
	Indoor air temperature		27°C DB / 19°C WB	20°C DB	
	Outdoor air temperature		35°C DB / 24°C WB	7°C DB / 6°C WB	

R1 TYPE CONCEALED FLOOR STANDING Dimensions



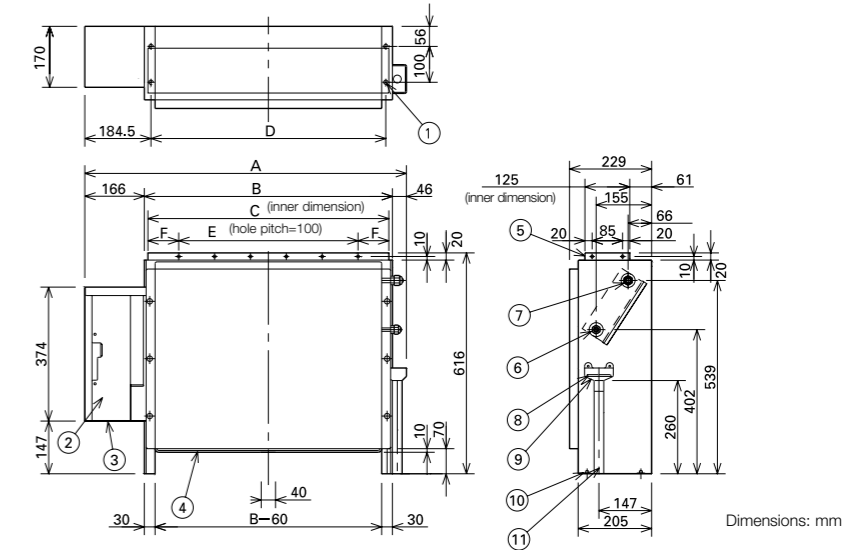












- 1 4 x Ø12 holes (for floor fixing)
- 2 Electric equipment box
- 3 Power supply outlet
- 4 Air filter
- 5 Discharge duct connection flange
- 6 Refrigerant connection outlet (liquid pipes)
- 7 Refrigerant connection outlet (gas pipes)
- 8 Drain filter
- 9 Drain pan
- 10 Level adjustment bolt
- 11 Drain outlet VP20 (with vinyl hose)



Indoor unit	A	B	C	D	E	F	Liquid pipes	Gas pipes
22 to 36 type	904	692	672	665	500	86	Ø6.35	Ø12.7
45 type								
56 type	1,219	1,007	1,002	980	900	51	Ø9.52	Ø15.88
71 type								

FSV Controllers

A wide variety of control options to meet the requirements of different applications.


OPERATION SYSTEM	INDIVIDUAL CONTROL SYSTEMS				TIMER OPERATION	CENTRALISED CONTROL SYSTEMS			BMS System PC Base	Connection with 3rd Party Controller
Requirements	Normal operation	Operation from anywhere in the room	Quick and easy operation		Daily and weekly program	Operation with various functions from a central location	Only ON/OFF operation from a central location	Simplified load distribution ratio (LDR) for each tenant Touch screen panel		
External appearance									P-AIMS Software Up to 1024 units  CZ-CSWKC2	Seri-Para I/O unit for outdoor unit  CZ-CAPDC2
Type, model name	Timer Remote Controller (Wired) CZ-RTC2	Wireless Remote Controller CZ-RWSU2 CZ-RWSC2 CZ-RWSY2 CZ-RWST2 CZ-RWSL2 CZ-RWSK2	Simplified Remote Controller CZ-RE2C2	Backlit remote controller CZ-RELC2	Schedule Timer CZ-ESWC2	System Controller CZ-64ESMC2	ON/OFF Controller CZ-ANC2	Intelligent Controller CZ-256ESMC2 (CZ-CFUNC2)	Optional software  CZ-CSWAC2 for Load distribution CZ-CSWWC2 for Web application CZ-CSWGC2 for Object layout display CZ-CSWBC2 for BAC net software interface *PC required (field supply)	Interface Adaptor  CZ-CAPC2
Built-in Thermostat	●	●	●	—	—	—	—	—		
Number of indoor units which can be controlled	1 group, 8 units	1 group, 8 units	1 group, 8 units		64 groups, max. 64 units	64 groups, max. 64 units	16 groups, max. 64 units	64 units x 4 systems, max. 256 units		Seri-Para I/O unit for each indoor unit  CZ-CAPBC2
Use limitations	· Up to 2 controllers can be connected per group.	· Up to 2 controllers can be connected per group.	· Up to 2 controllers can be connected per group.	—	· Required power supply from the system controller · When there is no system controller, connection is possible to the T10 terminal of an indoor unit.	· Up to 10 controllers, can be connected to one system. · Main unit/sub unit (1 main unit + 1 sub unit) connection is possible. · Use without remote controller is possible.	· Up to 8 controllers (4 main units + 4 sub units) can be connected to one system. · Use without remote controller is impossible.	· A communication adaptor (CZ-CFUNC2) must be installed for three or more systems.		Communication Adaptor  CZ-CFUNC2
Function ON/OFF	●	●	●	—	—	●	●	●		
Mode setting	●	●	●	—	—	●	—	●		
Fan speed setting	●	●	●	—	—	●	—	●		
Temperature setting	●	●	●	—	—	●	—	●		
Air flow direction	●	●	●	—	—	● ¹	—	● ¹		
Permit/Prohibit switching	—	—	—	—	—	●	●	●		
Weekly program	●	—	—	—	●	—	—	●		LonWorks Interface  CZ-CLNC2

1. Setting is not possible when a remote control unit is present. (Use the remote control for setting.)
All specifications subject to change without notice.

Individual Control Systems

Control contents	Part name, model No.	Quantity
Standard Control <ul style="list-style-type: none"> Control of the various operations of the indoor unit by wired or wireless remote controller. Cooling or heating mode of the outdoor unit is decided by the first priority of the remote controller. Switching between remote controller sensor and body sensor is possible. 	Timer remote controller CZ-RTC2 Simplified remote controller CZ-RE2C2 Wireless remote controller CZ-RWSY2 / CZ-RWSU2 / CZ-RWSL2 / CZ-RWSC2 / CZ-RWSK2 / CZ-RWST2	1 unit each
(1) Group control <ul style="list-style-type: none"> Batch remote control on all indoor units. Operation of all indoor units in the same mode. Up to 8 units can be connected. The sensor is the body sensor, and thermostat ON/OFF setting in regard to the temperature set by the remote controller is possible for each indoor unit. 	Timer remote controller CZ-RTC2 Simplified remote controller CZ-RE2C2 Wireless remote controller CZ-RWSU2 / CZ-RWSC2	1 unit
(2) Main/sub remote control <ul style="list-style-type: none"> Max 2 remote controllers per indoor unit. (Main remote controller can be connected) The button pressed last has priority. Timer setting is possible even with the sub remote controller. 	Main or sub Timer remote controller CZ-RTC2 Simplified remote controller CZ-RE2C2 Wireless remote controller CZ-RWSY2 / CZ-RWSU2 / CZ-RWSL2 / CZ-RWSC2 / CZ-RWSK2 / CZ-RWST2	As required

SYSTEM EXAMPLE FSV

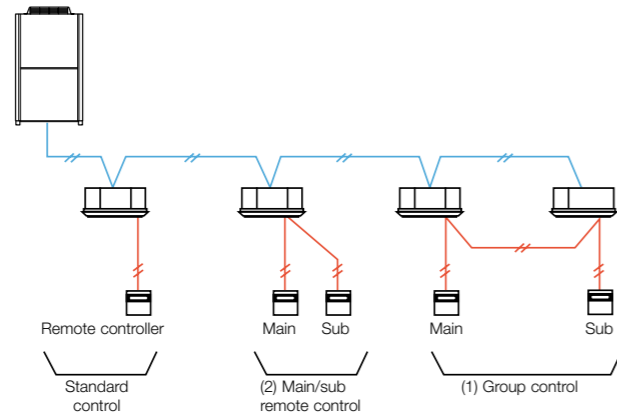

Timer remote controller (CZ-RTC2)



Dimensions
H 120 x W 120 x
D 16 mm

Basic remote controller ON/OFF

- Operation mode changeover (Cooling, Heating, Dry, Auto, Fan).
- Temperature setting (Cooling/Dry: 18-30 deg Heating: 16-30 deg).
- Fan speed setting H/ M/ L and Auto.
- Air flow direction adjustment.

Time Function 24 hours real time clock

- Day of the week indicator.

Weekly Program Function

- A maximum of 6 settings/day and 42 settings/week can be programmed.

Outing Function

- This function can prevent the room temperature from dropping or rising when the occupants are out for a long time.

Sleeping Function

- This function controls the room temperature for comfortable sleeping.

Max. 8 indoor units can be controlled from one remote controller

Remote control by main remote controller and sub controller is possible

Max. 2 remote controllers (main remote controller and sub controller) can be installed for one indoor unit.

Built-in temperature sensor

Wireless remote controller



Remote control by main remote controller and sub controller is possible

- Max. 2 remote controllers (main remote controller and sub controller) can be installed for one indoor unit.

When CZ-RWSC2 is used, wireless control becomes possible for all indoor units

- When a separate receiver is set up in a different room, control from that room also becomes possible.
- Automatic operation by means of the emergency operation button is possible even when the remote controller has been lost or the batteries have been exhausted.

In addition, there are other functions such as temperature setting, operation switching, airflow direction/fan speed setting, etc

Ventilation independent operation is possible

When commercial ventilation fans or heat-exchange ventilation fans have been installed, they can be operated with this remote control (interlocked operation with the indoor unit or independent ventilation ON/OFF).

Simplified remote controller (CZ-RE2C2)



Dimensions
H 120 x W 70 x D 17 mm

A remote controller with simple functions and basic operation

- Suitable for open rooms or hotels where detailed functions are not required.
- ON/OFF, operation mode switching, temperature setting, airflow velocity switching, airflow direction setting, alarm display, and remote controller self-diagnosis can be performed.
- Batch group control for up to 8 indoor units.
- Remote control by main remote controller and sub controller is possible with a simplified remote controller or a wired remote controller (up to two units).
- Built-in temperature sensor

Backlit remote controller [CZ-RELC2]



Dimensions
H 120 x W 70 x D 16 mm

Backlit remote controller with simple and friendly operation

- LCD backlight display.
- ON/OFF, operation mode switching, temperature setting, airflow velocity switching, airflow direction setting, alarm display, and remote controller self diagnosis can be performed.
- Built-in temp sensor.
- Batch group control for up to 8 indoor units.

Timer Operation

Schedule timer (CZ-ESWC2)



Dimensions
H 120 x W 120 x D 16 mm

- A function for pausing the timer in case of national holidays has been added, and timer operation also can be stopped for a long time

- By setting holidays or operation stop within one week, the timer can be paused just for that week.
- All timer settings can be stopped with the timer "ON/OFF effective" button. (Return to timer operation is made by pressing the button again.)

The power supply for the schedule timer is taken from one of the following.

1. Control circuit board (T10) of a nearby indoor unit (power supply wiring length: within 200m from the indoor unit).
2. System controller (power supply wiring length: within 100 m from the indoor unit).

When the power supply for the schedule timer is taken from the control circuit board of the indoor unit, that indoor unit cannot be used with other control devices using the T10 terminal.


As operation mode and temperature settings are not possible with the schedule timer, it must be used together with a remote controller, a system controller, an intelligent controller, etc. Also, as it does not have an address setting function, the control function of a system controller etc. must be used for address setting.

Up to 64 groups (max 64 indoor units) can be controlled divided into 8 timer groups


- Six program operations (Operation/Stop/ Local permission/ Local prohibition) per day can be set in a program for one week

- Only operation or stop, remote controller local permission or remote controller local prohibition, and their respective combinations are possible. (Operation + local permission, stop + local prohibition, only local permission, etc.)
- Local prohibition and the combination of the three items of temperature setting, mode change, and operation/stop can be set at the time of installation.

Connection example 1 (POWER SUPPLY FROM THE INDOOR UNIT)

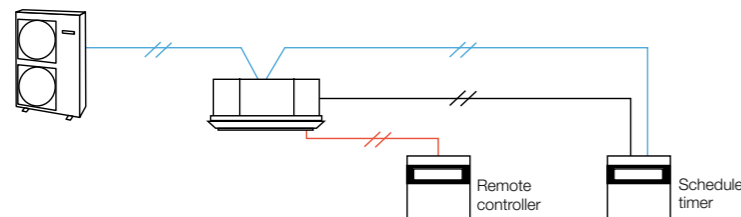

Connection example 2 (POWER SUPPLY FROM THE CENTRAL CONTROLLER)

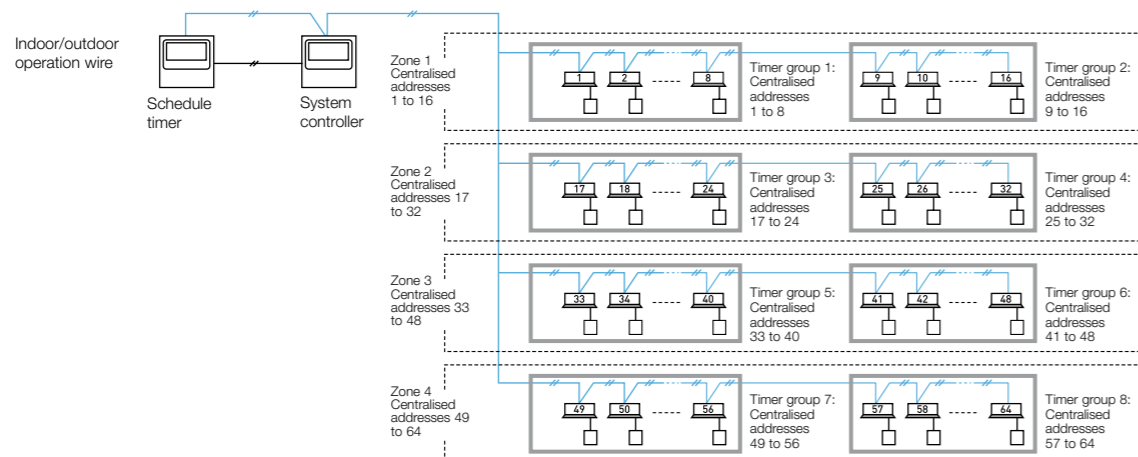

Centralised Control Systems

System controller (CZ-64ESMC2)



Dimensions
160 x W 160 x D 21 + 69
(embedding dimension mm)

Power supply: AC 220 to 240 V
I/O part: Remote input (effective voltage: DC 24 V); All ON/All OFF Remote output (voltage-free contact): All ON/ All OFF (external Power supply within DC 30 V, max 1 A)
Total wiring length : 1 km

- A control mode corresponding to the use condition can be selected from 10 patterns

A : Operation mode: Central control mode or remote control mode can be selected

Central control mode: The system controller is used as centralised control device. (Setting from a remote controller can be prohibited by prohibiting local operation from the system controller.)

Remote control mode: The system controller is used as a remote controller. (Setting from the system controller can be prohibited by prohibiting local operation from another central control unit.)

B : Controlled unit number mode: All mode or zone 1, 2, 3, 4 mode can be selected

All mode: All, zone, or group unit can be selected.

Zone 1, 2, 3, 4 mode: Setting is possible only for the indoor units of zone 1, 2, 3, or 4.

Individual control is possible for max 64 groups, 64 indoor units.

- Control of 64 indoor units divided into 4 zones. (One zone can have up to 16 groups, and one group can have up to 8 units.)
- Control is possible for ON/OFF, operation mode, fan speed, air flow direction (only when used without a remote controller), operation monitoring, alarm monitoring, ventilation, remote controller local operation prohibition, etc.


- Individual All operations are possible also from the remote controller. However, the contents will be changed to the contents of the controller operated last.
- Central 1 The remote controller cannot be used for ON/OFF. (All other operations are possible from the remote controller.)
- Central 3 The remote controller cannot be used for mode change or temperature setting change. (All other operations are possible from the remote controller.)
- Central 4 The remote controller cannot be used for operation mode change. (All other operations are possible from the remote controller.)

- Joint use with a remote controller, an intelligent controller, a schedule timer, etc. is possible

(The maximum number of connectable system controllers is 10, including other central controllers on the same circuit.)
(In case of joint use with a wireless remote controller, there are limitations for the control mode. Please use only with "Individual" and "Central 1".)

- Control of systems without a remote controller and of main/sub systems (a total of up to 2 units) is possible

Connection example			
		A Operation mode	
		Central control mode	Remote control mode
B Controlled unit number mode	All mode	All central control Example 1	All remote control
	Zone 1 mode	Zone 1 central control Example 2	Zone 1 remote control
	Zone 2 mode	Zone 2 central control	Zone 2 remote control Example 3
	Zone 3 mode	Zone 3 central control Example 4	Zone 3 remote control
	Zone 4 mode	Zone 4 central control	Zone 4 remote control Example 5

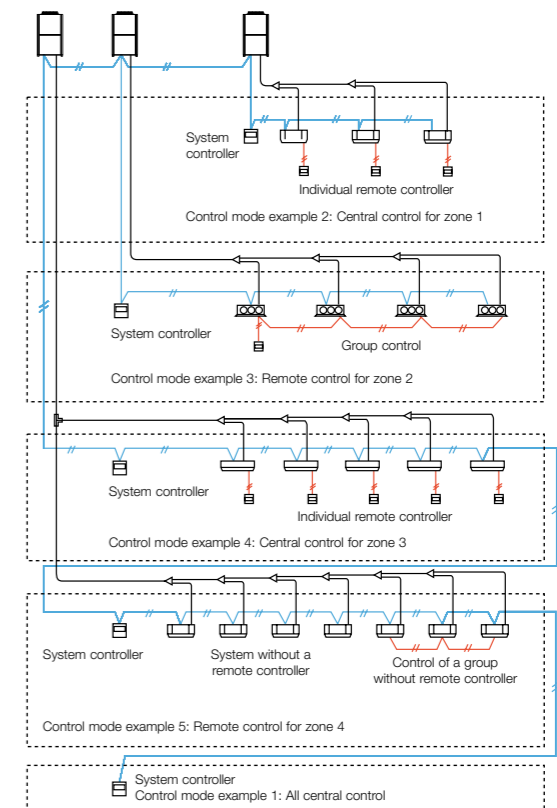

ON/OFF controller (CZ-ANC2)



Dimensions
H 121 x W 122 x D 14 + 52
(embedding dimension mm)

- 16 groups of indoor units can be controlled.
- Collective control and individual group (unit) control can also be performed.
- Up to 8 ON/OFF controller (4 main, 4 sub) can be installed in one link system.
- The operation status can be determined immediately.

Note: As operation mode and temperature settings are not possible with the ON/OFF controller, it must be used together with a remote controller, a system controller etc.

Power supply: AC 220 to 240 V
I/O part: Remote input (effective voltage: within DC 24 V); All ON/OFF
Remote output (allowable voltage: within DC 30 V); All ON, All alarm

Web Interface Systems

Web Interface (CZ-CWEBC2)



(Dimensions: H 248 x W 185 x D 80 mm)

AC 100 to 240 V (50/60Hz), 17 W (separate power supply)

Functions

- Access and operation by Web browser
- Icon display
- Language codes available in English, French, German, Italian, Portuguese, Spanish
- Individual control possible (max. 64 indoor units) ON/OFF operation mode, set temperature, fan speed, Flap set, timer on/off alarm code monitoring, prohibit Remote Control
- Zone control *
- All Units control
- Alarm Log
- Mail Sent Log
- Program Timer set 50 daily timers with 50 actions each day, 50 weekly timers, 1 holiday timer, 5 special day timers, for each tenant
- Prohibit Remote Control set
- IP ADDRESS could be changed via Internet

Note: It is recommended to install a remote controller or a system controller on site to enable local control if the network experiences a problem.

*Power supply



Easy to set to every room by recognisable icon and user-friendly remote control window
If any of the indoor units is selected, the remote control window shown will be displayed for detailed setting modifications.




Easy to manage and monitor each tenant use *
Each floor or tenant, otherwise each zone can be displayed and controlled. All unit statuses can also be displayed on one screen.



Program Timer set
50 daily timers with 50 actions each day, 50 weekly timers, holiday timer, 5 special day timers, for each tenant

* Web interface system not applicable for load distribution.

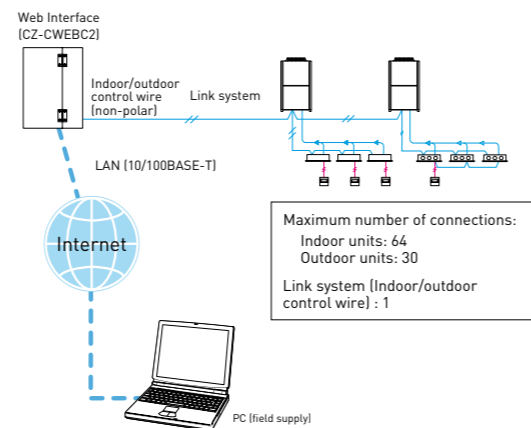

Maximum number of connections:
Indoor units: 64
Outdoor units: 30
Link system (Indoor/outdoor control wire) : 1

* Required when more than 129 indoor units are connected

Intelligent controller (CZ-256ESMC2)



Touch panel

Dimensions
H 240 x W 280 x D 138 mm
Power supply AC 100 to 240 V (50 Hz), 20 W (separate power supply)
I/O part Remote input (voltage-free contact): All ON/OFF
Remote output (voltage-free contact): All ON, All alarm (external power supply within DC 30 V, 0.5 A)
Total wiring length: 1 km for each system
Only for embedding in the panel

- Max 256 indoor units (4 systems x 64 units) can be controlled. In case of three or more systems (more than 129 units), a communication adapter CZ-CFUNC2 must be installed

- Operation is possible as batch, in zone units, in tenant and in group units

- ON/OFF, operation mode setting, temperature setting, for fan speed setting, air flow direction setting (when used without a remote controller), and remote controller local operation prohibition (prohibition 1, 2, 3, 4) can be done

- A system without a remote controller is possible. Joint use with a remote controller or a system controller is also possible

- Use of a schedule timer and holiday setting also can be done

- Proportional distribution of the air conditioning energy is possible. Including csv-file export via CF-card (supplementary accessory)

- NEW function: Pulse signal input from electric/gas consumption meter

In case of joint use with a wireless remote control system, there are limitations for the control mode. Please use only with "Permission" and "Prohibition 1".




Web application

• Limitation contents for prohibited operation

Prohibition means limitation of the operation contents from the remote controller. It is also possible to change the prohibition items.

Limitation contents (Limitations can be user defined)

- Individual There is no limitation for the operation of the remote controller. However, the contents will be changed to the contents of the controller operated last. (Last-pressed priority.)
- Prohibition 1 The remote controller cannot be used for ON/OFF. (All other operations are possible from the remote controller.)
- Prohibition 2 The remote controller cannot be used for ON/OFF, operation mode change and temperature setting. (All other operations are possible from the remote controller.)
- Prohibition 3 The remote controller cannot be used for operation mode change and temperature setting. (All other operations are possible from the remote controller.)
- Prohibition 4 The remote controller cannot be used for operation mode change. (All other operations are possible from the remote controller.)

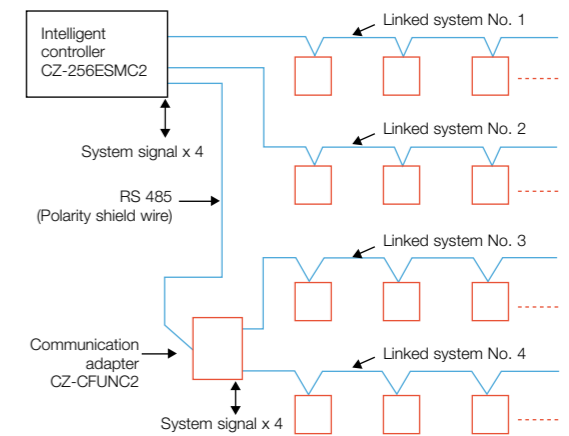

Display sample Max. 4 links can be connected for the indoor/outdoor operation line = Max. 64 indoor units x 4 (256 units) Max. 30 outdoor units x 4 (120 units)

Communication adaptor (CZ-CFUNC2)



* Required when more than 129 indoor units are connected.

Panasonic total air conditioning management system P-AIMS

P-AIMS Basic software / CZ-CSWKC2

Up to 1024 indoor units can be controlled by one PC

Functions of basic software

- Standard remote control for all indoor units
- Many timer schedule programs can be set on the calendar
- Detailed information display for alarms
- CSV file output with alarm history, operating status.
- Automatic data backup to HDD




With 4 upgrade packages the basic software can be upgraded to suit individual requirements



P-AIMS optional software CZ-CSWAC2 for Load distribution

Load distribution calculation for each tenant

- Air-conditioner load distribution ratio is calculated for each unit (tenant) with used energy consumption data (m3, kWh).
- Calculated data is stored with CSV type file.
- Data of last 365 days is stored

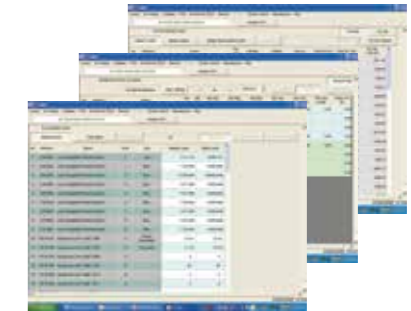

P-AIMS optional software CZ-CSWWC2 for Web application


Web access & control from remote station

- Accessing P-AIMS software from remote PC.
- You can monitor/operate FSV systems by using Web browser (Internet Explorer).



The P-AIMS is ideal for large areas/buildings such as shopping centers, universities and office buildings.

Up to eight Communication Adaptors (C/A) can be connected to a P-AIMS to enable control of 1024 indoor units with one "P-AIMS" PC.

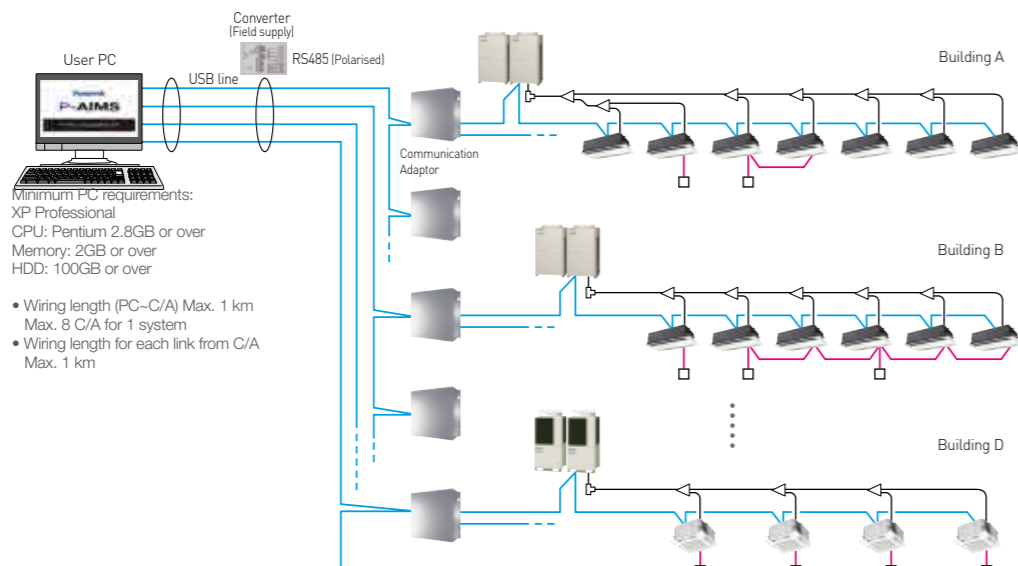

P-AIMS optional software CZ-CSWGC2 for Object layout display

Whole system can be controlled visually


- Operating status monitor is available on the layout display.
- Object's layout and indoor unit's location can be checked at once.
- Each unit can be controlled by virtual remote controller on the display.
- Max 4 layout screens are shown at once.



P-AIMS optional software CZ-CSWBC2 for BACnet software interface

Connectable to BMS system

- Can communicate with other equipment by BACnet protocol.
- FSV systems can be controlled by both BMS and P-AIMS.
- Max 255 indoor units can be connected to 1 PC (that has P-AIMS basic & BACnet software).

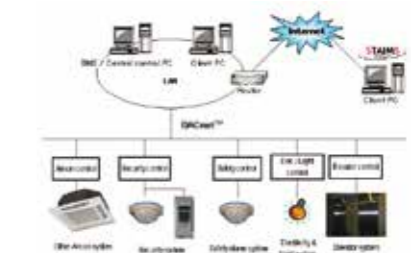


T10 Terminal for External Control (Digital Connection)

Connecting an FSV indoor unit to an external device is easy. The T10 Terminal featured in the electronic circuit board of all indoor units enables digital connection to external devices.




1. T10 Terminal Specification (T10:CN061 at indoor unit PCB)

- Control items:
 - Start/stop input (eg hotel key card, push button operation)
 - Remote controller prohibit input
 - Operation status output (eg fresh air fan)
 - Fault status output

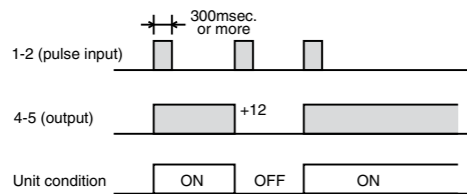

NOTE: The wire length from indoor unit to the Relay must be within 2.0m. Pulse signal changeable to static with JP cutting. (Refer to JP001)

Example of wiring




Condition

- 1-2 (Pulse input): Unit ON/OFF condition switching with a pulse signal. (1 pulse signal: shortage status more than 300msec.or more)
- 2-3 (Static input): Open/ Operation with Remote is permitted.(Normal condition) Close/ Remote controller is prohibited.
- 3-4 (Static output): 12V output during the unit ON. / No output at OFF.
- 4-5-6 (Static output): 12V output when some errors occur / No output at normal.

2. Usage Example

Forced OFF control


- Condition: 1-2 (Static input): Close/ Operation with Remote is permitted. (Normal condition) Open/ Unit is forcibly OFF and Remote controller operation is prohibited.

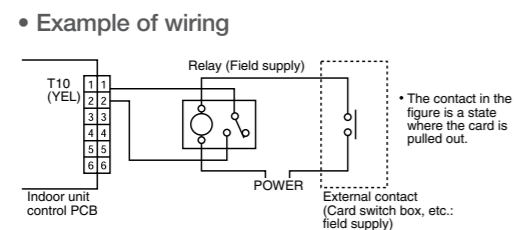

NOTE: The wire length from indoor unit to the Relay must be within 2.0m

Operation ON/OFF signal output

- Condition: 4-5 (Static output): 12V output during the unit ON / No output at OFF

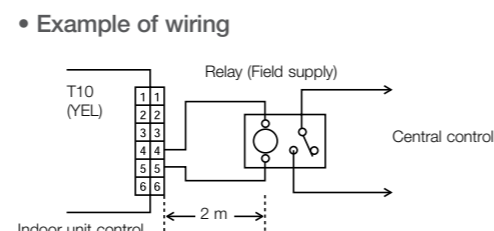


NOTE: The wire length from indoor unit to the Relay must be within 2.0m. Pulse signal changeable to static with JP cutting. (Refer to JP001)

Interfaces for External Control (Digital Connection)

Seri-Para I/O unit for each indoor unit (CZ-CAPBC2)



System example

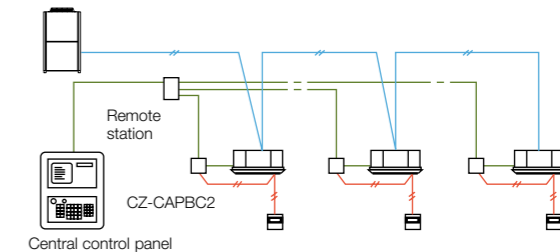


- Control and status monitoring is possible for individual indoor unit (1 group).
- In addition to operation and stop, there is a digital input function for air speed and operation mode.
- Temperature setting and measuring of the indoor suction temperature can be performed from central monitoring.
- The analog input for temperature setting is 0 to 10 V, or 0 to 140 Ohm.
- Power is supplied from the T10 terminal of the indoor units.
- Separate power supply also is possible (in case of suction temperature measuring).

Interface adaptor (CZ-CAPC2)



System example

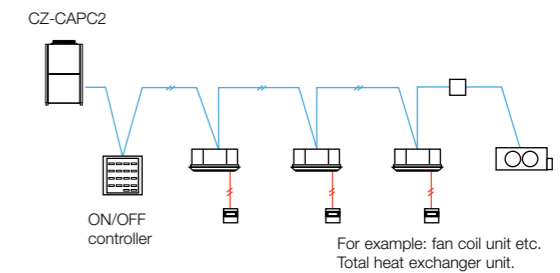


- Control and status monitoring is possible for individual indoor unit (or any external electrical device up to 250 V AC, 10 A) by contact signal.

Seri-Para I/O unit for outdoor unit (CZ-CAPDC2)



System example

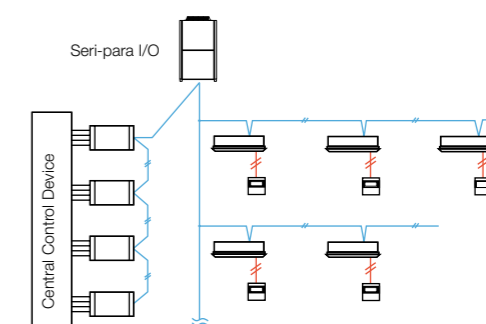


- Dimensions: H 80 x W 290 x D 260 mm
- Power supply: Single phase 110-120/220-240 V (50/60 Hz), 18 W
- Input: Batch operation/Batch stop (non-voltage contact/DC 24 V, pulse signal), Cooling/Heating (non-voltage contact/static signal), Demand 1/2 (non-voltage contact/static signal) (Local stop by switching)
- Output: Operation output (non-voltage contact), Alarm output (non-voltage contact)
- Wiring length: Indoor/Outdoor operation lines: Total length 1 km. Digital signal: 100 m or shorter

- This unit can control up to 4 outdoor units.
- From the centre control device, mode changing and batch operation/batch stop are possible.
- Required for demand control.

Serial Interface for 3rd Party External Controller

Example of 3rd party BMS connection with CZ-CFUNC2
(For the detail please consult to authorized dealer)

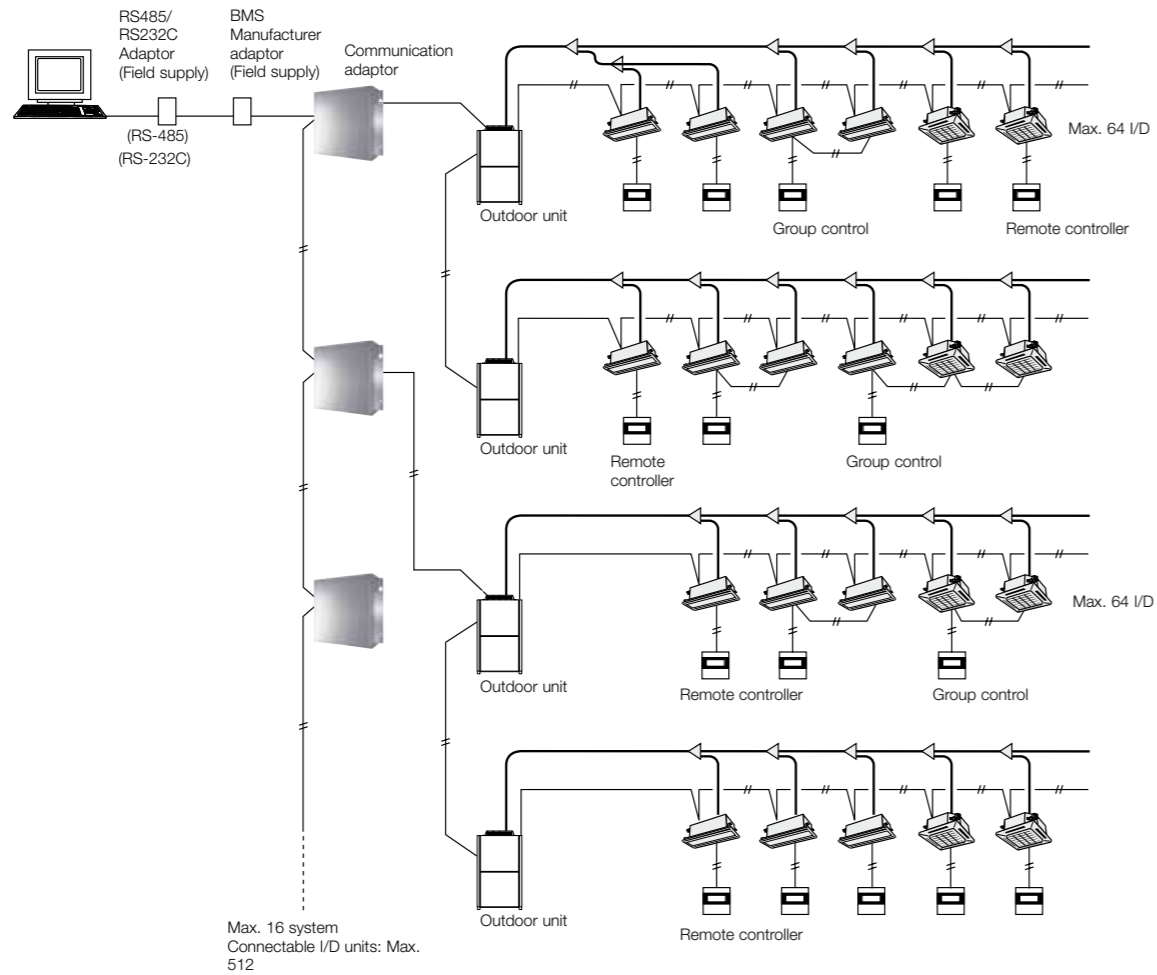

Functions via communication adaptor (CZ-CFUNC2)	
A/C unit settings	Unit ON/OFF
	Mode-change
	Room temperature setting
	Fan speed setting
	Flap setting
	Central control setting
	Filter-sign clear
	Alarm reset
A/C unit status	Unit ON/OFF status
	Operation mode
	Setting temperature
	Fan speed status
	Flap status
	Central control setting
	Filter-sign situation
	Correct/incorrect status
Alarm code	

Communication Adaptor (CZ-CFUNC2)

Up to 128 indoor units can be connected to one Communication Adaptor.


Serial Interface for LonWorks Network

LonWorks Interface (CZ-CLNC2)



- This interface is a communications converter for connecting LonWorks to the control network of FSV.
- From the host connected to LonWorks, basic settings and status monitoring is possible for up to 16 groups of A/C units.

System example

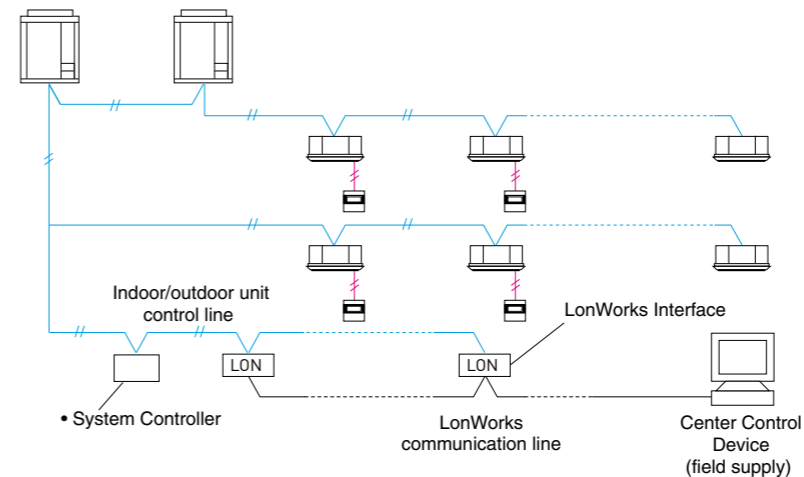


Functions


A/C unit settings from the LonWorks communicator	Settings for each group of indoor units	Start/stop
		Temp. setting
	Settings for all units	Operation mode
		Option 1 settings(*)
		Option 2 settings(*)
A/C unit status notifications made to the LonWorks communicator	Emergency stop	
	Start/stop	
	Temp. setting	
	Operation mode	
	Option 1 settings(*)	
	Option 2 settings(*)	
	Alarm status	
	Indoor units with active alarms	
	Room temp.	
	A/C unit status	
Configuration properties	Transmission intervals settings	
	Minimum time secured for transmission	

FSV Controller External Dimensions


TIMER REMOTE CONTROLLER (CZ-RTC2)




WIRELESS REMOTE CONTROLLER




SEPARATE RECEIVER FOR WIRELESS REMOTE CONTROLLER (CZ-RWSC2)

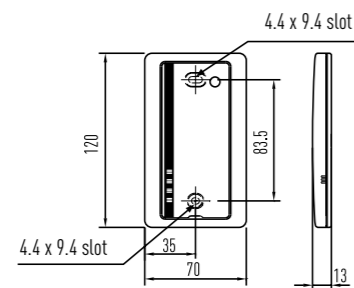


SIMPLIFIED REMOTE CONTROLLER (CZ-RE2C2)

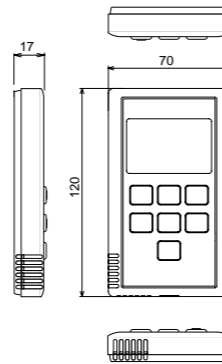


SYSTEM CONTROLLER (CZ-64ESMC2)

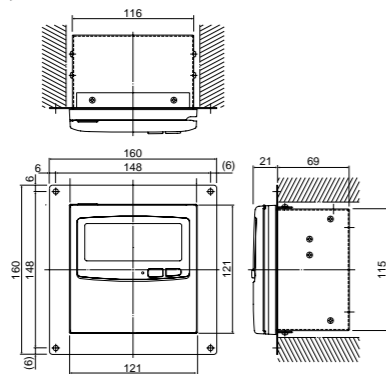


BACKLIT REMOTE CONTROLLER (CZ-RELC2) REMOTE SENSOR (CZ-CSRC2)




COMMUNICATION ADAPTOR (CZ-CFUNC2)

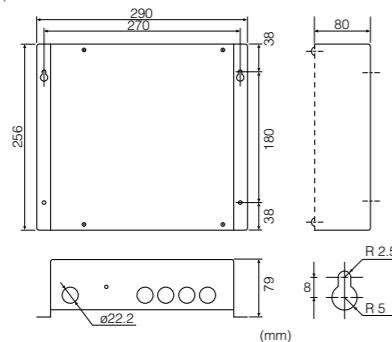


INTELLIGENT CONTROLLER (CZ-256ESMC2)

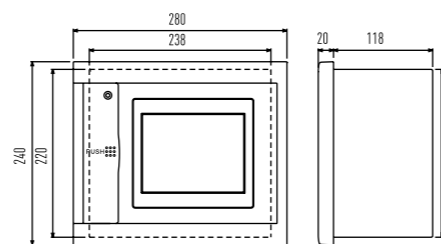


ON/OFF CONTROLLER (CZ-ANC2)

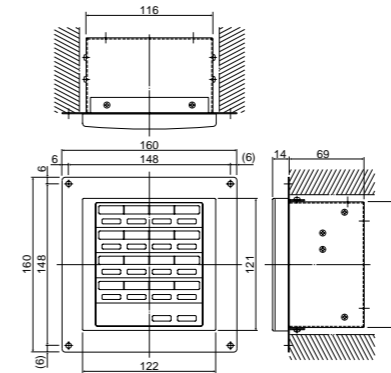


SERI-PARA I/O UNIT FOR EACH INDOOR UNIT (CZ-CAPBC2)



LONWORKS INTERFACE (CZ-CLNC2)

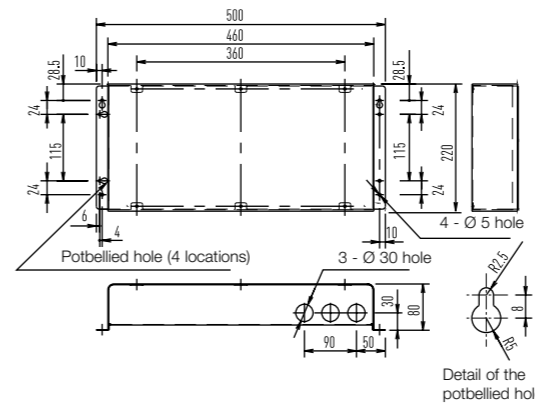

SERI-PARA I/O UNIT FOR OUTDOOR UNIT (CZ-CAPDC2)

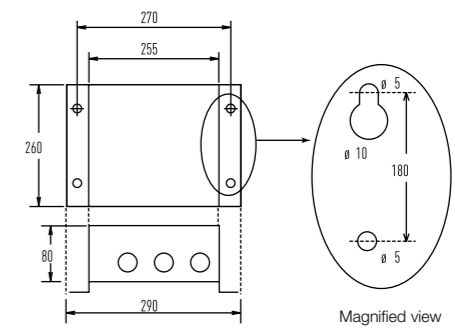

VRF Renewal

An important drive to further reduce the potential damage to our ozone



R22 is a HCFC and classified as an ozone depleting substance banned under the Montreal Protocol. Many existing R22 VRF Systems will need to be replaced over the coming years by more modern and efficient R410A VRF Systems.

Panasonic takes proactive action to switch to R410A refrigerant

Recognising consumers' anxiety and financial difficulties to adapt to the new R22 regulations, Panasonic developed a new cost-effective and simple solution to switch to R410A refrigerant.

What is Panasonic VRF Renewal?

Panasonic VRF Renewal enables reuse of good quality existing R22 pipe work to be installed with a new high efficiency R410A system.

What's so unique about Panasonic's solution?

By enabling reuse of existing R22 piping, consumers get to save substantially from reduced installation cost, and without any sacrifices to warranty or performance.

Ozone Depletion Potential		
R22	HCFCs	0.055
R410A	HFC	0
R407C	HFC	0

R22 - The reduction of Chlorine critical for a cleaner future

Before renewing piping, be sure to contact an authorised Panasonic dealer for advice.

VRF Renewal

Panasonic's Renewal system allows a completely new VRF system, indoor and outdoor units, to be installed using the existing systems pipe work. Panasonic's advanced technology enables the system to work with previously installed pipe work by managing the working pressure within the system down to R22 (3.3 bar) levels. This ensures the system works safely and efficiently without loss of capacity.

The new equipment has potential to increase COP/EER by using state of the art inverter compressor and heat exchanger technology.

Having contacted your Panasonic supplier regarding pipe work restrictions and gained approval to use the Panasonic Renewal System there are three main tests that have to be carried out to ensure that the system can be used effectively.


Firstly a thorough inspection of the pipe work must be carried out and any damage must be repaired.

Secondly an oil test has to be carried out to ensure that the system has not been subject to a compressor burnout during its lifetime.

Lastly a VRF Renewal Kit (CZ-SLK2) has to be installed within the pipe work to ensure that the system is cleaned of any oil residue.

VRF Renewal Kit (CZ-SLK2) and Sight Glass

The following shows an overview of the VRF Renewal Kit (CZ-SLK2) that is required when existing tubing is reused. If the exact tube length and tube size of the existing tubing are uncertain, attach a sight glass in accordance with the figure below. It will be used for checking the amount of additional refrigerant charge (calculating the amount in Judgment 4 see page 96).

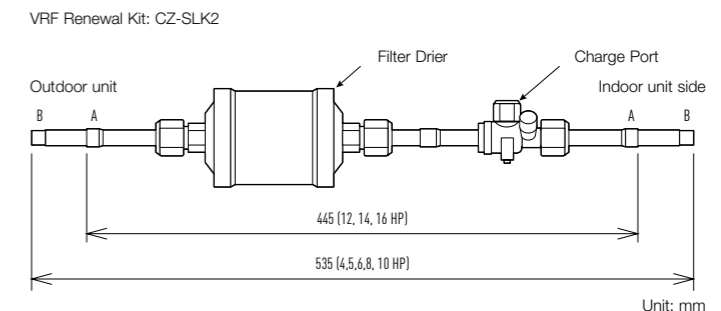

Attaching the Renewal Kit and sight glass

- To adjust the limited pressure level into 3.3 MPa, special setting is necessary on site.
- A filter drier shall be attached to the liquid tubing of each outdoor unit.
- Do not need to remove Renewal Kit after a test run is performed as it can be retained for normal operation.
- When attaching Renewal Kit, be extra careful with regards to installation location and orientation of the filter drier and ball valve. Any mistakes will complicate maintenance work.
- Thermal insulation material (field supply: heat resistance of 80°C or higher and thickness of 10 mm or greater) shall be applied to the Renewal Kit.
- The filter drier of the Renewal Kit may need to be replaced depending on the condition of the existing unit. Use a Danfoss DMB 164 as the replacement filter drier (field supply).

Connecting tube dimensions (Inch mm)

- A Ø 1/2 (12.7) (12,14,16 HP)
- B Ø 3/8 (9.52) (8,10 HP)

Note: If the tube size does not match that of the existing tubing, use a reducer (field supply) to adjust the tube diameter.

Sight glass (field supply)

If the exact tube length and tube size of the existing tubing are uncertain, attach a sight glass to the liquid tubing, and use it to check whether there is an appropriate amount of additional refrigerant charge.

